
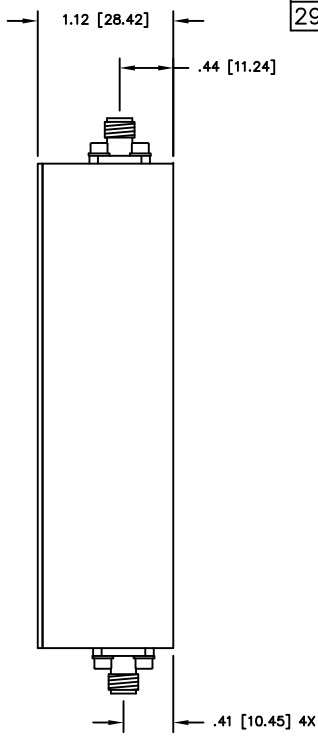


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1481	A	INITIAL RELEASE	DG	5-08
1505	B	REVISE ISOLATION SPECIFICATION	DG	8-08
2449	C	SEE DAR	DG	4-10
2450	D	SEE DAR	DG	4-10
2970	E	SEE DAR	TJD	3-11

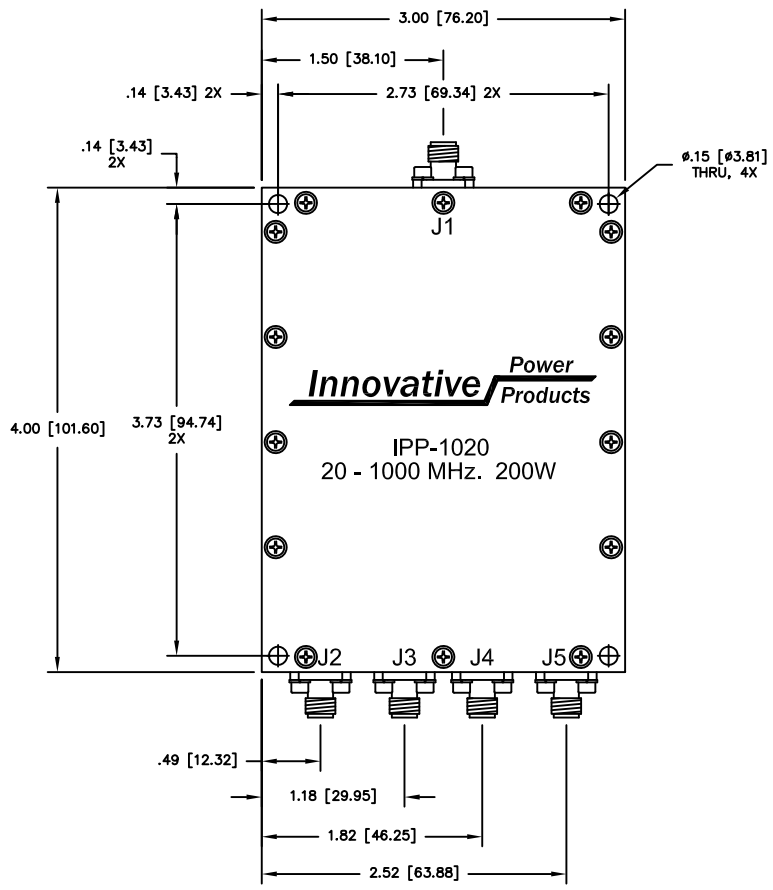

Innovative Power Products
IPP-1020
20 - 1000 MHz. 200W

- NOTES:**
- CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.
 - RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

- FREQUENCY: 20 - 1000 MHz.
- INSERTION LOSS: < 0.75 dB
- VSWR: < 1.30:1
- PHASE BALANCE: ±5°
- AMPLITUDE BALANCE: ±0.25 dB
- POWER: 200 WATT
- ISOLATION: >12 dB 20-125 MHz
>15 dB 125-1000 MHz
- TEMPERATURE: -55°C TO 85°C

MATERIAL	AL. ALLOY	DWN	DG	DATE	5-08	Innovative Power Products
	6061-T651	ENG	TJD	DATE	5-08	
FINISH	CHEM FILM CLEAR	MANUF	TP	DATE	5-08	TITLE
	PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	CAGE CODE: 437R2			OUTLINE	
TOLERANCE	.XX ±.02	SHEET	OF	SCALE	1:1	4 - WAY 20 - 1000 MHz 200 WATT
	.XXX ±.010					SIZE
	ANG. ±1/2°	1	1			E