

UF220APA-F series



(259 dia. x 97.8 mm)
 10.20 dia. x 3.85 inches

Features: integrated mounting plate acts as inlet ring

Operating voltage: 115 or 230 VAC

Construction: aluminum die cast motor base;
 UL94V-0 reinforced nylon impeller



Bearing option: ball bearing

Motor: permanent split capacitor
 required capacitor included

Air Flow: centrifugal

Connection: 22 AWG lead wires

Protection: thermal

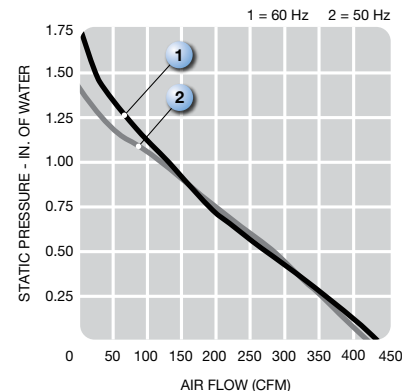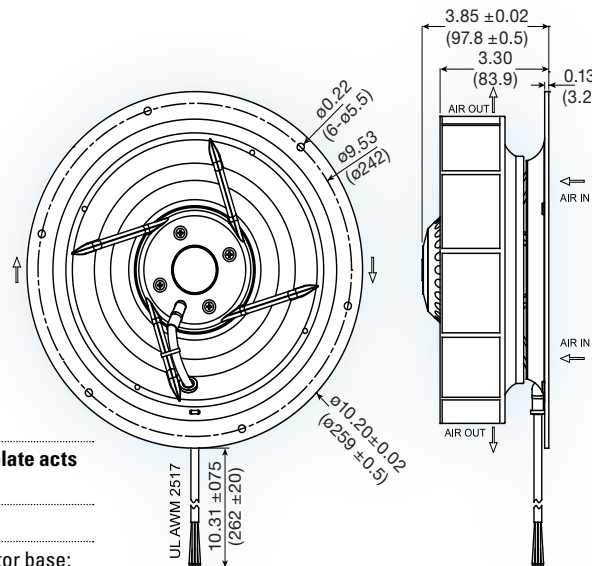

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF220APA12-H2C2F	115	50	90	0.63	0.88	2,500	12.0	424	36	1.4	64	1.9
	115	60	117	0.80	0.93	2,650	12.3	434	45	1.7	65	1.9
UF220APA23-H2C2F	230	50	90	0.35	0.47	2,500	12.0	424	36	1.4	64	1.9
	230	60	117	0.39	0.49	2,650	12.3	434	45	1.7	65	1.9