

SCHMATIC

SPECIFICATIONS

FUNCTION:
2P2T ON-(ON)




RATING:
ANSI/UL 1054 and CAN/CSA C22.2 No.55 (E194579):
16A 125VAC [cUrus]
12A 250VAC [cUrus]
1HP 125/250VAC [cUrus]

CONTACT RESISTANCE:
Initial: 10mΩ Max.

TEMPERATURE:
Operating: 0°C to 85°C [cUrus]

ELECTRICAL LIFE:
6,000 Cycles [cUrus]

APPROVALS:
ROHS
COMPLIANT

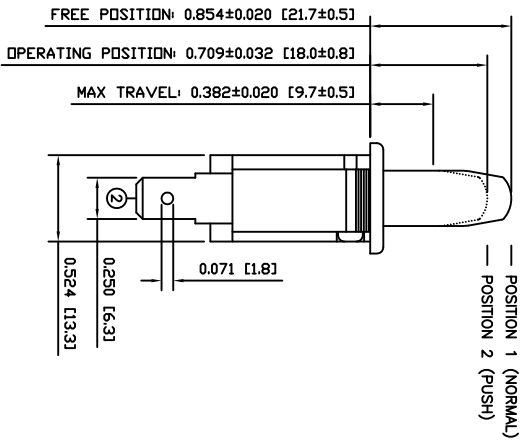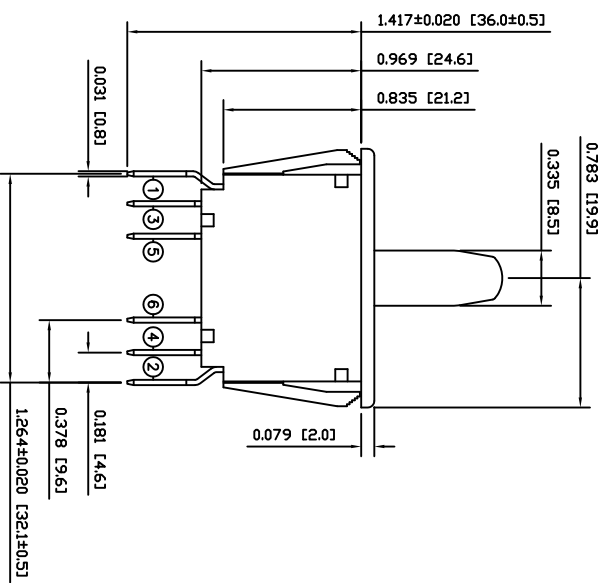

0.531 [13.5]

SUGGESTED PANEL CUTOUT

ACTUATOR BODY	B	10/07/28	CAB
COLORS	A	09/10/28	CAB
MATERIALS	B	10/07/19	CAB
SPECIFICATIONS	C	10/07/19	CAB
REFERENCE	REV.	DATE	BY

1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

INITIAL RELEASE DESCRIPTION	A	REV.
-----------------------------	---	------

2

INITIAL RELEASE DESCRIPTION	18277	10/08/18	CAB
DATE	PCB	DATE	DRAWN BY


3

DIMENSIONS	INCHES [MILLIMETERS]
GENERAL TOLERANCES	±0.008 [±0.2] / ±1'
SCALE	DRAWING NOT TO SCALE
PROJECTION	1ST ANGLE

4

DATE	REVISION
SEPTEMBER 16, 2010	A

5



PP2-4H7-2A2

6

7

8