

DEC

SS22 THRU SS210


CURRENT 2.0Amperes
VOLTAGE 20 to 100 Volts

Features

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- For surface mount applications
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed : 250 °C/10 seconds at terminals

Mechanical Data

- Case : JEDEC SMA(DO-214AC) molded plastic body
- Terminals : Solder Plate, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Weight : 0.002 ounce, 0.064 gram

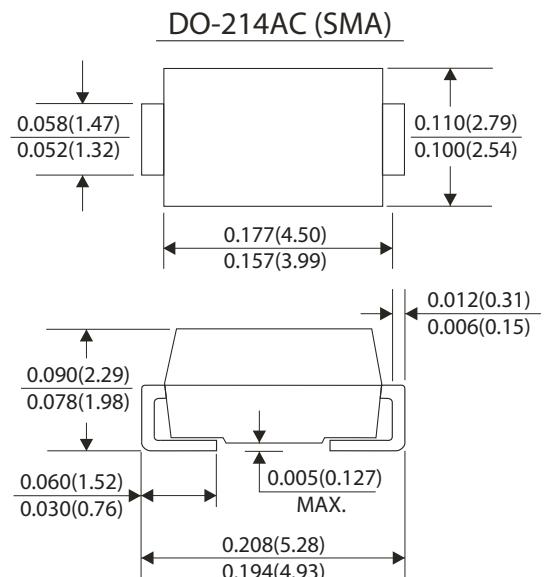

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	SS22	SS23	SS24	SS25	SS26	SS28	SS29	SS210	Units						
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	90	100	Volts						
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	63	70	Volts						
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	90	100	Volts						
Maximum average forward rectified current 0.375"(9.5mm) lead length(see Fig. 1)	I _(AV)	2.0								Amps						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	50.0								Amps						
Maximum instantaneous forward voltage at 2.0A (Note 1)	V _F	0.55		0.70		0.85				Volts						
Maximum instantaneous reverse current at rated DC blocking voltage (Note1)	T _A =25 °C	I _R	1.0													
	T _A =100 °C		20													
Typical thermal resistance (Note 2)	R _{θJA}	75								°C/W						
Operating junction temperature range	T _J	-50 to +125								°C						
Storage temperature range	T _{TG}	-65 to +150								°C						

Notes:

- (1) Pulse test: 300μS pulse width, 1% duty cycle
- (2) Thermal resistance junction to ambient

DEC

RATINGS AND CHARACTERISTIC CURVES SS22 THRU SS210

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

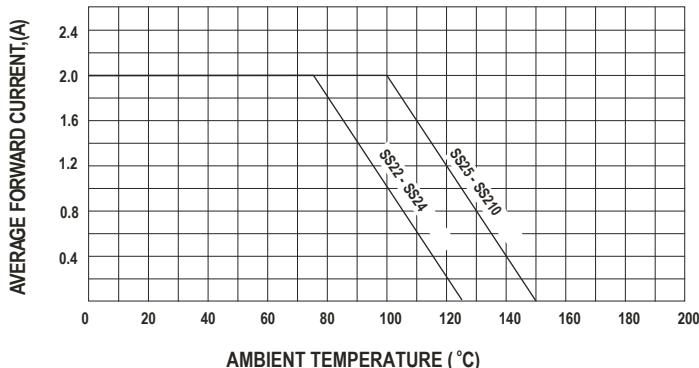


FIG.3-MAXIMUM NON-REPETITIVE FORWARDSURGE CURRENT

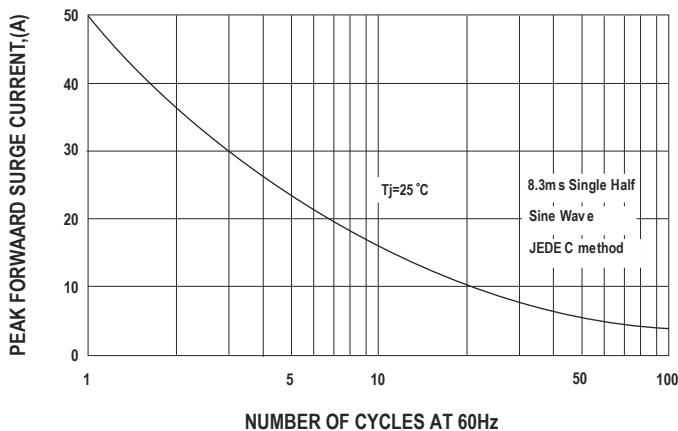


FIG.4-TYPICAL JUNCTION CAPACITANCE

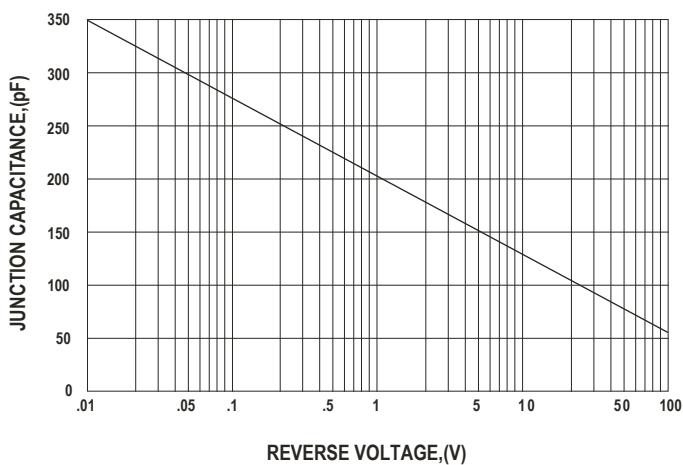


FIG.2-TYPICAL FORWARDCHARACTERISTICS

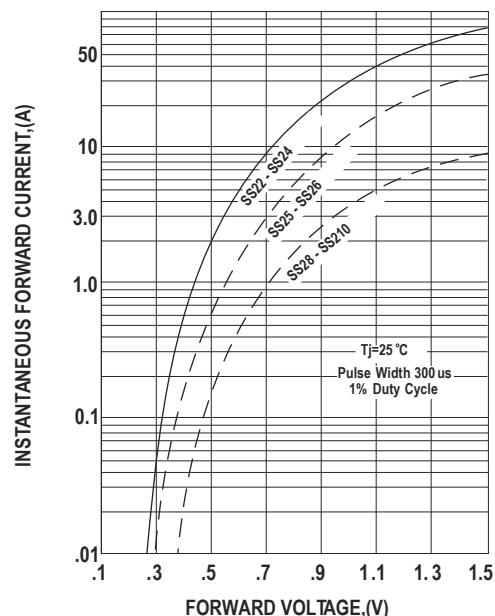


FIG.5 - TYPICAL REVERSECHARACTERISTICS

