

MINI 980/1550nm WDM/ISOLATOR HYBRID

Mini WDIH59 Series

Features

- Wide Operating Wavelength Range
- Compact Size
- High Isolation
- Ultra Low PDL & PMD
- Highly Stable & Reliable
- Small Package Dimension
- Epoxy-Free Optical Path

Applications

- EDFA

Mini 980/1550nm WDIH FOR EDFA

Oplink's WDIH is a combination of a 980/1550(1585)nm filter and a C-band 1550nm (or L-band 1585nm) polarization insensitive optical isolator. The Mini WDIH is a low cost model with excellent performance including low insertion loss, high isolation, high return loss, and low polarization dependent loss (PDL). This product offers integrated solutions to EDFA applications by combining more functions into a very compact package. The product package dimension is about 3.0x30mm.

Oplink can provide customized designs to meet specialized feature applications. Also, Oplink offers modular assemblies that integrate other components to form a full function module or subsystem.



Performance Specifications


Parameter			Min	Typical	Max.	Units
Wavelength Range (λ_s)			1528 ~ 1564 or 1570 ~ 1604			nm
Pump channel Wavelength Range (λ_p)			965~995			nm
Channel Isolation (over λ_s , 0~70°C, all SOP)	Single Stage		21			dB
	Dual Stage		36			dB
Isolation (Pump Channel @ λ_s)			15			dB
Isolation (Signal Channel @ λ_p)			25			dB
Insertion Loss (Over wavelength range and 0~70°C, all SOP)	Pump channel				0.5	dB
	Signal channel	Single Stage			0.9	dB
		Dual Stage			1.1	dB
		WDL				0.2
Return Loss			50			dB
Polarization Dependent Loss (PDL)	Single Stage				0.10	dB
	Dual Stage				0.15	dB
Polarization Mode Dispersion (PMD)	Single Stage				0.25	ps
	Dual Stage				0.05	ps
Directivity			50			dB
Maximum Power Handling					500	mW
Operating temperature			0		70	°C
Storage temperature			-40		85	°C
Fiber Type	COM & Pump Ports		PureMode H11060 FLEX			
	Pass Port		SMF-28, 250 μ m Bare Fiber			
Package Dimension			(p)3.0 x (L)30			mm

Oplink Fiber Optic Product Lines

Amplifier Components
Amplifier Modules
DWDMs
Switching/Routing/
Monitoring/ Conditioning
Transmission
RGB Laser Modules

MINI 980/1550NM WDM/ISOLATOR HYBRID

Mechanical Footprint Dimension (unit: mm)

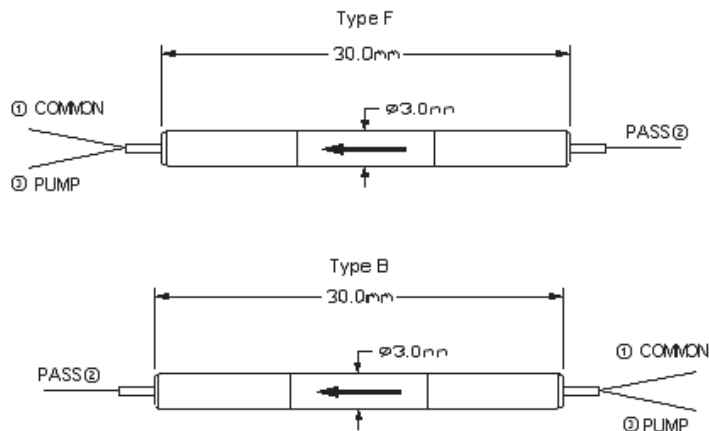

Ordering Information

Oplink can provide a range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

