

LPH80A99 series



(80 x 80 x 38 mm)
3.15 x 3.15 x 1.50 inches

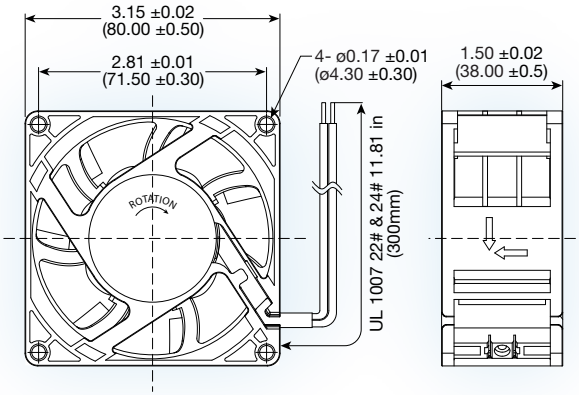

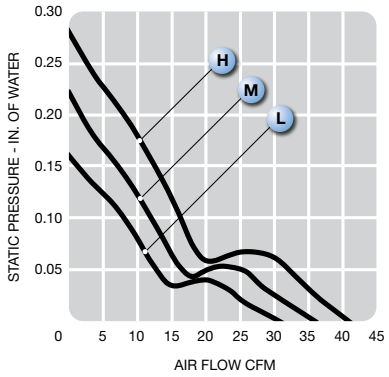

Operating voltage:	85 to 265 VAC
Construction:	plastic frame and impeller
Bearing option:	ball bearing
Motor:	electronically commutated
Air flow:	exhaust over struts
Connection:	lead wire UL1007 24AWG or terminal
Protection/IP Level:	auto restart / IP54
Options:	tachometer, PWM, environmental protection

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	g
LPH80A99-L*	100-240	50/60	2.7	0.04	3000	0.87	31	4.1	0.16	24	162
LPH80A99-M*	100-240	50/60	3.2	0.06	3500	1.01	36	5.6	0.22	27	162
LPH80A99-H	100-240	50/60	5.5	0.09	4000	1.15	41	7.1	0.28	31	162

*This speed not UL recognized