Chip Inductors for Critical Applications ST413RAB

- Lower DCR than other 1008 inductors
- Ferrite construction for high current handling
- Inductance values: 1.0 – 100 µH

Part number[1]	Inductance[2] (µH)	Percent tolerance	Q min[3]	SRF min[4] (MHz)	DCR max[5] (Ohms)	Imax (mA)
ST413RAB102XJLZ	1.0 @ 7.9 MHz	5	16 @ 2.5 MHz	230	0.62	370
ST413RAB122XJLZ	1.2 @ 7.9 MHz	5	18 @ 2.5 MHz	210	0.68	370
ST413RAB152XJLZ	1.5 @ 7.9 MHz	5	20 @ 2.5 MHz	190	0.76	370
ST413RAB182XJLZ	1.8 @ 7.9 MHz	5	20 @ 2.5 MHz	170	0.84	370
ST413RAB222XJLZ	2.2 @ 7.9 MHz	5	28 @ 2.5 MHz	150	1.10	310
ST413RAB272XJLZ	2.7 @ 7.9 MHz	5	20 @ 2.5 MHz	135	1.28	270
ST413RAB332XJLZ	3.3 @ 7.9 MHz	5	20 @ 2.5 MHz	120	1.46	260
ST413RAB392XJLZ	3.9 @ 7.9 MHz	5	22 @ 2.5 MHz	105	1.56	250
ST413RAB432XJLZ	4.3 @ 7.9 MHz	5	24 @ 2.5 MHz	85	1.70	230
ST413RAB472XJLZ	4.7 @ 7.9 MHz	5	24 @ 2.5 MHz	90	1.68	230
ST413RAB502XJLZ	5.0 @ 7.9 MHz	5	23 @ 2.5 MHz	30	2.20	200
ST413RAB562XJLZ	5.6 @ 7.9 MHz	5	23 @ 2.5 MHz	80	1.82	220
ST413RAB622XJLZ	6.2 @ 7.9 MHz	5	24 @ 2.5 MHz	75	2.50	195
ST413RAB682XJLZ	6.8 @ 7.9 MHz	5	24 @ 2.5 MHz	70	2.00	210
ST413RAB822XJLZ	8.2 @ 7.9 MHz	5	23 @ 2.5 MHz	65	2.65	190
ST413RAB912XJLZ	9.1 @ 7.9 MHz	5	25 @ 2.5 MHz	57	2.90	170
ST413RAB103XJLZ	10 @ 7.9 MHz	5	24 @ 2.5 MHz	60	2.95	165
ST413RAB123XJLZ	12 @ 2.5 MHz	5	28 @ 2.5 MHz	38	3.30	160
ST413RAB153XJLZ	15 @ 2.5 MHz	5	28 @ 2.5 MHz	30	3.70	150
ST413RAB183XJLZ	18 @ 2.5 MHz	5	28 @ 2.5 MHz	26	4.00	140
ST413RAB223XJLZ	22 @ 2.5 MHz	5	28 @ 2.5 MHz	22	6.14	115
ST413RAB273XJLZ	27 @ 2.5 MHz	5	28 @ 2.5 MHz	12	6.45	110
ST413RAB333XJLZ	33 @ 2.5 MHz	5	30 @ 2.5 MHz	19	7.00	110
ST413RAB393XJLZ	39 @ 2.5 MHz	5	29 @ 2.5 MHz	26	10.0	90
ST413RAB473XJLZ	47 @ 2.5 MHz	5	30 @ 2.5 MHz	12	10.7	80
ST413RAB563XJLZ	56 @ 2.5 MHz	5	20 @ 0.79 MHz	8.0	10.0	95
ST413RAB683XJLZ	68 @ 0.79 MHz	5	17 @ 0.79 MHz	5.7	13.5	85
ST413RAB104XJLZ	100 @ 0.79 MHz	5	18 @ 0.79 MHz	4.5	20.5	65

1. When ordering, please specify **termination** and **testing** codes:

ST413RAB104JLZ

Termination: **L** = RoHS compliant silver-palladium-platinum-glass frit.
Special order:
T = Tin-silver-copper (95.5/4/0.5) over silver-palladium-platinum-glass frit or
S = Tin-lead (63/37) over silver-palladium-platinum-glass frit.

Testing: **Z** = COTS
H = Screening per Coilcraft CP-SA-10001

2. Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer or equivalent with Coilcraft-provided correlation pieces.
3. Q measured using an Agilent/HP 4291A with an Agilent/HP 16197 test fixture or equivalents.
4. SRF measured using an Agilent/HP 8753ES network analyzer or equivalent with a Coilcraft SMD-D fixture.
5. DCR measured on a Keithley 580 micro-ohmmeter or equivalent and a Coilcraft CCF858 test fixture.
6. Electrical specifications at 25°C.

Refer to Doc 362 “Soldering Surface Mount Components” before soldering.

Core material Ceramic/Ferrite

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 38.3 – 41.0 mg

Ambient temperature –40°C to +85°C with Imax current, +85°C to +100°C with derated current

Storage temperature Component: –55°C to +100°C. Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 2000/7″ reel; 7500/13″ reel. Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 2.0 mm pocket depth

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com


© Coilcraft, Inc. 2012

Document ST103-1 Revised 12/05/12


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ST413RAB Series (1008)


Typical Q vs Frequency

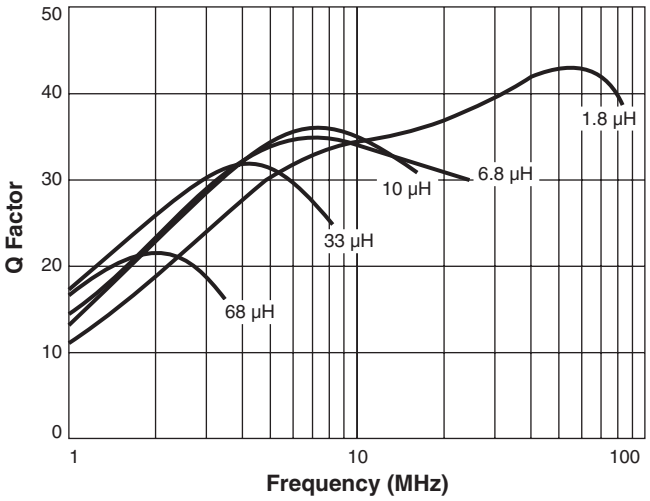


Typical L vs Frequency

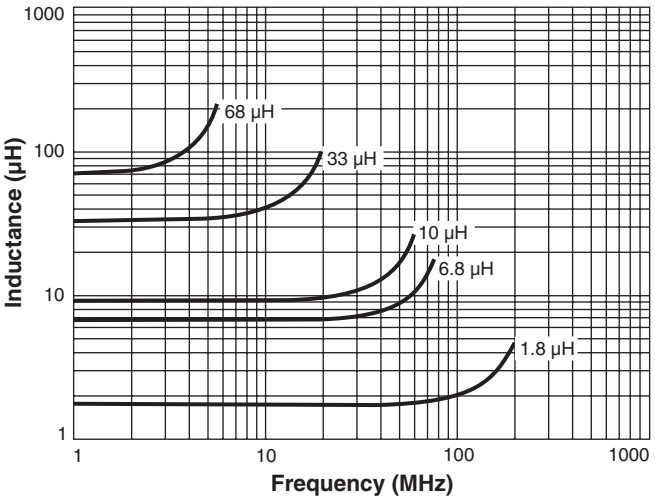

Current Derating

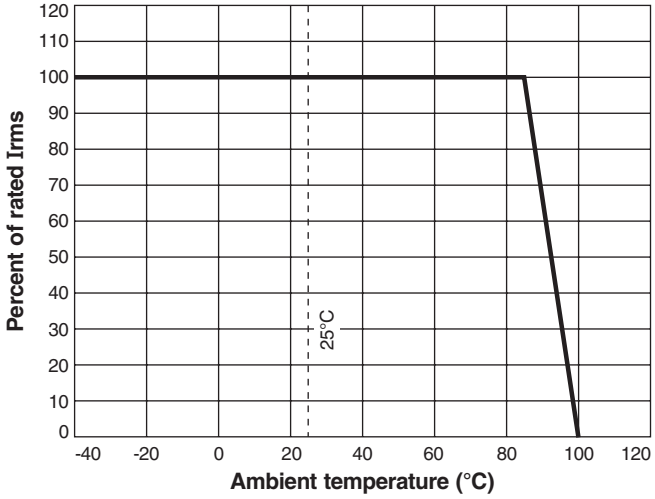

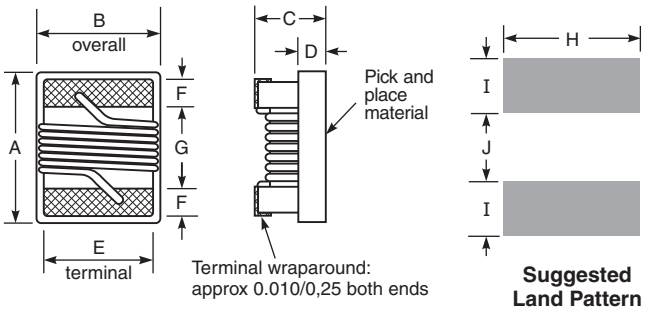

A max	B max	C max	D ref	E	F	G	H	I	J	
0.115	0.110	0.080	0.020	0.080	0.020	0.060	0.100	0.040	0.050	inches
2,92	2,79	2,03	0,51	2,03	0,51	1,52	2,54	1,02	1,27	mm

Note: Dimensions are before optional solder application. For maximum overall dimensions including solder, add 0.0025 in / 0,064 mm to **B** and 0.006 in / 0,15 mm to **A** and **C**.

COILCRAFT PRECISION TEST FIXTURES
ACCURATE REPEATABLE MEASUREMENTS
SEE WEB SITE

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES
1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363
Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ST103-2 Revised 12/05/12

© Coilcraft, Inc. 2012
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.