ALPHA & OMEGA SEMICONDUCTOR, LTD

AOD466
N-Channel Enhancement Mode Field Effect Transistor


General Description

The AOD466 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. This device is suitable for use in PWM, load switching and general purpose applications. *Standard Product AOD466 is Pb-free (meets ROHS & Sony 259 specifications). AOD466L is a Green Product ordering option. AOD466 and AOD466L are electrically identical.*


Features

V_{DS} (V) = 25V
I_D = 30A (V_{GS} = 10V)
$R_{DS(ON)}$ < 14 mΩ (V_{GS} = 10V)
$R_{DS(ON)}$ < 24 mΩ (V_{GS} = 4.5V)

TO-252
D-PAK



Top View
Drain Connected to Tab



Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	25	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current [G]	T_C=25°C	I_D	30	A
	T_C=100°C		25	
Pulsed Drain Current [C]		I_{DM}	70	
Avalanche Current [C]		I_{AR}	20	A
Repetitive avalanche energy 0.1mH [C]		E_{AR}	20	mJ
Power Dissipation [B]	T_C=25°C	P_D	30	W
	T_C=100°C		15	
Power Dissipation [A]	T_A=25°C	P_{DSM}	2.5	W
	T_A=70°C		1.6	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 175	°C

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	15	20	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		41	50	°C/W
Maximum Junction-to-Case [B]	Steady-State	$R_{\theta JC}$	3.6	5	°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250uA, V_{GS}=0V	25			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=20V, V_{GS}=0V			1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±20V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250µA	1	1.8	2.5	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	70			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=30A		11.1	14	mΩ
		T_J=125°C		15.5		
		V_{GS}=4.5V, I_D=20A		19	24	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=30A		30		S
V_{SD}	Diode Forward Voltage	I_S=1A, V_{GS}=0V		0.74	1	V
I_S	Maximum Body-Diode Continuous Current				25	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=12.5V, f=1MHz		830	1000	pF
C_{oss}	Output Capacitance			224		pF
C_{rss}	Reverse Transfer Capacitance			127		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		0.93	1.5	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=12.5V, I_D=30A		15.3	19	nC
Q_g(4.5V)	Total Gate Charge			7.4	9	nC
Q_{gs}	Gate Source Charge			2.7		nC
Q_{gd}	Gate Drain Charge			4.3		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=12.5V, R_L=0.42Ω, R_{GEN}=3Ω		8		ns
t_r	Turn-On Rise Time			11.7		ns
$t_{D(off)}$	Turn-Off DelayTime			30		ns
t_f	Turn-Off Fall Time			11		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=30A, dI/dt=100A/µs		23.5	30	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=30A, dI/dt=100A/µs		12.8		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in ^{2} FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The Power dissipation P_{DSM} is based on $R_{\theta JA}$ and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design, and the maximum temperature of 175°C may be used if the PCB allows it.

B. The power dissipation P_D is based on $T_{J(MAX)}$=175°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C: Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=175°C.

D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to case $R_{\theta JC}$ and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300 µs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedence which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$=175°C.

G. The maximum current rating is limited by bond-wires.

H. These tests are performed with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

Rev 0 : Septemeber 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

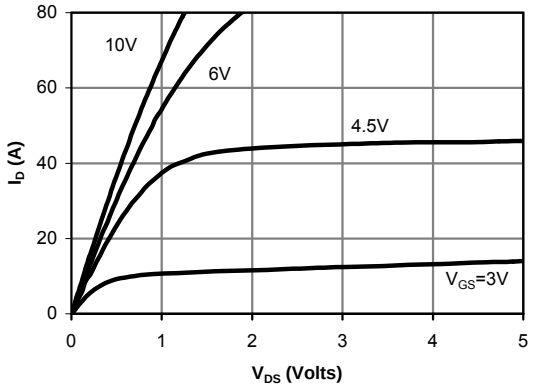


Fig 1: On-Region Characteristics

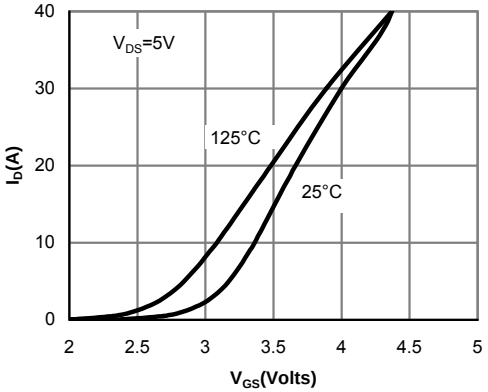


Figure 2: Transfer Characteristics

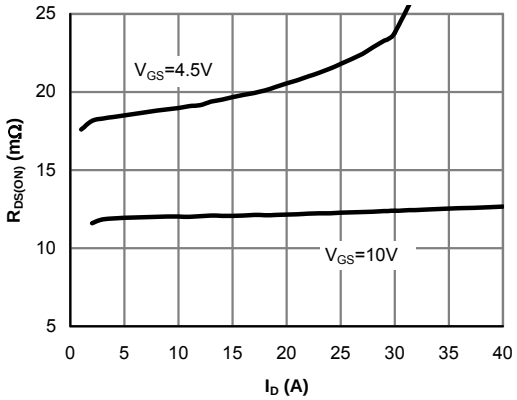


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

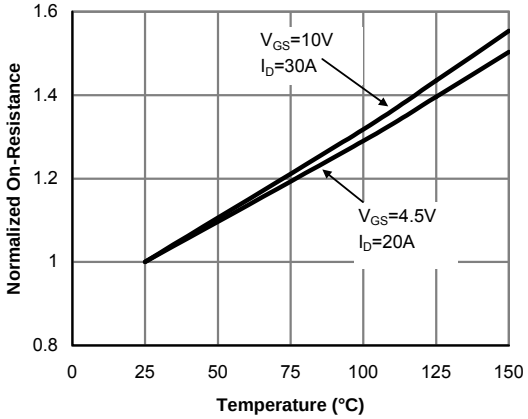


Figure 4: On-Resistance vs. Junction Temperature

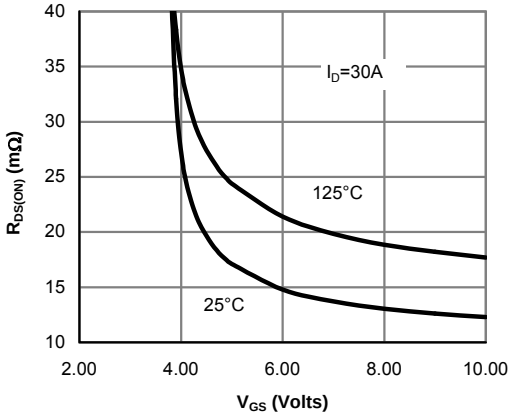


Figure 5: On-Resistance vs. Gate-Source Voltage

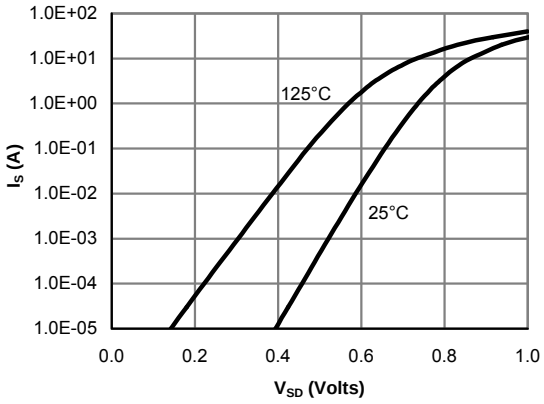


Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

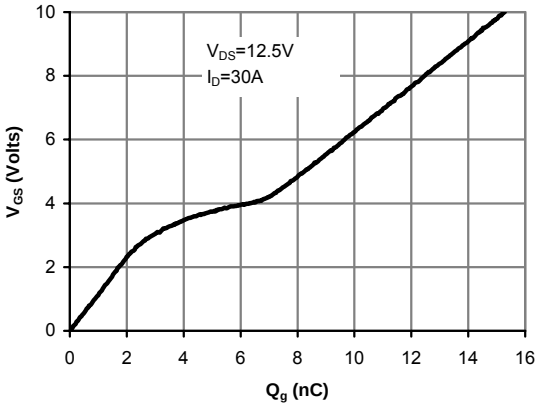


Figure 7: Gate-Charge Characteristics

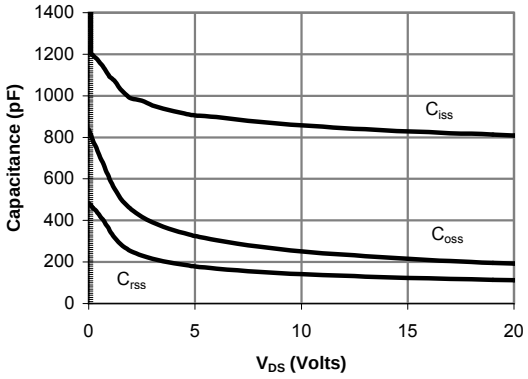


Figure 8: Capacitance Characteristics

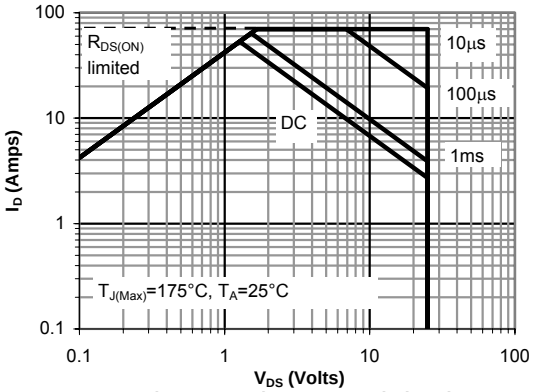


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

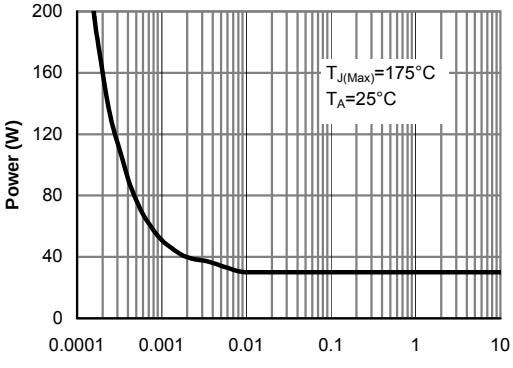


Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)

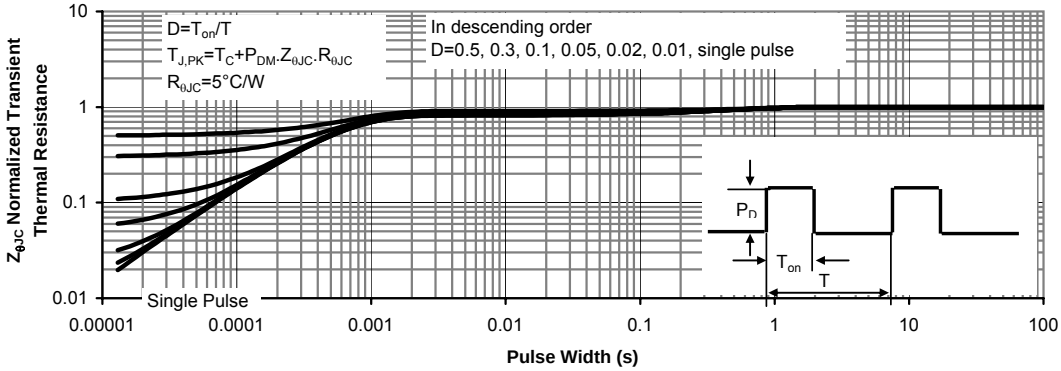


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

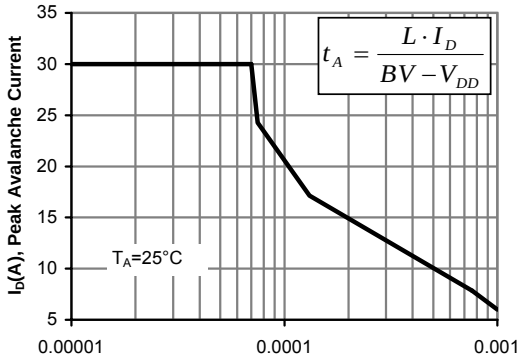


Figure 12: Single Pulse Avalanche capability

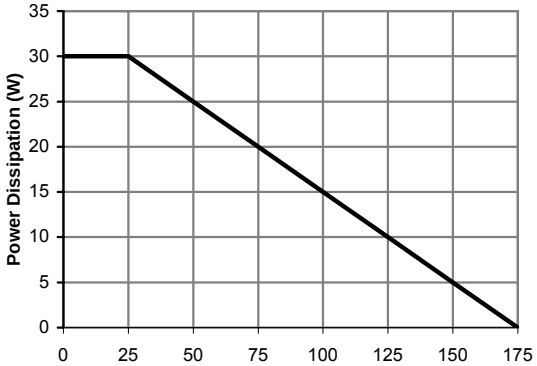


Figure 13: Power De-rating (Note B)

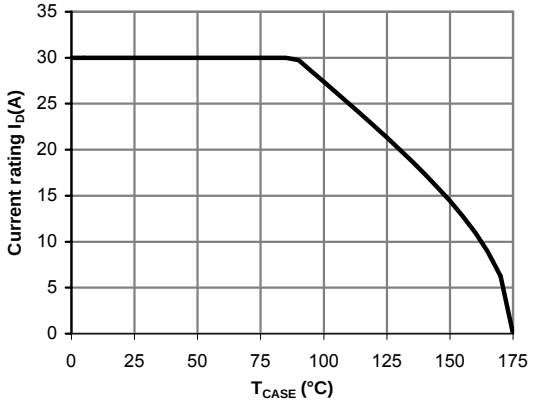


Figure 14: Current De-rating (Note B)

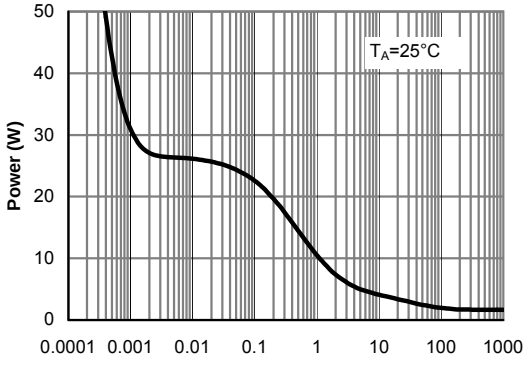


Figure 15: Single Pulse Power Rating Junction-to-Ambient (Note H)

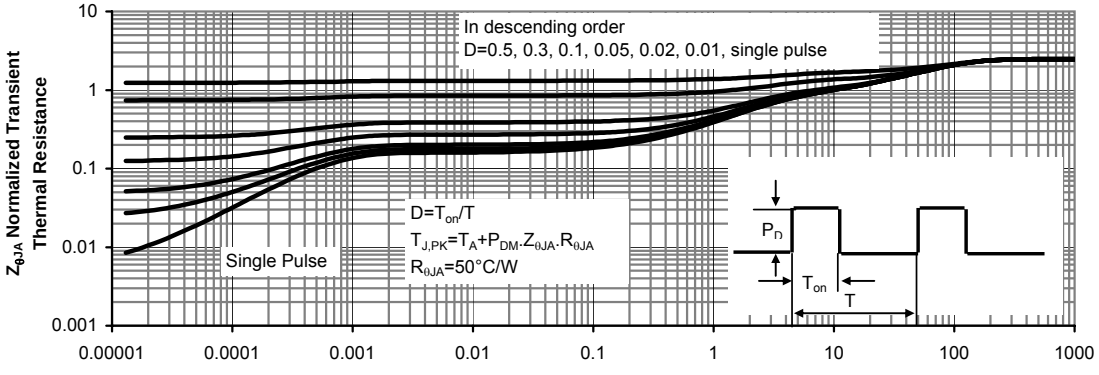


Figure 16: Normalized Maximum Transient Thermal Impedance (Note H)