



Data Sheet




Product Category: IF SAW Filter

Part Number: 838-IF70.0M-LA Package: 38.0 x 25.0 Thru Hole Application: Base Station & Repeater Last Modified: May 24 2003

TYPE :
70.0 MHz Bandpass Filter
18.95 MHz Bandwidth

PART NUMBER :
838-IF70.0M-LA

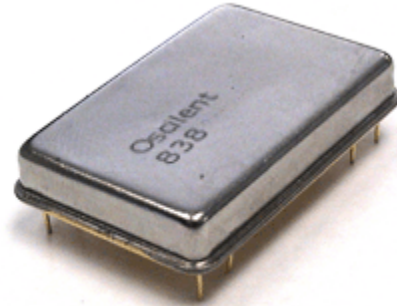

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS


PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency	69.94	70.00	70.06	MHz
Insertion Loss	-	25.5	27.0	dB
1dB Bandwidth	18.75	18.85	-	MHz
3dB Bandwidth	18.95	19.05	-	MHz
40dB Bandwidth	-	20.00	20.10	MHz
50dB Bandwidth	-	20.10	20.20	MHz
Passband Ripple	-	0.70	1.0	dB
Group Delay Variation	-	55	100	nsec
Absolute Delay	-	3.22	-	µsec
Ultimate Rejection	50	55	-	dB
Substrate Material	-	128° LN	-	-
Ambient Temperature	-	25	-	°C

* Custom SAW IF Filters available. Contact Oscilent for assistance.

PACKAGE OUTLINE (mm)

TEST FIXTURE

Contact Oscilent for Test Fixture Details

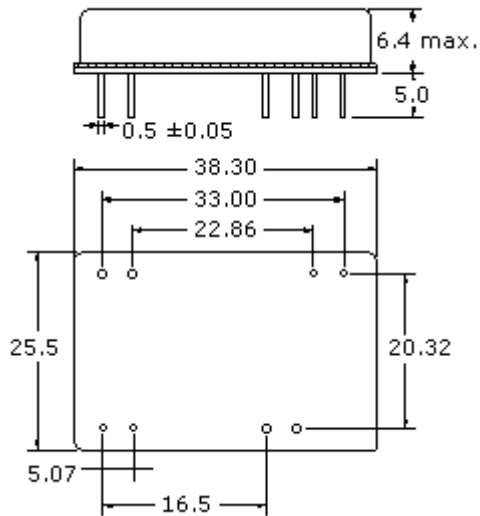

Oscilent Corporation - CALL **949.252.0522**

Part No.: 838-IF70.0M-LA

17962 Sky Park Circle, Building D, Irvine, CA 92614, USA
Fax: 949.252.0599, E-Mail: Sales@Oscilent.com

Crystal Oscillators | Quartz Crystal | TCXO | VCXO | IF SAW Filter | RF SAW Filter | Ceramic Resonator
Crystal Filter | Ceramic Filter | SAW Filter / SAW Devices | Site Map