ALPHA & OMEGA SEMICONDUCTOR

AO4922

Asymmetric Dual N-Channel MOSFET

SRFET™

General Description

The AO4922 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. The two MOSFETs make a compact and efficient switch and synchronous rectifier combination for use in DC-DC converters. A monolithically integrated Schottky diode in parallel with the synchronous MOSFET to boost efficiency further.

Product Summary


FET1	FET2	
V_{DS} (V) = 30V	V_{DS}(V) = 30V	
I_D = 9A	I_D=7.3A	(V_{GS} = 10V)
$R_{DS(ON)}$ < 15.8mΩ	<24mΩ	(V_{GS} = 10V)
$R_{DS(ON)}$ < 18.5mΩ	<29mΩ	(V_{GS} = 4.5V)

100% UIS Tested
100% Rg Tested


Green Product

SOIC-8


Top View




Bottom View



Top View



SRFET™
Soft **R**ecovery MOS**FET**: Integrated Schottky Diode



Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Max FET1	Max FET2	Units
Drain-Source Voltage		V_{DS}	30	30	V
Gate-Source Voltage		V_{GS}	±12	±12	V
Continuous Drain Current [A]	T_A=25°C	I_{DSM}	9.0	7.3	A
	T_A=70°C		7.2	5.9	
Pulsed Drain Current [B]		I_{DM}	40	40	
Avalanche Current [B]		I_{AR}	22	12	A
Repetitive avalanche energy L=0.3mH [B]		E_{AR}	73	22	mJ
Power Dissipation[A]	T_A=25°C	P_{DSM}	2.0	2.0	W
	T_A=70°C		1.3	1.3	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	-55 to 150	°C

Thermal Characteristics FET1

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	48	62.5	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		74	90	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	32	40	°C/W

Thermal Characteristics FET2

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	48	62.5	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		74	90	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	32	40	°C/W

FET1 Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250uA, V_{GS}=0V	30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=24V, V_{GS}=0V		0.01	0.1	mA
		T_J=125°C		6	20	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±12V			0.1	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA	1.5	1.8	2.4	V
$I_{D(ON)}$	On state drain current	V_{GS}=4.5V, V_{DS}=5V	40			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=9A		13	15.8	mΩ
		T_J=125°C		20.2	25.2	
		V_{GS}=4.5V, I_D=7A		15	18.5	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=9A		78		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.38	0.5	V
I_S	Maximum Body-Diode + Schottky Continuous Current				4	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz		1980	2574	pF
C_{oss}	Output Capacitance			317		pF
C_{rss}	Reverse Transfer Capacitance			111		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		1.3	2.0	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=15V, I_D=9A		33.0	43	
Q_g(4.5V)	Total Gate Charge			15.0		nC
Q_{gs}	Gate Source Charge			5.3		nC
Q_{gd}	Gate Drain Charge			6.0		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=1.7Ω, R_{GEN}=3Ω		5.5		ns
t_r	Turn-On Rise Time			5.5		ns
$t_{D(off)}$	Turn-Off DelayTime			27.0		ns
t_f	Turn-Off Fall Time			4.3		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=9A, dI/dt=300A/µs		11	13	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=9A, dI/dt=300A/µs		7		nC

A: The value of $R_{\theta JA}$ is measured with the device in a still air environment with T_A =25°C. The power dissipation P_{DSM} and current rating I_{DSM} are based on $T_{J(MAX)}$=150°C, using t ≤ 10s junction-to-ambient thermal resistance.

B: Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150°C.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using <300 µs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

Rev1: May 2011

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

FET1 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

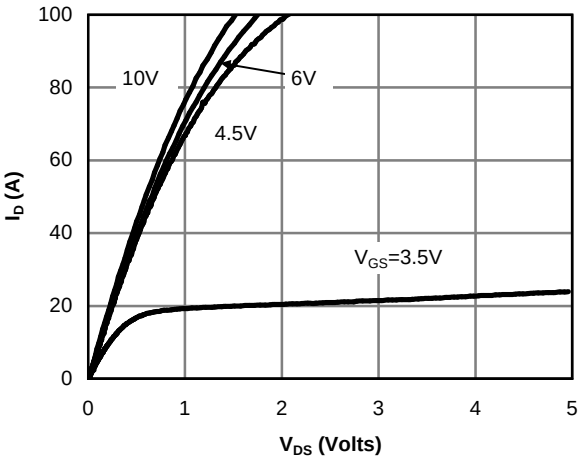


Figure 1: On-Region Characteristics

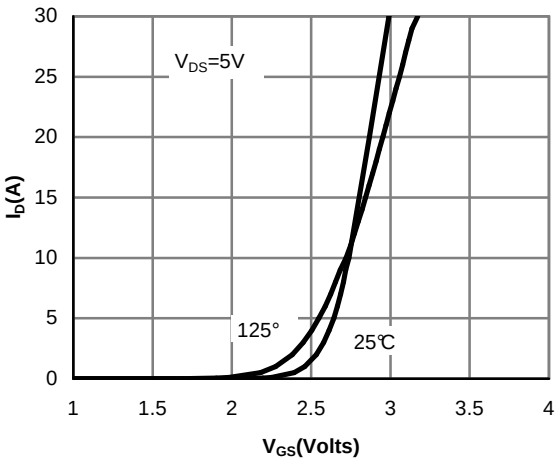


Figure 2: Transfer Characteristics

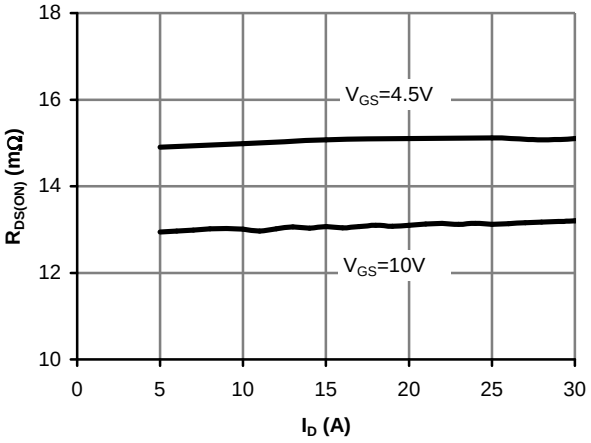


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

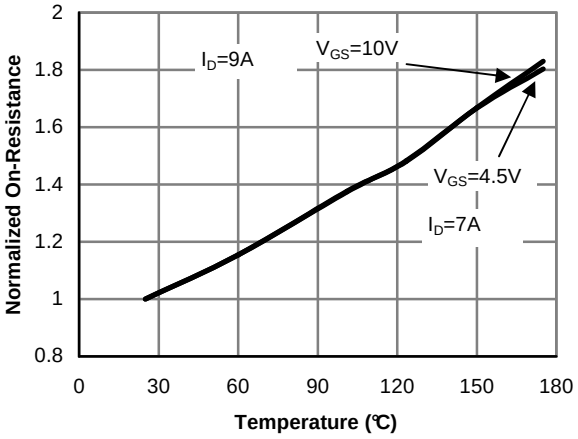


Figure 4: On-Resistance vs. Junction Temperature

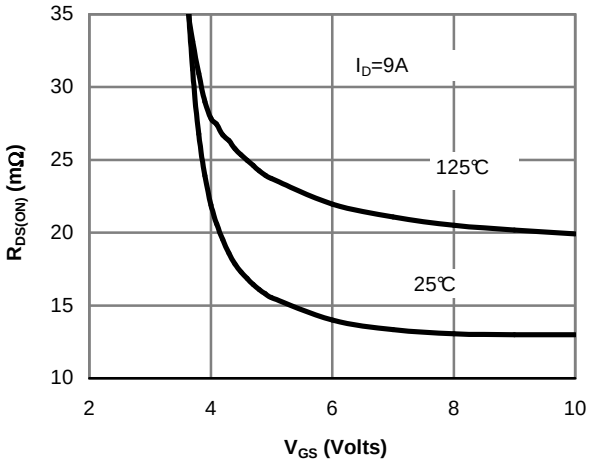


Figure 5: On-Resistance vs. Gate-Source Voltage

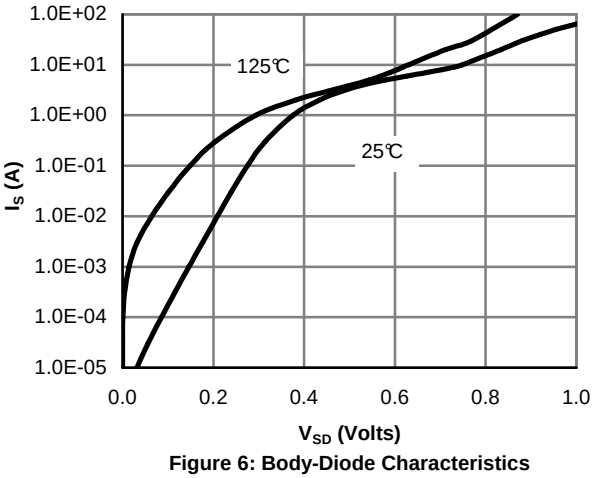


Figure 6: Body-Diode Characteristics

FET1 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

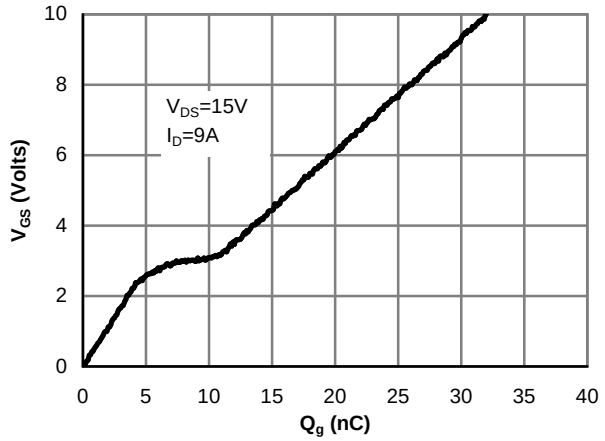


Figure 7: Gate-Charge Characteristics

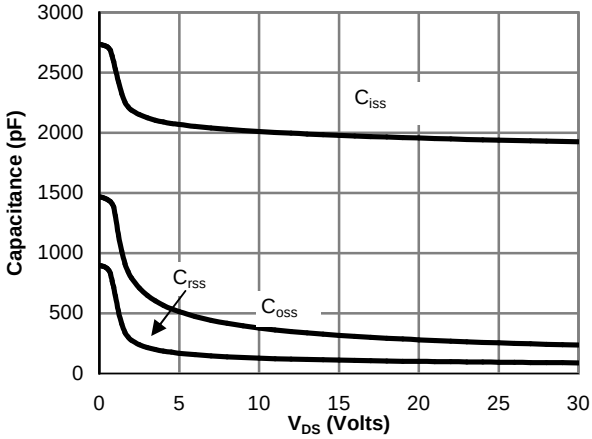


Figure 8: Capacitance Characteristics

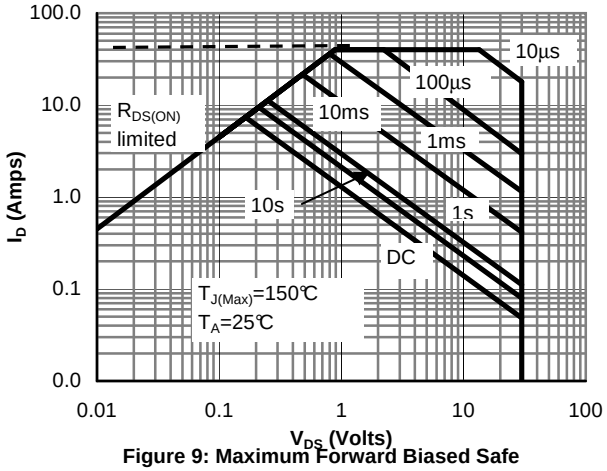


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

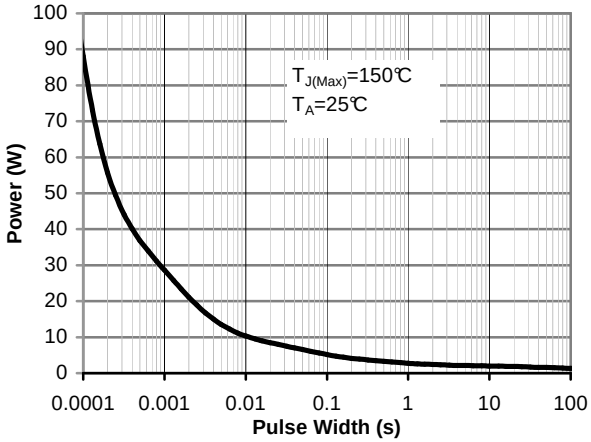


Figure10: Single Pulse Power Rating Junction-to-Ambient (Note E)

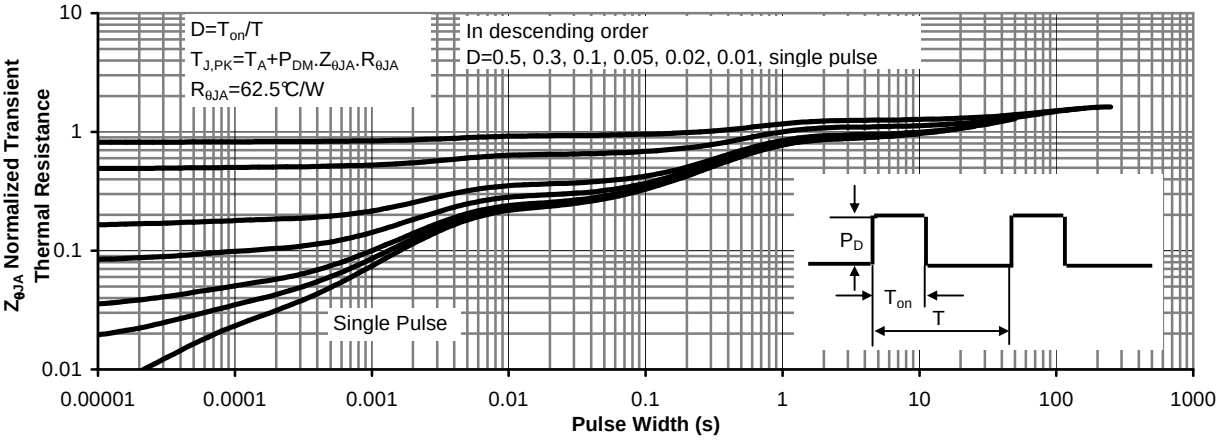


Figure 11: Normalized Maximum Transient Thermal Impedance (Note E)

FET1 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

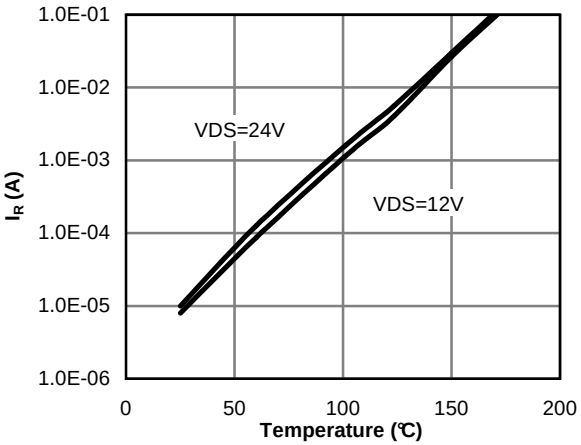


Figure 12: Diode Reverse Leakage Current vs. Junction Temperature

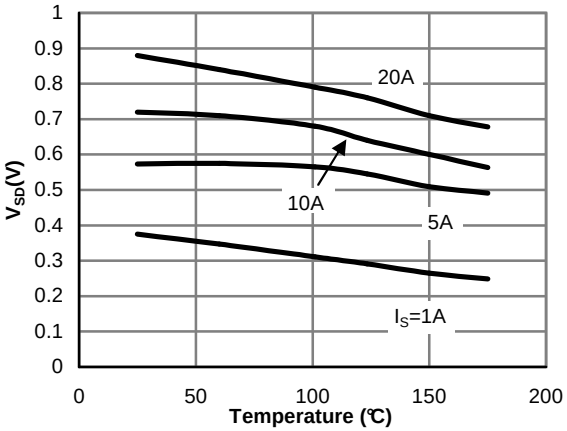


Figure 13: Diode Forward voltage vs. Junction Temperature

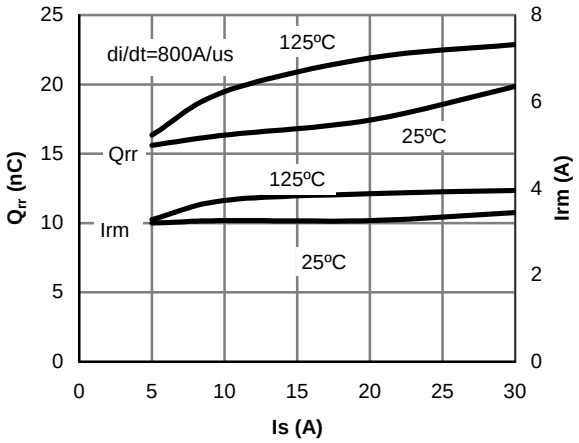


Figure 14: Diode Reverse Recovery Charge and Peak Current vs. Conduction Current

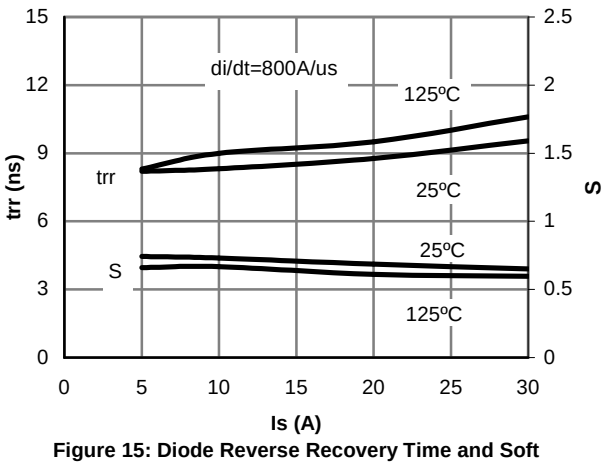


Figure 15: Diode Reverse Recovery Time and Soft Coefficient vs. Conduction Current

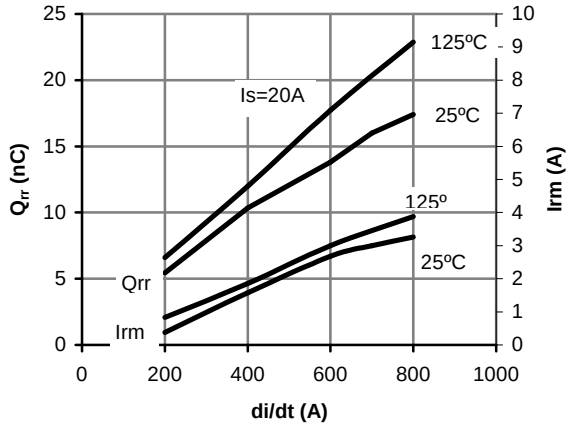


Figure 16: Diode Reverse Recovery Charge and Peak Current vs. di/dt

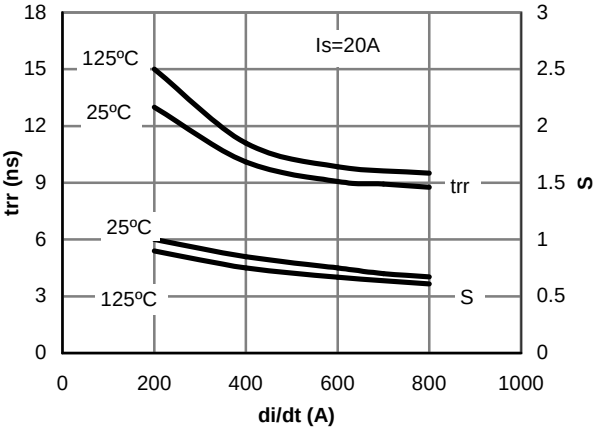


Figure 17: Diode Reverse Recovery Time and Soft Coefficient vs. di/dt

FET2 Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V	30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=24V, V_{GS}=0V		0.002	1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±12V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA	0.7	1	1.5	V
$I_{D(ON)}$	On state drain current	V_{GS}=4.5V, V_{DS}=5V	40			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=7.3A		20	24	mΩ
		T_J=125°C		28	35	
		V_{GS}=4.5V, I_D=6A		23.5	29	mΩ
		V_{GS}=2.5V, I_D=5A		34.7	48	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=7.3A		26		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.71	1	V
I_S	Maximum Body-Diode Continuous Current				2.8	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz		900	1100	pF
C_{oss}	Output Capacitance			88		pF
C_{rss}	Reverse Transfer Capacitance			65		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		0.95	1.5	Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	V_{GS}=4.5V, V_{DS}=15V, I_D=7.3A		10	12	nC
Q_{gs}	Gate Source Charge			1.8		nC
Q_{gd}	Gate Drain Charge			3.75		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=2Ω, R_{GEN}=6Ω		3.2		ns
t_r	Turn-On Rise Time			3.5		ns
$t_{D(off)}$	Turn-Off DelayTime			21.5		ns
t_f	Turn-Off Fall Time			2.7		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=7.3A, dI/dt=100A/µs		16.8	21	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=7.3A, dI/dt=100A/µs		8		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using <300 µs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

Rev1: May 2011

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

FET2 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

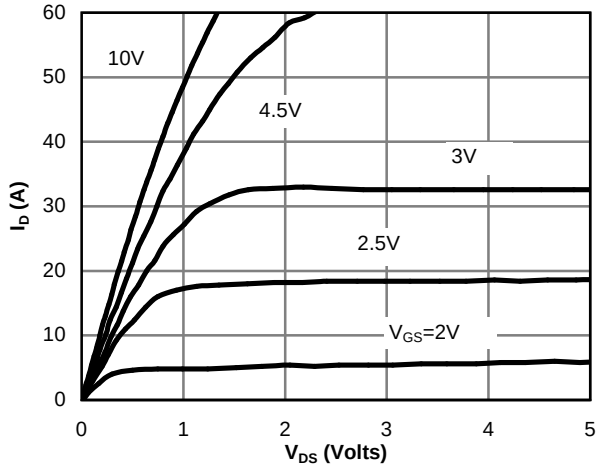


Figure 1: On-Region Characteristics

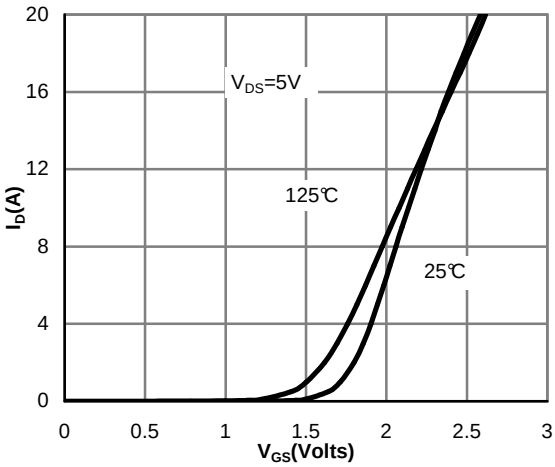


Figure 2: Transfer Characteristics

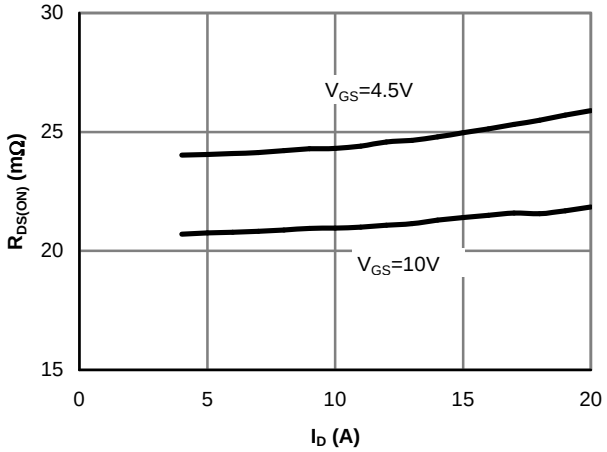


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

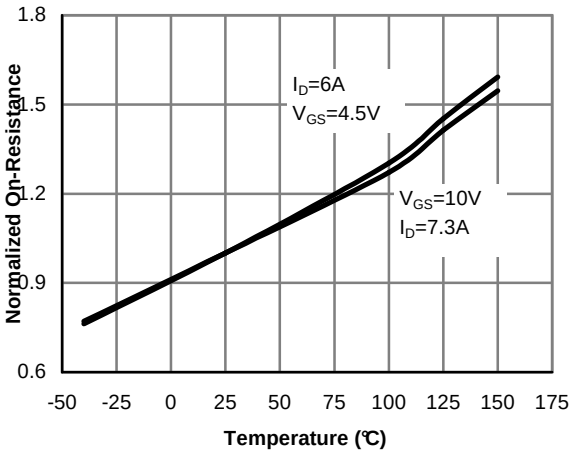


Figure 4: On-Resistance vs. Junction Temperature

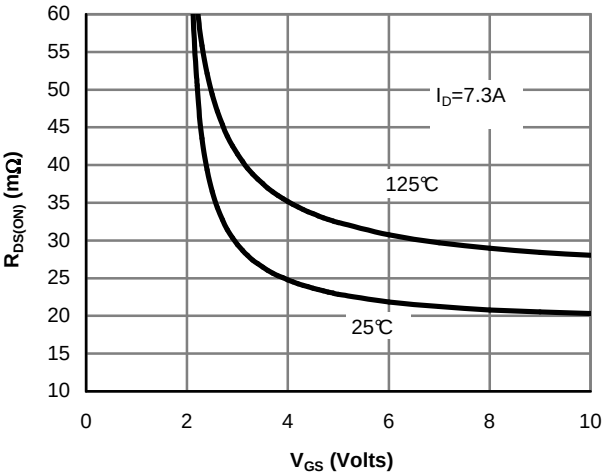


Figure 5: On-Resistance vs. Gate-Source Voltage

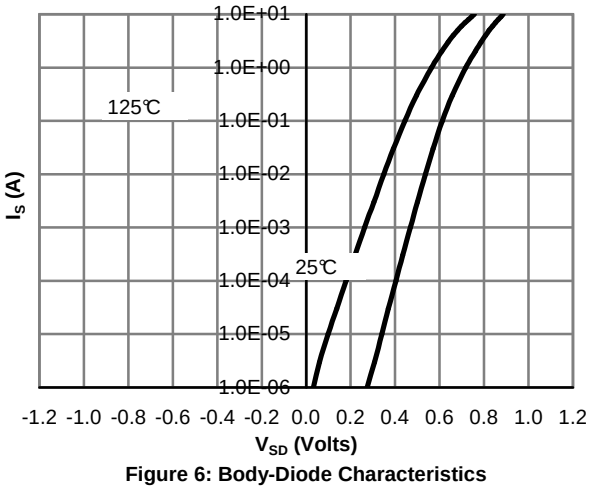


Figure 6: Body-Diode Characteristics

FET2 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

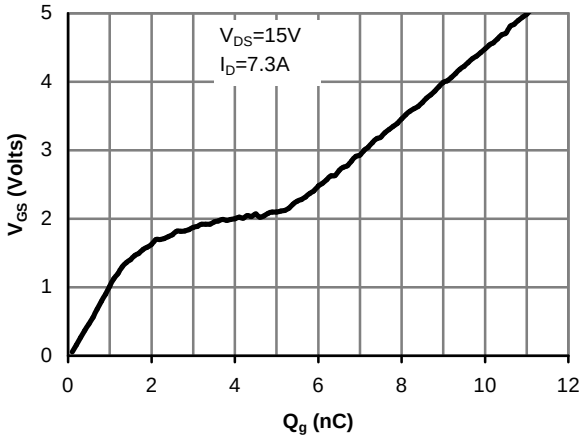


Figure 7: Gate-Charge Characteristics

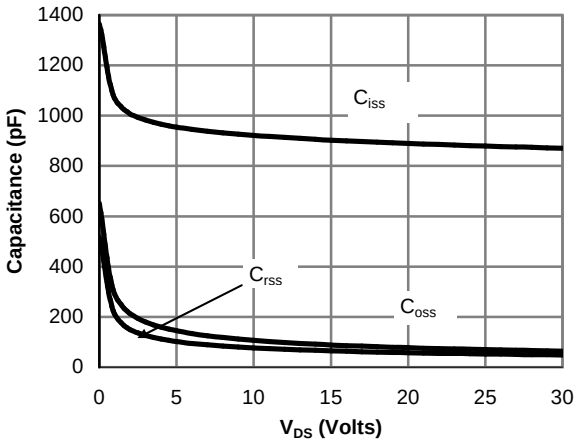


Figure 8: Capacitance Characteristics

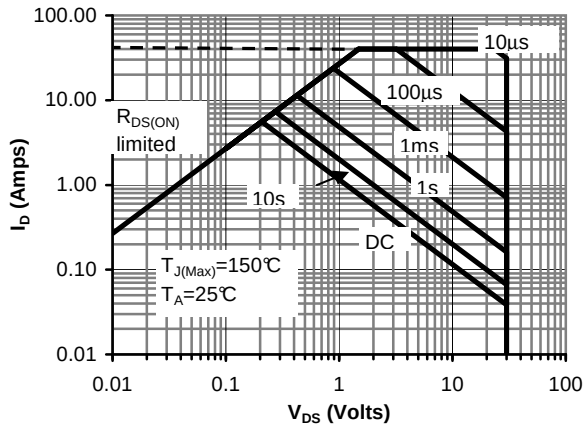


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

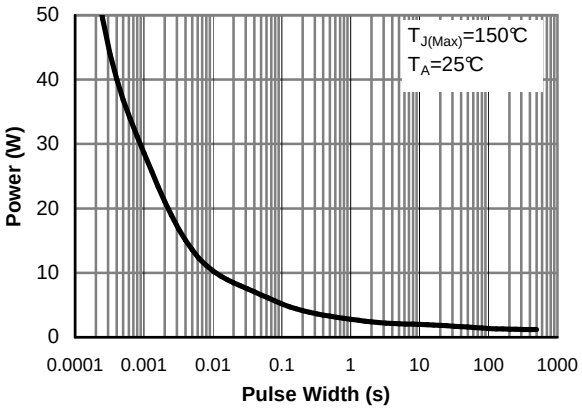


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

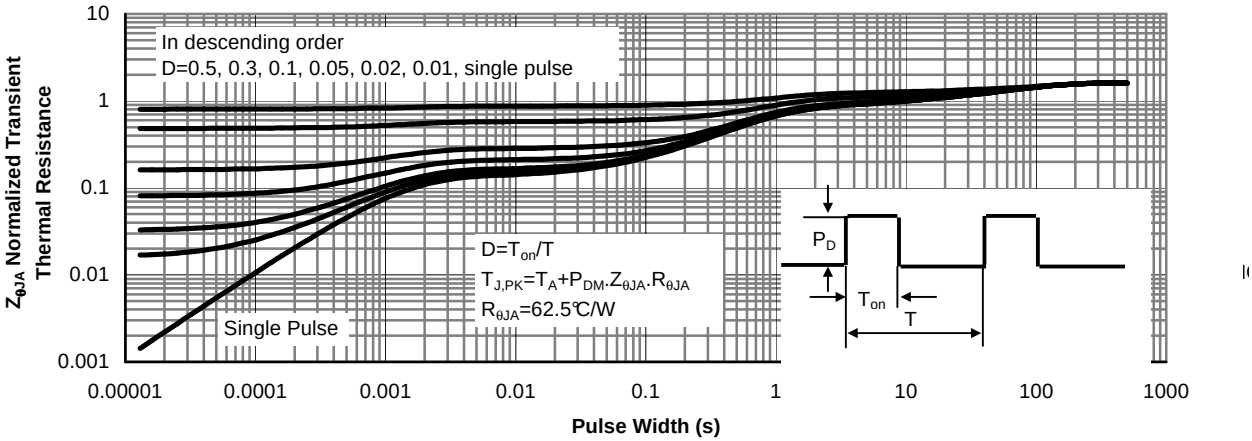


Figure 11: Normalized Maximum Transient Thermal Impedance (Note E)