


FEATURES


Resolution of up to 8,192 angle steps per sine period
 Binary and decimal resolution settings, e.g. 500, 512, 1000, 1024; programmable angle hysteresis
 Count-safe vector follower principle, real-time system with 70 MHz sampling rate
 Conversion time of just 250 ns including amplifier settling
 Direct sensor connection; selectable input gain
 Input frequency of up to 250 kHz
 Signal conditioning for offset, amplitude and phase
 A/B quadrature signals of up to 2 MHz with adjustable minimum transition distance
 Zero signal processing, adjustable in index position and width
 Absolute angle output via fast serial interface (BiSS, SSI)
 Permanent bidirectional memory access to parameters and OEM data by BiSS C
 Period counting with up to 24 bits
 Error monitoring of frequency, amplitude and configuration
 Device setup from serial EEPROM or using BiSS
 ESD protection and TTL-/CMOS-compatible outputs

APPLICATIONS

Interpolator IC for angle resolution from sine/cosine sensor signals
 Optical encoders
 MR sensor systems

PACKAGES

TSSOP20

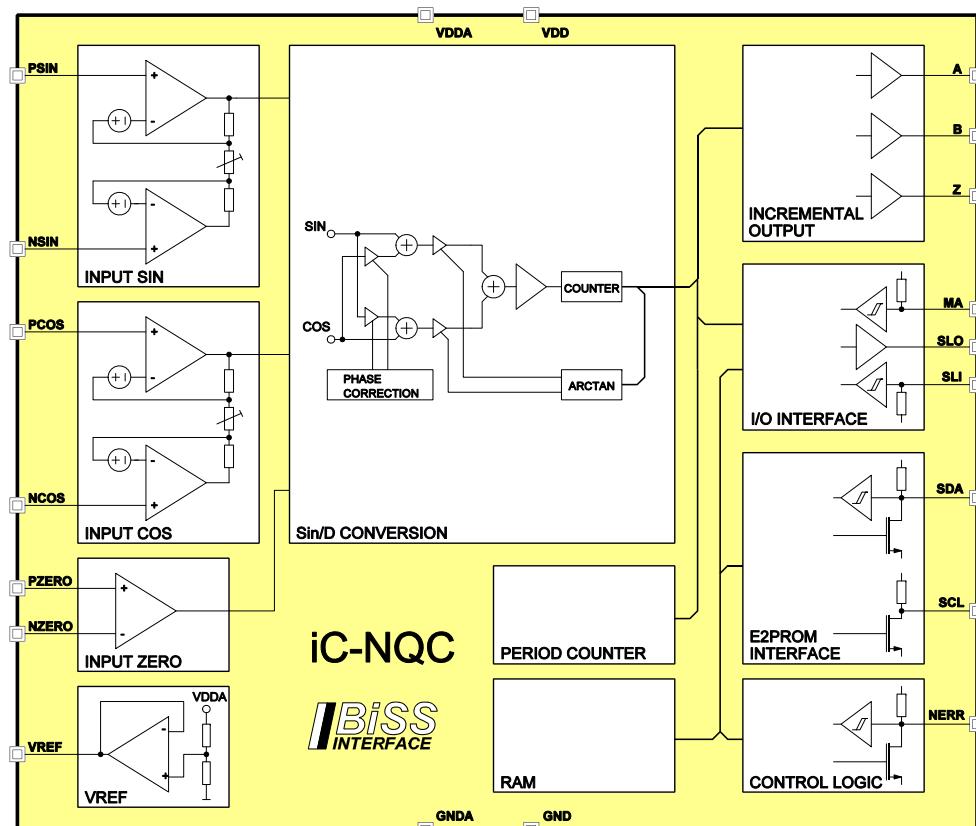BLOCK DIAGRAM

DESCRIPTION

iC-NQC is a monolithic A/D converter which, by applying a count-safe vector follower principle, converts sine/cosine sensor signals with a selectable resolution and hysteresis into angle position data.

This absolute value is output via a bidirectional, synchronous-serial I/O interface in BiSS C protocol and trails a master clock rate of up to 10 Mbit/s. Alternatively, this value can be output so that it is compatible with SSI in Gray or binary code, with or without error bits. The device also supports double transmission in SSI ring mode.

Signal periods are logged quickly by a 24-bit period counter that can supplement the output data with an upstream multturn position value.

At the same time any changes in angle are converted into incremental A QUAD B signals. Here, the minimum transition distance can be stipulated and adapted to suit the system on hand (cable length, external counter). A synchronized zero index Z is generated if enabled by PZERO and NZERO.

The front-end amplifiers are configured as instrumentation amplifiers, permitting sensor bridges to be di-

rectly connected without the need for external resistors. Various programmable D/A converters are available for the conditioning of sine/cosine sensor signals with regard to offset, amplitude ratio and phase errors (offset compensation by 8-bit DAC, gain ratio by 5-bit DAC, phase compensation by 6-bit DAC).

The front-end gain can be set in stages graded to suit all common complementary sensor signals from approximately 20 mVpp to 1.5 Vpp and also non-complementary sensor signals from 40 mVpp to 3 Vpp respectively.

The device can be configured using two bidirectional interfaces, the EEPROM interface from a serial EEPROM with I²C interface, or the I/O interface in BiSS C protocol. Free storage space on the EEPROM can be accessed via BiSS for the storage of additional data.


After a low voltage reset, iC-NQC reads in the configuration data including the check sum (CRC) from the EEPROM and repeats the process if a CRC error is detected.

CONTENTS

CONTENTS	3	TEST FUNCTIONS	18
PACKAGES	4	I/O INTERFACE: BiSS C PROTOCOL	19
ABSOLUTE MAXIMUM RATINGS	5	Interface Parameters With BiSS C Protocol	19
THERMAL DATA	5	Example Of BiSS Data Output	20
ELECTRICAL CHARACTERISTICS	6	Register Communication	20
CHARACTERISTICS: Diagrams	8	Internal Reset Function	20
Short BiSS Timeout	8	Short BiSS Timeout	20
OPERATING REQUIREMENTS: I/O Interface	9	I/O INTERFACE: SSI Protocol	22
		Examples Of SSI Data Output	23
PARAMETER and REGISTER	10	EEPROM INTERFACE	24
SIGNAL CONDITIONING	11	Example of CRC Calculation Routine	24
CONVERTER FUNCTIONS	12	STARTUP BEHAVIOR	25
MAXIMUM POSSIBLE CONVERTER			
FREQUENCY	13	APPLICATION NOTES	26
Serial data output	13	Principle input circuits	26
Incremental output to A, B and Z	14	Basic circuit	27
INCREMENTAL SIGNALS	15	EVALUATION BOARD	27
SIGNAL MONITORING and ERROR MESSAGES	17	DESIGN REVIEW: Function Notes	27

PACKAGES TSSOP20 (according to JEDEC Standard)**PIN CONFIGURATION**

TSSOP20 4.4 mm, lead pitch 0.65 mm

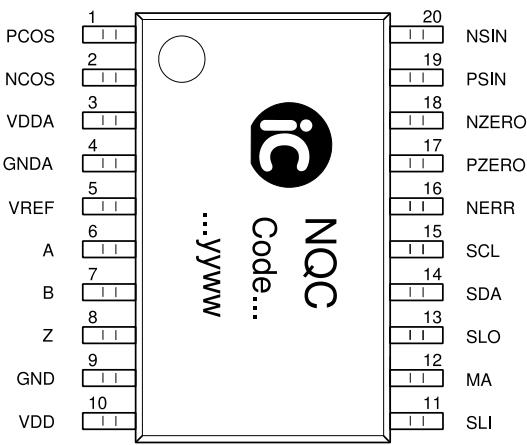**No. Name Function**

1	PCOS	Input Cosine +
2	NCOS	Input Cosine -
3	VDDA	+5 V Supply Voltage (analog)
4	GNDA	Ground (analog)
5	VREF	Reference Voltage Output
6	A	Incremental Output A
7	B	Analog signal COS+ (TMA mode)
8	Z	PWM signal for Offset Sine (calib.)
9	GND	Incremental Output B
10	VDD	Analog signal COS- (TMA mode)
11	SLI	PWM signal for Offset Cosine (calib.)
12	MA	Incremental Output Z
13	SLO	PWM signal for Phase/Ratio (calib.)
14	SDA	Ground
15	SCL	+5 V Supply Voltage (digital)
16	NERR	I/O Interface, data input*
17	PZERO	I/O Interface, clock line
18	NZERO	I/O Interface, data output
19	PSIN	EEPROM interface, data line
20	NSIN	Analog signal SIN+ (TMA mode)
		EEPROM interface, clock line
		Analog signal SIN- (TMA mode)
		Error Input/Output, active low
		Input Zero Signal +
		Input Zero Signal -
		Input Sine +
		Input Sine -

External connections linking VDDA to VDD and GND to GNDA are required.

*) If only a single iC-NQC is used and no chain circuitry of multiple BiSS slaves, pin SLI can remain unwired or can be linked to ground (GND).

ABSOLUTE MAXIMUM RATINGS

These ratings do not imply permissible operating conditions; functional operation is not guaranteed.
Exceeding these ratings may damage the device.

Item No.	Symbol	Parameter	Conditions	Min.	Max.	Unit
G001	VDDA	Voltage at VDDA		-0.3	6	V
G002	VDD	Voltage at VDD		-0.3	6	V
G003	Vpin()	Voltage at PSIN, NSIN, PCOS, NCOS, PZERO, NZERO, VREF, NERR, SCL, SDA, MA, SLI, SLO, A, B, Z	V() < VDDA + 0.3 V V() < VDD + 0.3 V	-0.3	6	V
G004	Imx(VDDA)	Current in VDDA		-50	50	mA
G005	Imx(GNDA)	Current in GNDA		-50	50	mA
G006	Imx(VDD)	Current in VDD		-50	50	mA
G007	Imx(GND)	Current in GND		-50	50	mA
G008	Imx()	Current in PSIN, NSIN, PCOS, NCOS, PZERO, NZERO, VREF, NERR, SCL, SDA, MA, SLI, SLO, A, B, Z		-10	10	mA
G009	Ilu()	Pulse Current in all pins (Latch-up Strength)	according to Jedec Standard No. 78; Ta = 25 °C, pulse duration to 10 ms, VDDA = VDDA _{max} , VDD = VDD _{max} , Vlu() = (-0.5...+1.5) x Vpin() _{max}	-100	100	mA
G010	Vd()	ESD Susceptibility at all pins	HBM 100 pF discharged through 1.5 kΩ		2	kV
G011	Tj	Junction Temperature		-40	150	°C
G012	Ts	Storage Temperature Range		-40	150	°C

THERMAL DATA

Operating Conditions: VDDA = VDD = 5 V ±10 %

Item No.	Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
T01	Ta	Operating Ambient Temperature Range (extended temperature range of -40 to 125 °C available on request)		-25		85	°C

All voltages are referenced to ground unless otherwise stated.

All currents flowing into the device pins are positive; all currents flowing out of the device pins are negative.

ELECTRICAL CHARACTERISTICSOperating Conditions: VDDA = VDD = 5 V ±10 %, T_j = -40 ... 125 °C, unless otherwise stated.

Item No.	Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Total Device							
Functionality and parameters beyond the operating conditions (with reference to independent voltage supplies, for instance) are to be verified within the individual application using FMEA methods.							
001	VDDA, VDD	Permissible Supply Voltage		4.5		5.5	V
002	I(VDDA)	Supply Current in VDDA	fin() = 200 kHz; A, B, Z open			15	mA
003	I(VDD)	Supply Current in VDD	fin() = 200 kHz; A, B, Z open			20	mA
004	V _{on}	Turn-on Threshold VDDA, VDD		3.2		4.4	V
005	V _{hys}	Turn-on Threshold Hysteresis		200			mV
006	V _{c()} hi	Clamp Voltage hi at PSIN, NSIN, PCOS, NCOS, PZERO, NZERO, VREF	V _{c()} hi = V() - VDDA; I() = 1 mA, other pins open	0.3		1.6	V
007	V _{c()} lo	Clamp Voltage lo at PSIN, NSIN, PCOS, NCOS, PZERO, NZERO, VREF, NERR, SCL, SDA, MA, SLI, SLO, A, B, Z	I() = -1 mA, other pins open	-1.6		-0.3	V
008	V _{c()} hi	Clamp Voltage hi at NERR, SCL, SDA, MA, SLI, SLO, A, B, Z	V _{c()} hi = V() - VDD; I() = 1 mA, other pins open	0.3		1.6	V
Input Amplifiers and Signal Inputs PSIN, NSIN, PCOS, NCOS							
101	V _{os()}	Input Offset Voltage	V _{in()} and G() in accordance with table GAIN; G ≥ 20 G < 20	-10 -15		10 15	mV mV
102	T _{Cos}	Input Offset Voltage Temperature Drift	see 101		±10		µV/K
103	I _{in()}	Input Current	V() = 0 V ... VDDA	-50		50	nA
104	G _A	Gain Accuracy	G() in accordance with table GAIN	95		102	%
105	G _{Arel}	Gain SIN/COS Ratio Accuracy	G() in accordance with table GAIN	97		103	%
106	f _{hc}	Cut-off Frequency	G = 80 G = 2.667	230 650			kHz kHz
107	S _R	Slew Rate	G = 80 G = 2.667	4 9			V/µs V/µs
Sine-To-Digital Conversion							
201	A _{Aabs}	Absolute Angle Accuracy without calibration	referred to 360° input signal, G = 2.667, V _{in} = 1.5 Vpp, HYS = 0	-1.0		1.0	DEG
202	A _{Aabs}	Absolute Angle Accuracy after calibration	referred to 360° input signal, HYS = 0, internal signal amplitude of 2 ... 4 Vpp	-0.5	±0.35	+0.5	DEG
203	A _{Arel}	Relative Angle Accuracy	referred to signal periods at A, resp. B (see Fig. 1); G = 2.667, V _{in} = 1.5 Vpp, SELRES = 1024, FCTR = 0x0004 ... 0x00FF, fin < fin _{max} (see table 16)	-10		10	%
Reference Voltage Output VREF							
801	V _{REF}	Reference Voltage	I(VREF) = -1 mA ... +1 mA	48		52	% VDDA
Oscillator							
A01	f _{osc()} max	Permissible Max. Oscillator Frequency	presented at pin SCL with subdivision of 2048;			90	MHz
A02	f _{osc()}	Oscillator Frequency	presented at pin SCL with subdivision of 2048; VDDA = VDD = 5 V ±10 %, CFGOSC = 0x00 VDDA = VDD = 5 V, CFGOSC = 0x00 VDDA = VDD = 5 V, CFGOSC = 0x03 VDDA = VDD = 5 V, CFGOSC = 0x05	52 60	72 54 84	90 83	MHz MHz MHz MHz
A03	T _{Cosc}	Oscillator Frequency Temperature Drift	VDDA = VDD = 5 V		-0.1		%/K

ELECTRICAL CHARACTERISTICSOperating Conditions: VDDA = VDD = 5 V ±10 %, T_j = -40 ... 125 °C, unless otherwise stated.

Item No.	Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
A04	V _{Cosc}	Oscillator Frequency Power Supply Dependance	CFGOSC = 0x00		+9		%/V
Zero Signal Enable Inputs PZERO, NZERO							
B01	V _{os()}	Input Offset Voltage	V() = V _{cm()}	-20		20	mV
B02	I _{in()}	Input Current	V() = 0 V ... VDDA	-50		50	nA
B03	V _{cm()}	Common-Mode Input Voltage Range		1.4		VDDA-1.5	V
B04	V _{dm()}	Differential Input Voltage Range		0		VDDA	V
Incremental Outputs A, B, Z and I/O Interface Output SLO							
D01	V _{s()hi}	Saturation Voltage hi	V _{s()hi} = VDD - V(); I() = -4 mA			0.4	V
D02	V _{s()lo}	Saturation Voltage lo	I() = 4 mA			0.4	V
D03	t _{r()}	Rise Time	CL() = 50 pF			60	ns
D04	t _{f()}	Fall Time	CL() = 50 pF			60	ns
D05	R _{L()}	Permissible Load at A, B	TMA = 1 (calibration mode)	1			MΩ
I/O Interface Inputs MA, SLI							
E01	V _{t()hi}	Threshold Voltage hi				2	V
E02	V _{t()lo}	Threshold Voltage lo		0.8			V
E03	V _{t()hys}	Hysteresis	V _{t()hys} = V _{t()hi} - V _{t()lo}	300			mV
E04	I _p (MA)	Pull-up Current in MA	V() = 0 ... VDD - 1 V	-240	-120	-25	µA
E05	I _{pd} (SLI)	Pull-down Current in SLI	V() = 1 ... VDD	20	120	300	µA
E06	f _{clk} (MA)	Permissible MA Clock Frequency	SSI protocol BiSS protocol			4 10	MHz MHz
E07	t _p (MA-SLO)	Propagation Delay: MA edge vs. SLO output	R _{L(SLO)} ≥ 1 kΩ	10		50	ns
E08	t _{busy_s}	Processing Time Single-Cycle Data (delay of start bit)			0		µs
E09	t _{busy_r}	Processing Time Register Access (delay of start bit)	with read access to EEPROM			2	ms
E10	t _{idle}	Interface Blocking Time	powering up with no EEPROM		1	1.5	ms
E11	t _{_tos}	Timeout	CFGOSC = 0x00, TIMO = 0, TOA = 0		20		µs
EEPROM Interface Inputs SDA and Error Input NERR							
F01	V _{t()hi}	Threshold Voltage hi				2	V
F02	V _{t()lo}	Threshold Voltage lo		0.8			V
F03	V _{t()hys}	Hysteresis	V _{t()hys} = V _{t()hi} - V _{t()lo}	300			mV
F04	t _{busy()cfg}	Duration of Startup Configuration	error free EEPROM access		5	7	ms
F05	V _{t()hi}	Threshold Voltage hi				2	V
EEPROM Interface Outputs SDA, SCL and Error Output NERR							
G01	f()	Write/Read Clock at SCL			20	100	kHz
G02	V _{s()lo}	Saturation Voltage lo	I() = 4 mA			0.45	V
G03	I _p ()	Pull-up Current	V() = 0 ... VDD - 1 V	-600	-300	-75	µA
G04	t _{f()}	Fall Time	CL() = 50 pF			60	ns
G05	t _{min()lo}	Min. Duration Of Error Indication at NERR (lo signal)	MA = hi, no BiSS access, amplitude or frequency error	10			ms
G06	T _{pw} ()	Cycle Duration Of Error Indication at NERR	fosc() subdivided 2 ²²		60.7		ms
G07	t _{()lo}	Duty Cycle Of Error Indication at NERR	signal duration low to high; AERR = 0 (amplitude error) FERR = 0 (frequency error)		75 50		% %
G08	R _{L()}	Permissible Load at SDA, SCL	TMA = 1 (calibration mode)	1			MΩ

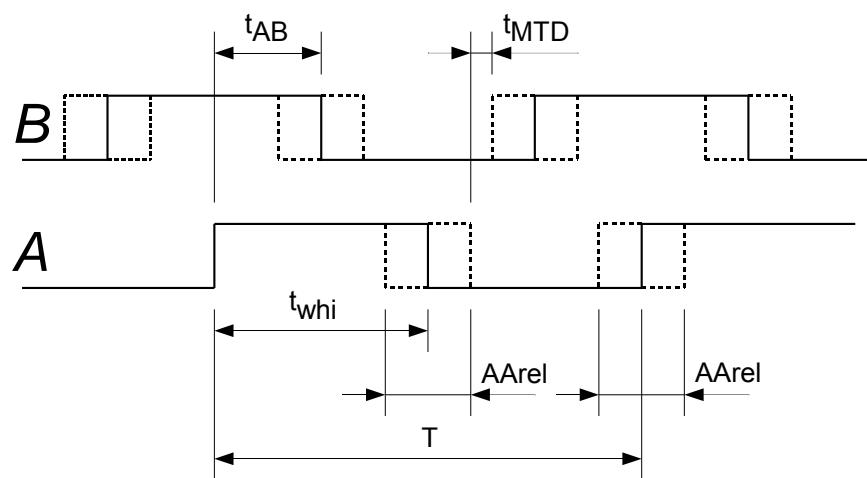
CHARACTERISTICS: Diagrams

Figure 1: Definition of relative angle error and minimum transition distance

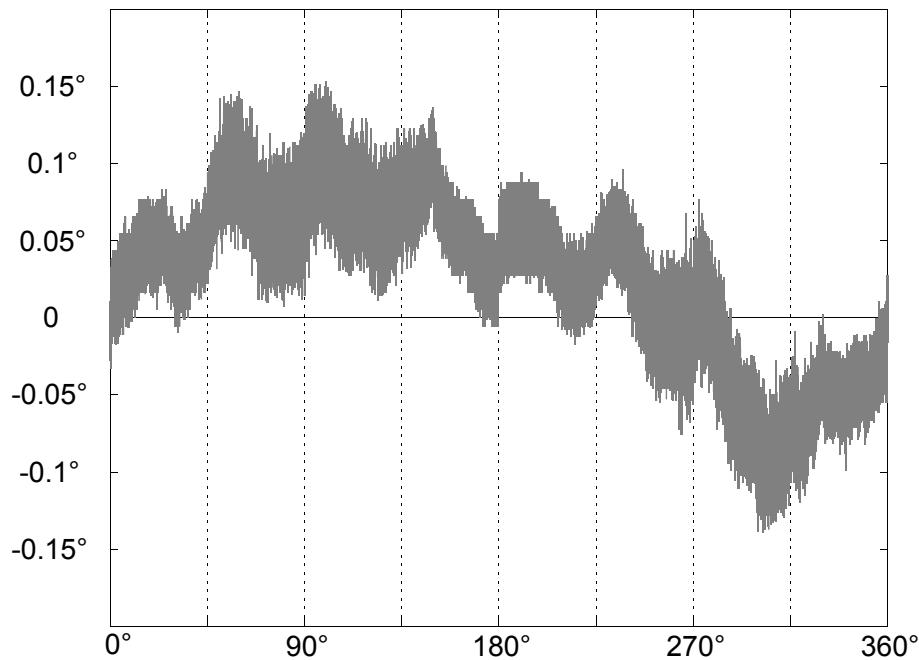


Figure 2: Typical residual absolute angle error after calibration.

OPERATING REQUIREMENTS: I/O Interface

Operating Conditions: VDD = 5 V ±10 %, Ta = -25 ... 85 °C; input levels lo = 0 ... 0.45 V, hi = 2.4 V ... VDD

Item No.	Symbol	Parameter	Conditions	Fig.	Min.	Max.	Unit
SSI Protocol							
I001	T_{MAS}	Permissible Clock Period	t_{tos} according to Table 45	4	250	$2x t_{tos}$	ns
I002	t_{MASH}	Clock Signal Hi Level Duration		4	25	t_{tos}	ns
I003	t_{MASI}	Clock Signal Lo Level Duration		4	25	t_{tos}	ns
BiSS C Protocol							
I004	T_{MAS}	Permissible Clock Period	t_{tos} according to Table 35	5	100	$2x t_{tos}$	ns
I005	t_{MASH}	Clock Signal Hi Level Duration		5	25	t_{tos}	ns
I006	t_{MASI}	Clock Signal Lo Level Duration		5	25	t_{tos}	ns

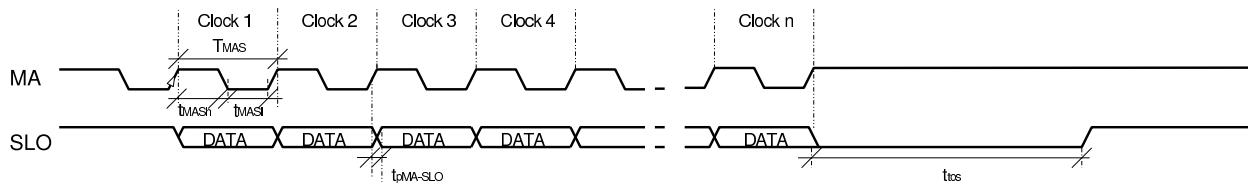


Figure 3: Timing diagram in SSI protocol.

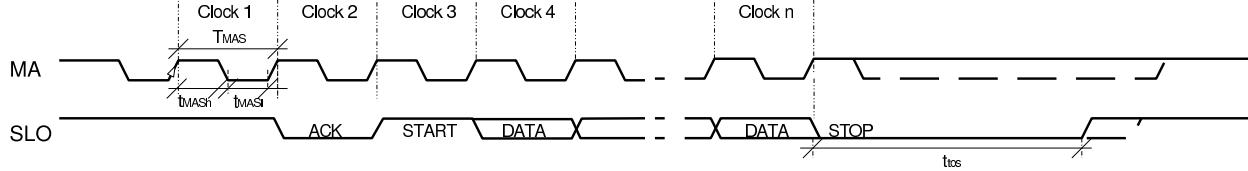


Figure 4: Timing diagram in BiSS C protocol.

PARAMETER and REGISTER

Register Description, Overview	Page 10	Signal Monitoring and Error Messages	Page 17
Signal Conditioning	Page 11	SELAMPL: Amplitude Monitoring, function	
GAIN:	Gain Select	AMPL: Amplitude Monitoring, thresholds	
SINOFFS:	Offset Calibration Sine	AERR: Amplitude Error	
COSOFFS:	Offset Calibration Cosine	FERR: Frequency Error	
REFOFFS:	Offset Calibration Reference		
RATIO:	Amplitude Calibration		
PHASE:	Phase Calibration		
Converter Function	Page 12	Test Functions	Page 18
SELRES:	Resolution	TMODE: Test Mode	
HYS:	Hysteresis	TMA: Analog Test Mode	
CFGOSC:	Oscillator Calibration	BiSS Interface	Page 19
FCTR:	Max. Permissible Converter Frequency	SELSSI: Protocol Version	
Incremental Signals	Page 15	TIMO, TOA: Timeout	
CFGABZ:	Output A, B, Z	TOS: Timeout Short	
ROT:	Direction of Rotation	M2S: Data Output and Options	
CBZ:	24-bit Period Counter Configuration	CRC6: CRC Polynomial	
ENRESDEL:	Output Delay A, B, Z	NZB: Zero Bit	
ZPOS:	Zero Signal Position	ENCDS: Protocol Options	
CFGZ:	Zero Signal Length	RPL: Register Protection Settings	
CFGAB:	Zero Signal Logic	GRAY: SSI Data Format	

OVERVIEW																		
Adr	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0										
0x00	ENCDS	M2S(1:0)			SELRES(4:0)													
0x01	HYS(2:0)				ZPOS(4:0)													
0x02	ENRESDEL	SELSSI	ROT	CBZ	CFGABZ(1:0)		CFGZ(1:0)											
0x03	CRC6	NZB	CFGAB(1:0)		RPL	0	AERR	FERR										
0x04	FCTR(7:0)																	
0x05	GRAY	FCTR(14:8)																
0x06			TIMO		TMODE(2:0)			TMA										
0x07					TOA	CFGOSC(2:0)												
0x08	GAIN(3:0)				RATIO(3:0)													
0x09	SINOFFS(7:0)																	
0x0A	COSOFFS(7:0)																	
0x0B	PHASE(5:0)						REFOFFS	RATIO(4)										
0x0C	reserved	reserved	reserved	reserved	reserved	SELAMPL	AMPL(1:0)											
0x0D																		
0x0E																		
0x0F	CRC_E2P(7:0) - check value read from the EEPROM for addresses 0x00 to 0x0E																	
0x10 - 0x1F	EEPROM 0x00 - 0x0F	Reserved EEPROM memory section: iC-NQC device configuration data.																
0x41 - 0x7F	0x31 - 0x6F	Reserved EEPROM memory section: BiSS C Slave Registers (device identifier 4E 51 43 33 00 00 69 43)																
When no register protection is active, all registers permit read and write access (see RPL).																		
Register contents are random when powering up without an EEPROM.																		

Table 5: Register layout

SIGNAL CONDITIONING

Input stages SIN and COS are configured as instrumentation amplifiers. The amplifier gain must be selected in accordance with the input signal amplitude and programmed to register GAIN according to the fol-

lowing table. Half of the supply voltage is available at VREF as a center voltage to enable the DC level to be adapted.

GAIN	Adr 0x08, Bit 7:4	Sine/Cosine Input Signal Levels Vin()			
		Amplitude		Average value (DC)	
		Differential	Single-ended	Differential	Single-ended
Code	Amplification				
0x0F	80.000	up to 50 mVpp	up to 100 mVpp	0.7 V ... VDDA - 1.2 V	0.8 V ... VDDA - 1.2 V
0x0E	66.667	up to 60 mVpp	up to 120 mVpp	0.7 V ... VDDA - 1.2 V	0.8 V ... VDDA - 1.2 V
0x0D	53.333	up to 75 mVpp	up to 0.15 Vpp	0.7 V ... VDDA - 1.2 V	0.8 V ... VDDA - 1.2 V
0x0C	40.000	up to 0.1 Vpp	up to 0.2 Vpp	1.2 V ... VDDA - 1.2 V	1.3 V ... VDDA - 1.3 V
0x0B	33.333	up to 0.12 Vpp	up to 0.24 Vpp	1.2 V ... VDDA - 1.2 V	1.3 V ... VDDA - 1.3 V
0x0A	28.571	up to 0.14 Vpp	up to 0.28 Vpp	0.7 V ... VDDA - 1.2 V	0.8 V ... VDDA - 1.3 V
0x09	26.667	up to 0.15 Vpp	up to 0.3 Vpp	1.2 V ... VDDA - 1.2 V	1.3 V ... VDDA - 1.3 V
0x08	20.000	up to 0.2 Vpp	up to 0.4 Vpp	0.7 V ... VDDA - 1.2 V	0.8 V ... VDDA - 1.3 V
0x07	14.287	up to 0.28 Vpp	up to 0.56 Vpp	1.2 V ... VDDA - 1.3 V	1.4 V ... VDDA - 1.4 V
0x06	10.000	up to 0.4 Vpp	up to 0.8 Vpp	1.2 V ... VDDA - 1.3 V	1.4 V ... VDDA - 1.5 V
0x05	8.000	up to 0.5 Vpp	up to 1 Vpp	0.8 V ... VDDA - 1.4 V	1.0 V ... VDDA - 1.6 V
0x04	6.667	up to 0.6 Vpp	up to 1.2 Vpp	0.8 V ... VDDA - 1.4 V	1.1 V ... VDDA - 1.7 V
0x03	5.333	up to 0.75 Vpp	up to 1.5 Vpp	0.9 V ... VDDA - 1.5 V	1.3 V ... VDDA - 1.9 V
0x02	4.000	up to 1 Vpp	up to 2 Vpp	1.2 V ... VDDA - 1.6 V	1.7 V ... VDDA - 2.1 V
0x01	3.333	up to 1.2 Vpp	up to 2.4 Vpp	1.2 V ... VDDA - 1.7 V	1.8 V ... VDDA - 2.3 V
0x00	2.667	up to 1.5 Vpp	up to 3 Vpp	1.3 V ... VDDA - 1.8 V	2.0 V ... VDDA - 2.6 V

Table 6: Input gain

SINOFFS	Adr 0x09, Bit 7:0
COSOFFS	Adr 0x0A, Bit 7:0
Code	Output Offset
0x00	0 V
0x01	-7.8125 mV
...	...
0x7F	-0.9922 V
0x80	0 V
0x81	+7.8125 mV
...	...
0xFF	+0.9922 V
Notes	*) With REFOFFS = 0x00 and VDDA = 5 V.

Table 7: Sine/cosine offset calibration

REFOFFS	Adr 0x0B, Bit 1
Code	Reference Voltage
0x00	Dependent on VDDA (example of application: MR sensors)
0x01	Not dependent on VDDA (example of application: Sin/Cos encoders)

Table 8: Offset reference

RATIO	Adr 0x0B, Bit 0, Adr 0x08, Bit 3:0		
Code	COS / SIN	Code	COS / SIN
0x00	1.0000	0x10	1.0000
0x01	1.0067	0x11	0.9933
...
0x0F	1.1	0x1F	0.9000

Table 9: Amplitude calibration

PHASE	Adr 0x0B, Bit 7:2		
Code	Phase Shift	Code	Phase Shift
0x00	90°	0x20	90°
0x01	90.703125°	0x21	89.296875°
...
0x12	102.65625°	0x32	77.34375°
...	102.65625°	...	77.34375°
0x1F	102.65625°	0x3F	77.34375°

Table 10: Phase calibration

CONVERTER FUNCTIONS

SELRES Adr 0x00, Bit 4:0		
Code	Binary Resolutions	Examples of Permissible Input Frequencies $f_{in,max}$ (FCTR 0x0004, 0x4302)
0x00	-	
0x01	-	
0x02	-	
0x03	8192	158 Hz, 1.06 kHz
0x04	4096	317 Hz, 2.12 kHz
0x05	2048	634 Hz, 4.24 kHz
0x06	1024	1.27 kHz, 8.5 kHz
0x07	512	2.54 kHz, 17 kHz
0x08	256	5.1 kHz, 34 kHz
0x09	128	10.2 kHz, 68 kHz
0x0A	64	20.3 kHz, 136 kHz
0x0B	32	40.6 kHz (max. 250 kHz)
0x0C	16	81.3 kHz (max. 250 kHz)
0x0D	8	162 kHz (max. 250 kHz)
0x0E	-	
0x0F	-	

Table 11: Binary resolutions

SELRES Adr 0x00, Bit 4:0		
Code	Decimal Resolutions	Examples of Permissible Input Frequencies $f_{in,max}$ (FCTR 0x0004, 0x4302)
0x10	2000	650 Hz, 4.3 kHz
0x11	1600	812 Hz, 5.5 kHz
0x12	1000	1.3 kHz, 8.6 kHz
0x13	800	1.6 kHz, 10.8 kHz
0x14	500	2.6 kHz, 17 kHz
0x15	400	3.2 kHz, 22 kHz
0x16	250 *1	5.2 kHz, 35 kHz
0x17	125 *1,2	5.2 kHz, 35 kHz
0x18	320	4.1 kHz, 27 kHz
0x19	160 *2	4.1 kHz, 27 kHz
0x1A	80 *4	4.1 kHz, 27 kHz
0x1B	40 *8	4.1 kHz, 27 kHz
0x1C	200	6.5 kHz, 43.3 kHz
0x1D	100 *2	6.5 kHz, 43.3 kHz
0x1E	50 *1,4	6.5 kHz, 43.3 kHz
0x1F	25 *1,8	6.5 kHz, 43.3 kHz

Notes

- *1 Not suitable for incremental output on A, B.
- *2,4,8 The internal resolution is higher by a factor of 2, 4 or 8.

Table 12: Decimal resolutions

HYS Adr 0x01, Bit 7:5			
Code	Hysteresis in degrees	Hysteresis in LSB	Absolute error*
0x00	0°		
0x01	0.0879°	1 LSB @ 12 bit	0.044°
0x02	0.1758°	1/2 LSB @ 10 bit	0.088°
0x03	0.3516°	1 LSB @ 10 bit	0.176°
0x04	0.7031°	1/2 LSB @ 8 bit	0.352°
0x05	1.4063°	1 LSB @ 8 bit	0.703°
0x06	5.625°		2.813°
0x07	45°	only recommended for calibration	22.5°

Notes

*) The resulting absolute error is equivalent to half the angle hysteresis.

Table 13: Hysteresis

CFGOSC Adr 0x07, Bit 2:0	
Code	Trimming Frequency
0x00	No change
0x01	-10 %
0x02	-14.4 %
0x03	-22 %
0x04	Not permissible
0x05	+12.5 %
0x06	+6.25 %
0x07	-4.5 %

Table 14: Oscillator calibration

MAXIMUM POSSIBLE CONVERTER FREQUENCY

The converter frequency automatically adjusts to the value required by the input frequency and resolution. This value ranges from zero to a maximum dependent on the oscillator frequency that is set via register FCTR.

Serial data output

For BiSS or SSI output the maximum possible converter frequency can be adjusted to suit the maximum input frequency; an automatic converter resolution step-down feature can be enabled via the FCTR register. Should the input frequency exceed the frequency limit of the selected converter resolution, the

LSB is kept stable and not resolved any further; the interpolation resolution halves.

If the next frequency limit is overshot, the LSB and LSB +1 are kept stable and so on. If the input frequency again sinks below this frequency threshold, fine resolution automatically returns.

With the programming of CRC6=1 a resolution step-down will be signalled via the BiSS warning bit.

Max. Possible Converter Frequency For Serial Data Output							Examples*			
FCTR	Resolution Requirements		Protocol		Max. Input Frequency $f_{\text{in max}}$	Restrictions at high input frequency	fin _{max} [kHz] at resol.			
	Min. Res.	bin	dec	BiSS			8192	1024	200	
0x0004		X	X	X	X	f(OSC)min / 40 / Resolution	-	0.16	1.27	6.5
0x4102	≥ 8	X	X	X	X	f(OSC)min / 24 / Resolution	Rel. angle error 2x increased	0.26	2.1	10.8
0x4202	≥ 16	X	X	X	X	2 x f(OSC)min / 24 / Res.	Rel. angle error 4x increased	0.53	4.2	21.6
0x4302	≥ 32	X	X	X	X	4 x f(OSC)min / 24 / Res.	Rel. angle error 8x increased	1.06	8.5	43.3
0x4702	≥ 64	X	-	X	X	8 x f(OSC)min / 24 / Res.	Resolution lowered by factor of 2	2.1	16.9	-
0x4B02	≥ 128	X	-	X	X	16 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-4	4.2	33.8	-
0x4F02	≥ 256	X	-	X	X	32 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-8	8.5	67.7	-
0x5302	≥ 512	X	-	X	X	64 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-16	16.9	135	-
0x5702	≥ 1024	X	-	X	X	128 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-32	33.8	250	-
0x5B02	≥ 2048	X	-	X	X	256 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-64	67.7	-	-
0x5F02	≥ 4096	X	-	X	X	512 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-128	135	-	-
0x6302	8192	X	-	X	X	1024 x f(OSC)min / 24 / Res.	Res. lowered by factor of 2-256	250	-	-
Notes	*) Calculated with fosc()min taken from Electrical Characteristics, item A01.									

Table 15: Maximum converter frequency for serial data output.

Incremental output to A, B and Z

Settings for the maximum possible converter frequency using register FCTR are governed by two criteria:

1. The maximum input frequency
2. System restrictions caused by slow counters or data transmission via cable

also make a suitable zero-delay digital glitch filter that acts on ESD impact on the sensor and keeps the output signals spike free through temporal separation, for example.

Serial data output is possible at any time in BiSS or SSI protocol. However, for the transfer of angle data to the output register the incremental output is halted for one period of the clock signal at pin MA.

In this case it is sensible to preselect a minimum transition distance for the output signals. These settings

1. Max. Possible Converter Frequency Defined By The Maximum Input Frequency						Examples*		
FCTR	Output Frequency fout @ fin _{max} A, B	Resolution Requirem. bin dec		Maximum Input Frequency fin _{max}	Restrictions at high input frequency	fin _{max} [kHz] at resol.		
		bin	dec			8192	1024	200
0x0004	325 kHz	X	X	f(OSC)min / 40 / Resolution	None	0.16	1.27	6.5
0x4102	542 kHz	X	X	f(OSC)min / 24 / Resolution	Relative angle error 2x increased	0.26	2.1	10.8
0x4202	1.08 MHz	X	X	2 x f(OSC)min / 24 / Res.	Relative angle error 4x increased	0.53	4.2	21.6
0x4302	2.17 MHz	X	X	4 x f(OSC)min / 24 / Res.	Relative angle error 8x increased	1.06	8.5	43.3
Notes	*) Calculated with fosc()min taken from Electrical Characteristics, item A01.							

Table 16: Maximum possible converter frequency for incremental A/B/Z output, defined by the maximum input frequency

2. Max. Possible Converter Frequency Defined By The Minimum Transition Distance						Example* t _{MTD} [usec]	
FCTR	Output Frequency fout @ t _{MTD} A, B	Resolution Requirem. bin dec		Minimum Transition Distance at A, B t _{MTD}	Restrictions at high input frequency		
		bin	dec		Notes		
0x00FF	11 kHz	X	X	2048 / f(OSC)max	None	22.8	
0x00FE	11.03 kHz	X	X	2040 / f(OSC)max	None	22.7	
0x00FD	11.07 kHz	X	X	2032 / f(OSC)max	None	22.6	
...	
0x0006	402 kHz	X	X	56 / f(OSC)max	None	0.62	
0x0005	536 kHz	X	X	48 / f(OSC)max	None	0.53	
0x0004	562 kHz	X	X	40 / f(OSC)max	None	0.44	
0x4102	938 kHz	X	X	24 / f(OSC)max	Relative angle error 2x increased	0.27	
0x4202	1.87 MHz	X	X	12 / f(OSC)max	Relative angle error 4x increased	0.13	
0x4302	3.75 MHz	X	X	6 / f(OSC)max	Relative angle error 8x increased	0.07	
Notes	*) Calculated with fosc()max taken from El.Char., item A01; transition distance output A vs. output B with same direction of rotation.						

Table 17: Maximum possible converter frequency for incremental A/B/Z output, defined by the minimum transition distance

INCREMENTAL SIGNALS




CFGABZ		Adr 0x02, Bit 3:2		
Code	Mode	A	B	Z
0x00	Normal	A	B	Z
0x01	Control signals for external period counters	CA	CB	CZ
0x02	Calibration mode Offset+Phase The following settings are required additionally: SELRES = 0x0D ZPOS = 0x00 HYS = 0x07 ROT = 0x00 CFGAB = 0x00 AERR = 0x00			
0x03	Calibration mode Offset+Amplitude The following settings are required additionally: SELRES = 0x0D ZPOS = 0x00 HYS = 0x07 ROT = 0x00 CFGAB = 0x00 AERR = 0x00			
Notes	*) Trimmed accurately when duty cycle is 50%; Recommended trimming order (after selecting GAIN): offset, phase, amplitude ratio, offset;			

Table 18: Outputs A, B, Z

ROT	Adr 0x02, Bit 5
Code	Code direction
0x00	Ascending order, B then A
0x01	Descending order, A then B

Table 19: Code direction

CBZ	Adr 0x02, Bit 4
Code	Reset via zero
0x00	Not activated
0x01	Activated

Table 20: Reset enable for period counter

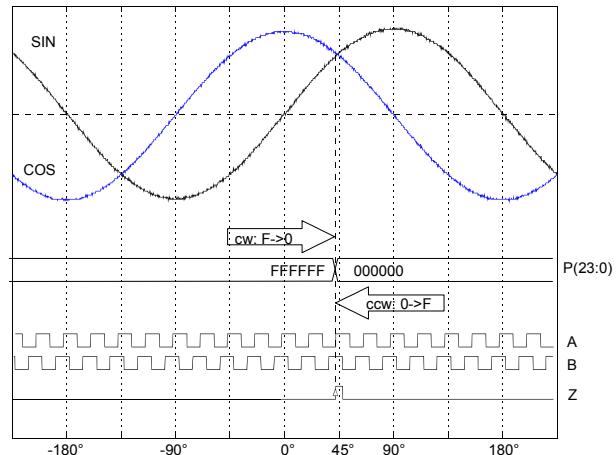


Figure 11: Period counter reset by zero signal (enabled by CBZ = 1).

Example gives a resolution of 64 (SELRES = 0x0A), a zero signal at 45° (ZPOS = 0x04, CFGAB = 0x00) and no inversion of the direction of rotation (ROT = 0x00, COS leads SIN).

ENRESDEL		Adr 0x02, Bit 7
Code	Output*	Function
0x00	immediately	An external counter displays the absolute angle following power-on.
0x01	after 5 ms	An external counter only displays changes vs. the initial power-on (conditional on standby at power-on)
Notes	*) Output delay after device configuration and internal reset.	

Table 21: Output delay A, B, Z

ZPOS	Adr 0x01, Bit 4:0
Code	Position
0x00	0°
0x08	90°
0x10	180°
0x18	270°
0x01	11.25° (1 x 11.25°)
...	...
0x1F	348.75° (31 x 11.25°)
Notes	The zero signal is only output if released by the input pins (for instance with PZERO = 5 V, NZERO = VREF).

Table 22: Zero signal position

CFGZ	Adr 0x02, Bit 1:0
Code	Length
0x00	90°
0x01	180°
0x02.. 03	Synchronization

Table 23: Zero signal length

CFGAB	Adr 0x03, Bit 5:4
Code	Z = 1 for
0x00	B = 1, A = 1
0x01	B = 0, A = 1
0x02	B = 1, A = 0
0x03	B = 0, A = 0

Table 24: Zero signal logic

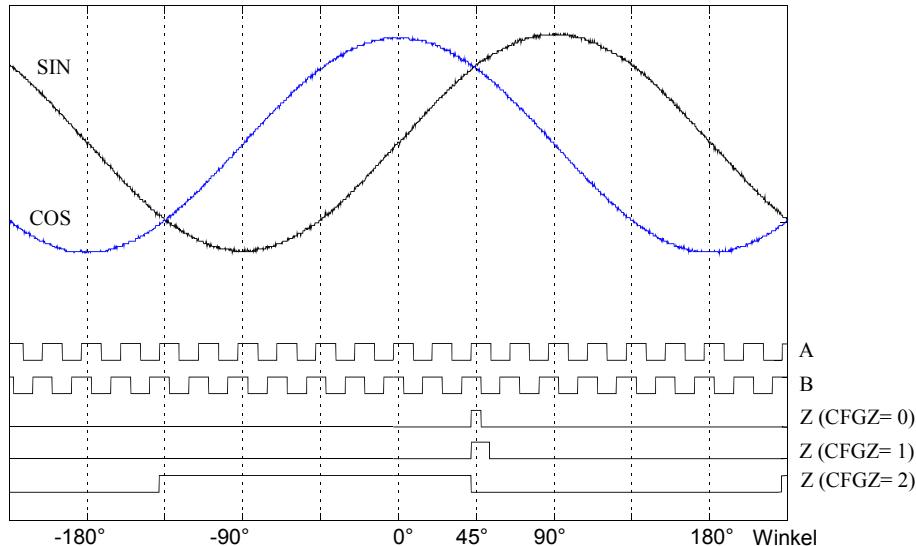


Figure 12: Incremental output signals for various zero signal lengths.

Example gives a resolution of 64 (SELRES = 0x0A), a zero signal position of 45° (ZPOS = 0x04, CFGAB = 0x00) and no inversion of the direction of rotation (ROT = 0x00, COS leads SIN).

SIGNAL MONITORING and ERROR MESSAGES

SELAMPL AMPL		Adr 0x0C, Bit 2 Adr 0x0C, Bit 1:0
Code	Max (Sin , Cos)	
	Voltage threshold V_{th}	Output amplitude*
0x00	0.60 x VDDA	1.4 V _{pp}
0x01	0.64 x VDDA	2.0 V _{pp}
0x02	0.68 x VDDA	2.6 V _{pp}
0x03	0.72 x VDDA	3.1 V _{pp}
	$\sin^2 + \cos^2$	
Code	$V_{thmin} \leftrightarrow V_{thmax}$	Output amplitude*
0x04	0.20 ↔ 0.9 x VDDA	1.0 V _{pp} ↔ 4.5 V _{pp}
0x05	0.30 ↔ 0.9 x VDDA	1.5 V _{pp} ↔ 4.5 V _{pp}
0x06	0.40 ↔ 0.9 x VDDA	2.0 V _{pp} ↔ 4.5 V _{pp}
0x07	0.50 ↔ 0.9 x VDDA	2.5 V _{pp} ↔ 4.5 V _{pp}
Notes	*) Entries are calculated with VDDA = 5 V.	

Table 25: Signal amplitude monitoring





Figure 13: Signal monitoring at minimum amplitude.

Figure 14: $\sin^2 + \cos^2$ signal monitoring.

AERR		Adr 0x03, Bit 1
Code	Amplitude error message	
0x00	disabled	
0x01	enabled	

Table 26: Amplitude error

FERR		Adr 0x03, Bit 0
Code	Excessive frequency error message	
0x00	disabled	
0x01	enabled	
Notes	Input frequency monitoring is operational for resolutions ≥ 16	

Table 27: Frequency error

Error Messages		
Failure Mode	Error bits E1, E0 for BiSS and SSI CRC6 = 0	Error bits nE, nW for BiSS and SSI CRC6 = 1
No error	1, 1	1, nW
Amplitude error	0, 1	0, nW
Frequency error	1, 0	0, nW
System error*	0, 0	0, nW
Warning**	—	nE, 0
Notes		
*System error	NERR pulled low by external signal	
**Warning	Automatic step-back of resolution	
Line Signal SLO	Data output is deactivated and SLO permanently high in case of: configuration phase, invalid configuration, undervoltage.	

Table 30: Error messages

Configuration error	
-	Always enabled

Table 28: Configuration error

Error Indication at NERR	
Failure Mode	Pin signal NERR
No error	HI
Amplitude error	LO/HI = 75 % (resp. HI for AERR = 0)
Frequency error	LO/HI = 50 % (resp. HI for FERR = 0)
Configuration	LO
Undervoltage	LO
System error	NERR = low caused by an external error signal

Table 29: Error indication at NERR

To enable the diagnosis of faults, the various types of error are signaled at NERR using a PWM code as given in the key on the left.

Two error bits are provided to enable communication via the I/O interface; these bits can decode four different types of error. If NERR is held at low by an external source, such as an error message from the system, for example, this can also be verified via the I/O interface.

Errors are stored until the sensor data is output via the I/O interface and then deleted. Errors at NERR are displayed for a minimum of ca. 10 ms unless they are deleted beforehand by a data output.

If an error in amplitude occurs, conversion is terminated and the incremental output signals halted. An

error in amplitude rules out the possibility of an error in frequency.

TEST FUNCTIONS

TMODE Adr 0x06, Bit 3:1		
Code	Signal at Z	Description
0x00	Z	no test mode
0x01	A xor B	Output A EXOR B
0x02	ENCLK	iC-Haus device test
0x03	NLOCK	iC-Haus device test
0x04	CLK	iC-Haus device test
0x05	DIVC	iC-Haus device test
0x06	PZERO - NZERO	iC-Haus device test
0x07	TP	iC-Haus device test
Condition	CFGABZ = 0x00	

Table 31: Test mode

TMA Adr 0x06, Bit 0				
Code	Pin A	Pin B	Pin SDA	Pin SCL
0x00	A	B	SDA	SCL
0x01	COS+	COS-	SIN+	SIN-
Notes	To permit the verification of GAIN and OFFSET settings, signals are output after the input amplifier. A converter signal of 4 Vpp is the ideal here and should not be exceeded. Loads of $1\text{ M}\Omega$ and above are recommended for accurate measurement. EEPROM access is not possible during mode TMA.			

Table 32: Analog test mode

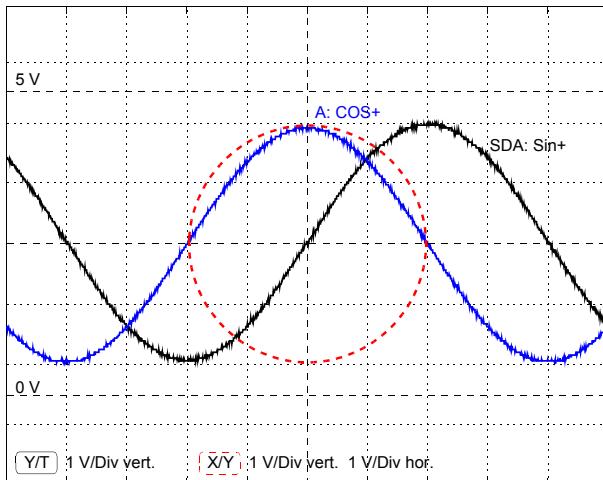


Figure 15: Calibrated signals in TMA mode.

The signal is set to ca. 4 Vpp using GAIN and must not be altered after calibration. Both display modes are suitable for OFFS (positive values) and RATIO adjustments; X/Y mode is preferable for PHASE. Test signals COS- (pin B) and SIN- (pin SCL) must be selected to set negative values for OFFS.

I/O INTERFACE: BiSS C PROTOCOL

The serial I/O interface operates in BiSS C protocol mode and enables sensor data to be output in uninterrupted cycles (data channel SCD). At the same time parameters can be exchanged via bidirectional register communication (data channel CD).

The sensor data produced by iC-NQC contains the angle value (S) with 3 to 13 bits, the period count (P) with 0, 8, 12 or 24 bits, two error bits (E1 and E0) and 5 or 6 CRC bits (CRC).

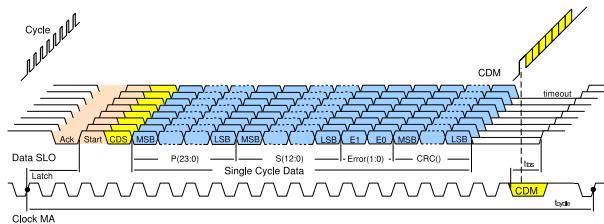


Figure 16: Example line signals (BiSS C)

Single Cycle Data Channel: SCD		
Bits	Typ	Label
0...24	DATA	Period counter P(23:0): 0, 8, 12, 24 bit (multiturn position)
3...13	DATA	Angle data S(12:0): 3 bis 13 bit (singleturn position)
1	ERROR	Error bit E1 (amplitude error)
1	ERROR	Error bit E0 (frequency error)
5...6	CRC	Polynomial 0x25 $x^5 + x^2 + x^0$ (inverted bit output) - oder - Polynomial 0x43 $x^6 + x^1 + x^0$ (inverted bit output)

Table 33: BiSS data channels

Interface Parameters With BiSS C Protocol

SELSSI		
Code	Protocol	Information
0	BiSS C	 www.biss-interface.com
1	SSI	

Table 34: Protocol version

TIMO			
Code	Clock	Timeout t_{tos}	fclk(MA) min*
0	46-47	ca. 20 μ s	50 kHz
1	5-6	ca. 2.5 μ s	400 kHz
TOA	Addr 0x07, Bit 3		
0	see TIMO	see BiSS specification	
1	adaptive with $T_{CLK} = 42/fosc$	50 kHz	
Notes	A ref. clock count is equal to $\frac{32}{fosc}$ (see El. Char., A02). The permissible max. clock frequency is specified by E06. *) A low clock frequency can reduce the permissible maximum input frequency since conversion is paused for one MA cycle from Latch onwards.		

Table 35: Timeout configuration (protectable)

M2S		
Code	Data Length	CRC Polynomial
0x00	-	0x25 (with CRC6 = 0)
0x01	P(7:0)	0x25 (with CRC6 = 0)
0x02	P(11:0)	0x43
0x03	P(23:0)	0x43

Table 36: Period counter output

CRC6		
Code	CRC Polynomial	Status Messages
0	determined by M2S	E1, E0
1	0x43	nE, nW

Table 37: CRC polynomial

NZB	Adr 0x03, Bit 6
Code	Function
0	Zero bit
1	No zero bit
Notes	The optional zero bit is output as the final bit after the CRC.

Table 38: Zero bit

ENCDS	Adr 0x00, Bit 7
Code	Description
0x00	Data output BiSS B or SSI
0x01	Data output BiSS C

Table 39: Protocol options

M2S can be used to set the number of period counter bits sent as sensor data. The counter bits are transmitted before the angle value, with the MSB leading.

The 5-bit CRC output is based on polynomial 0x25 (100101b), with the 6-bit CRC output based on polynomial 0x43 (1000011b) automatically becoming active with longer SCD data, or when preselected by CRC6. As a rule, CRC bits are sent inverted.

An additional zero bit can be output following the CRC bits. However, disabling the zero bit by NZB = 1 is recommended when the output data length does not need to comply with existing applications.

To obtain a position data output being compatible to the BiSS B protocol parameter ENCDS = 0 does switch off the CDS bit, without a replacement by a zero bit. Thus, the output data length is shortened by one bit and register communication is limited to the direction of the master to the slave. The bidirectional BiSS C register communication must be enabled by setting ENCDS = 1.

Example Of BiSS Data Output

SCD: Angle data		
Bits	Typ	Label
12	DATA	Angle data S(11:0)
2	ERROR	Error nE and warning nW
6	CRC	Polynomial 0x43
Config.	SELRES = 0x04, M2S = 0x00, CRC6 = 0, NZB = 1	

Table 40: Example format 1 for BiSS profile BP1

SCD: Angle data with 8-bit period count		
Bits	Type	Label
8	DATA	Period counter P(7:0)
13	DATA	Angle data S(12:0)
2	ERROR	Error bits E1, E0
5	CRC	Polynomial 0x25
1	Zero	Zero bit
Config.	SELRES = 0x03, M2S = 0x01, CRC6 = 0, NZB = 0	

Table 41: Example format 2

SCD: Angle data with 24-bit period count		
Bits	Type	Label
24	DATA	Period counter P(23:0)
13	DATA	Angle data S(12:0)
2	ERROR	Error bits E1, E0
6	CRC	Polynomial 0x43 (no zero bit)
Config.	SELRES = 0x03, M2S = 0x03, CRC6 = 0, NZB = 1	

Table 42: Example format 3

Register Communication

After the BiSS C protocol slave registers are directly addressed in a reserved address area (0x40 to 0x7F). Other storage areas are addressed dynamically and in blocks. BiSS addresses 0x00 to 0x3F aim for a register bank consisting of 64 bytes, the physical storage address of which is determined by Bank Select n.

iC-NQC supports up to 16 storage banks, making it possible to use an 8-bit EEPROM to its full capacity. There is therefore also enough storage space for an ID plate (EDS) and OEM data.

Information regarding memory map and addressing via BiSS is given on page 25).

Internal Reset Function

A write access at RAM address 0x00 (BiSS address 0x00 with Bank Select n = 0) triggers an internal reset.

Based on the current configuration in the RAM, iC-NQC restarts without reading the EEPROM. The configured interface timeout and write protect settings become active, the period counter is set to zero and any stored configuration errors are deleted. Providing no amplitude error is present, the converter again counts up from an angle value of zero to the current angle position.

Short BiSS Timeout

For programming via the I/O interface iC-NQC has a short BiSS timeout function according to the description of the BiSS C protocol (see page 19, Table 2, El. Char. no. 6).

Regardless of register protection settings a short timeout of typically 1.8 µs can be temporarily activated by writing value 0x07 to address 0x7C (address 124d). A controller can then transmit the device configuration over a shorter period.

TOS	Adr 0x7C, Bit 2:0
Code	Function
000	Regular timeout (configured by TIMO)
001...111	Short timeout (equal to TIMO = 1)

Table 43: Short timeout (via BiSS device ID)

The value written to address 0x7C is also transferred to the EEPROM, provided an EEPROM has been connected up and is available.

On reading address 0x7C the byte stored in the EEPROM is output as part of the BiSS device ID. Here, high-order bits 7:3 are part of the manufacturer's ID; low-order bits 2:0 act as an indicator of the timeout options (regular or short timeout, see Table 43).

I/O INTERFACE: SSI Protocol

iC-NQC can transmit position data in SSI protocol mode; the parameters described in the following give the necessary settings and options.

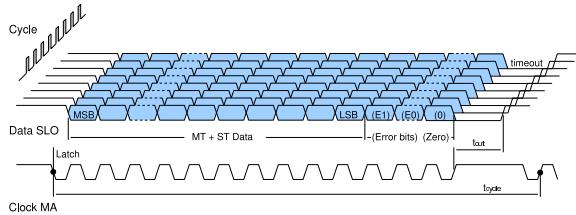


Figure 17: Example line signal (SSI)

SELSSI	Adr 0x02, Bit 6
Code	Protocol
0	BiSS C
1	SSI

Table 44: Protocol version

TIMO	Adr 0x06, Bit 5	
Code	Timeout t_{tos}	fclk(MA)min*
0	Long: ca. 20 µs	50 kHz
1	not permitted	
TOA	Adr 0x07, Bit 3	
0	see TOS	
1	not permitted	
Notes	A ref. clock count is equal to $\frac{32}{f_{osc}}$ (see El. Char. A01). The permissible max. clock frequency is specified by item E06. *) A low clock frequency can reduce the permissible maximum input frequency since conversion is paused for one MA cycle from Latch onwards.	

Table 45: Timeout configuration for SSI

M2S	Adr 0x00, Bit 6:5
Code	Period counter output length
0x00	-
0x01	P(7:0)
0x02	P(11:0)
0x03	P(23:0)

Table 46: Period counter for SSI data output

CRC6	Adr 0x03, Bit 7	
NZB	Adr 0x03, Bit 6	
Code	Additional bits	Ring operation
0 0	E1, E0	no
0 1	none	no
1 0	E1, E0, zero bit	yes
1 1	none	yes

Table 47: Options for SSI data output

GRAY	Adr 0x05, Bit 7
Code	SSI data format
0	binary coded
1	gray coded
Notes	Data output starts with MSB for binary or Gray coded data.

Table 48: SSI data format

Examples Of SSI Data Output

SSI Output Formats																									
13-bit SSI																									
Res	Mode	Error	CRC	T1	T2	T3	T4... T10	T11	T12	T13	T14	T15	T16	T17	T18	T19	T20	T21	T22	T23	T24	T25			
10 bit	SSI	X	-	S9	S8	S7	S6 ... S0	E1	E0	0	Stop														
			Example							0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
13 bit	SSI *1	-	-	S12	S11	S10	S9 ... S3	S2	S1	S0	Stop														
			Example							0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	SSI-R *2	-	-	S12	S11	S10	S9 ... S3	S2	S1	S0	Stop	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2			
			Example							0															
25-bit SSI																									
13 bit	SSI	X	-	S12	S11	S10	S9 ... S3	S2	S1	S0	E1	E0	0	Stop											
			Example										0	0	0	0	0	0	0	0	0	0	0	0	0
8+13 bit*3	SSI	X	-	P7	P6	P5	P4 ... P0, S12, S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	E1	E0	0	Stop			
			Example																					0	0
Configuration				Input SLI = 0, SELSSI = 1, M2S = 0x00, CRC6 = 0, NZB = 0, unless otherwise noted. *1) CRC6 = 0, NZB = 1; *2) CRC6 = 1, NZB = 1; *3) M2S = 0x01																					
Caption				SSI = SSI protocol SSI-R = SSI ring operation																					

Table 49: SSI transmission formats

EEPROM INTERFACE

The serial EEPROM interface consists of the two pins SCL and SDA and enables read and write access to a serial EEPROM with I²C interface (such as a 24C02 with 128 bytes, 5 V type with a 3.3 V function).

The configuration data in the EEPROM, of addresses 0x00 to 0x0F, is secured by a CRC check value to address 0x0F. When the device is powered up, the address range from 0x00 to 0x0F is mapped onto iC-NQC's configuration RAM. The higher memory area contains BiSS C slave registers and optional memory banks available to the sensor system.

The register access to the configuration data and the memory banks 1 to 7 (intended for EDS) can be restricted by parameter RPL.

Example of CRC Calculation Routine

```
unsigned char ucDataStream = 0;
int iCRCPoly = 0x127;
unsigned char ucCRC=0;
int i = 0;

ucCRC = 0; // start value !!!
for (iReg = 0; iReg<15; iReg++)
{
    ucDataStream = ucGetValue(iReg);
    for (i=0; i<=7; i++) {
        if ((ucCRC & 0x80) != (ucDataStream & 0x80))
            ucCRC = (ucCRC << 1) ^ iCRCPoly;
        else
            ucCRC = (ucCRC << 1);
        ucDataStream = ucDataStream << 1;
    }
}
```

CRC_E2P Adr 0x0F, Bit 7:0

Code	Description
0x00	
...	Check value formed by CRC polynomial 0x127
0xFF	

Table 50: Check value for EEPROM data

Register Configuration

BiSS Adr hex	BiSS Adr decimal	Contents
0x00...0F	0...15	Config. Data RAM (16 bytes)
0x10...1F	16...31	Config. Data EEPROM (16 bytes)
0x20...3F	32...63	Unused memory area (32 bytes)
BiSS C Slave-Registers (direct addresses):		
0x40	64	Bank Select (1 byte)
0x41	65	EDS Bank (1 byte)
0x42...43	66...67	Profile ID (2 bytes)
0x44...47	68...71	Serial No. (4 bytes)
0x48...77	72...119	Slave Registers (48 bytes)
Device ID (6 bytes):		
0x78	120	4E (default)
0x79	121	51 (default)
0x7A	122	43 (default)
0x7B	123	31 (default)
0x7C	124	Bit 7:3: Adr 0x00, Bit 2:0: TOS
0x7D	125	00 (default)
Manufacturer's ID (2 bytes):		
0x7E	126	69 (default)
0x7F	127	43 (default)

Table 51: Register overview

RPL	Adr 0x03, Bit 3			
Code	Bank 0 Config. Dat.	0x40..7F BiSS ID	Bank 1..7 EDS	Bank 8..15 User Data
0x0	read / write	read / write	read / write	read / write
0x1	-	read*	read	read / write
Notes	*) Exception: write to 0x40 and 0x7C is always possible.			

Table 52: Register protection settings

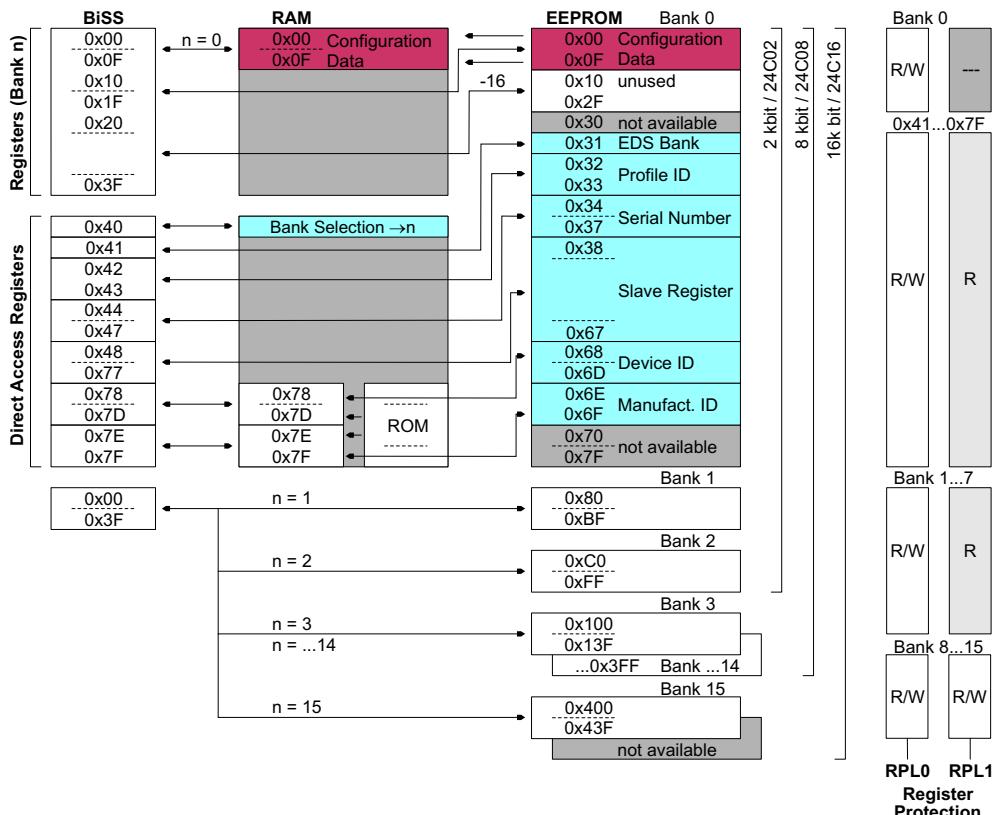


Figure 18: Registers and addressing

STARTUP BEHAVIOR

After the supply has been turned on (power on reset), iC-NQC reads the configuration data from the EEPROM and during this phase halts error pin NERR actively on a low signal (open drain output) as well as data output SLO on a high signal.

After a successful CRC the data output is released and the error indication at pin NERR reset; an external pull-up resistor can supply a high signal. iC-NQC then switches to normal operation and determines the current angle position, providing that a sensor is connected up to it and there is no amplitude error (or this is deactivated).

Should the CRC prove unsuccessful due to a data error (disrupted transmission, no EEPROM or the EEPROM is not programmed), the configuration phase is automatically repeated. After a third failed attempt, the procedure is aborted and error pin NERR remains active, displaying a permanent low.

After startup, iC-NQC does not recognize a defined configuration; the configuration RAM can contain any values.

So that it is always possible to configure the setup using the I/O interface - even without an EEPROM - iC-NQC first ignores parameters TIMO, TOA and RPL.

The I/O interface can then be addressed in BiSS C protocol with the longest timeout (30 µs maximum), without safety settings being observed (cf. RPL = 0x0). This allows the configuration to be written to RAM addresses 0x01 to 0x0C and to address 0x00. Address 0x00 must be written to last of all and triggers an internal reset (see description on page 20).

A short timeout of 3 µs maximum can be temporarily activated by writing value 0x07 to address 0x7C (address 124d) to keep the device configuration time shorter.

When operated without an EEPROM, iC-NQC does not respond to higher addresses - with the exception of the BiSS addresses reserved for manufacturers and device IDs (0x78 to 0x7F). This address area supplies the chip version from the ROM.

APPLICATION NOTES

Principle input circuits

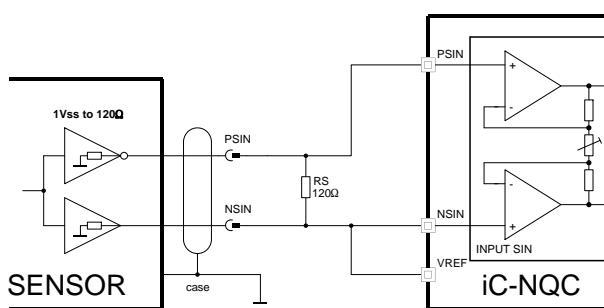


Figure 19: Input circuit for voltage signals of 1 Vpp with no ground reference. When ground is not separated the connection NSIN to VREF must be omitted.

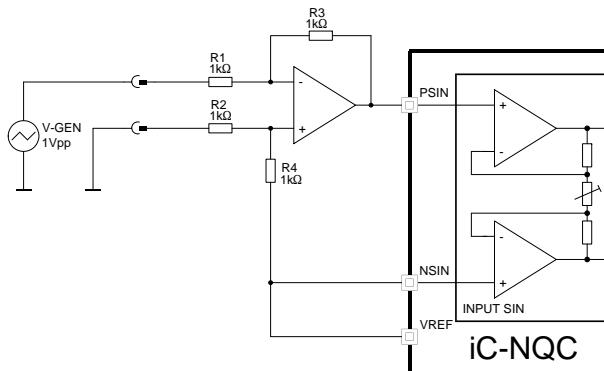


Figure 21: Input circuit for non-symmetrical voltage or current source signals with ground reference (adaptation via resistors R3, R4).

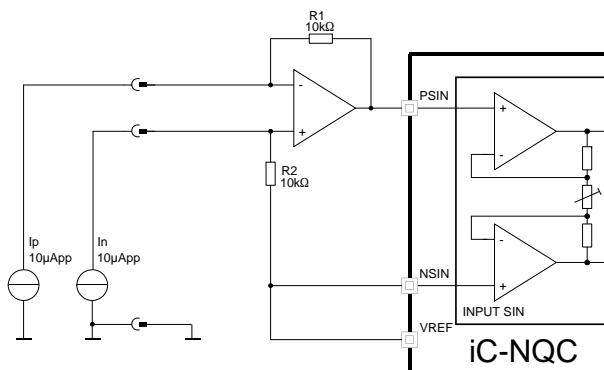


Figure 23: Input circuit for complementary low-side current source outputs, such as for optocoupler iC-WG.

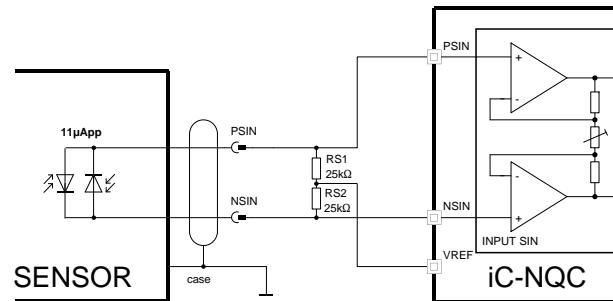


Figure 20: Input circuit for current signals of 11 μA with no ground reference. Offset calibration is not possible with this circuit.

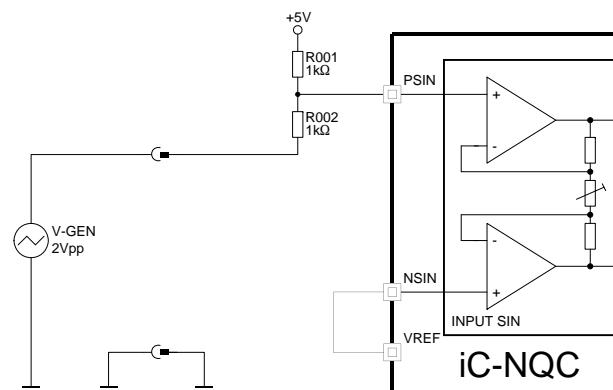


Figure 22: Simplified input wiring for non-symmetrical voltage signals with ground reference.

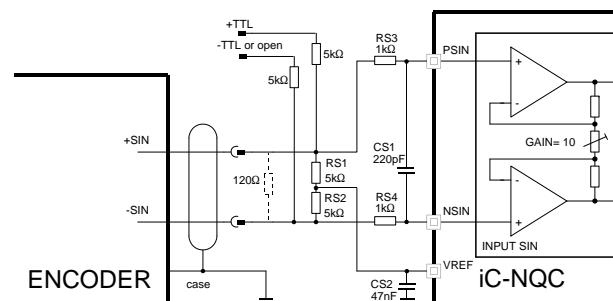


Figure 24: Combined input circuit for 11 μA, 1 Vpp (with 120 Ω termination) or TTL encoder signals. RS3/4 and CS1 serve as protection against ESD and transients.

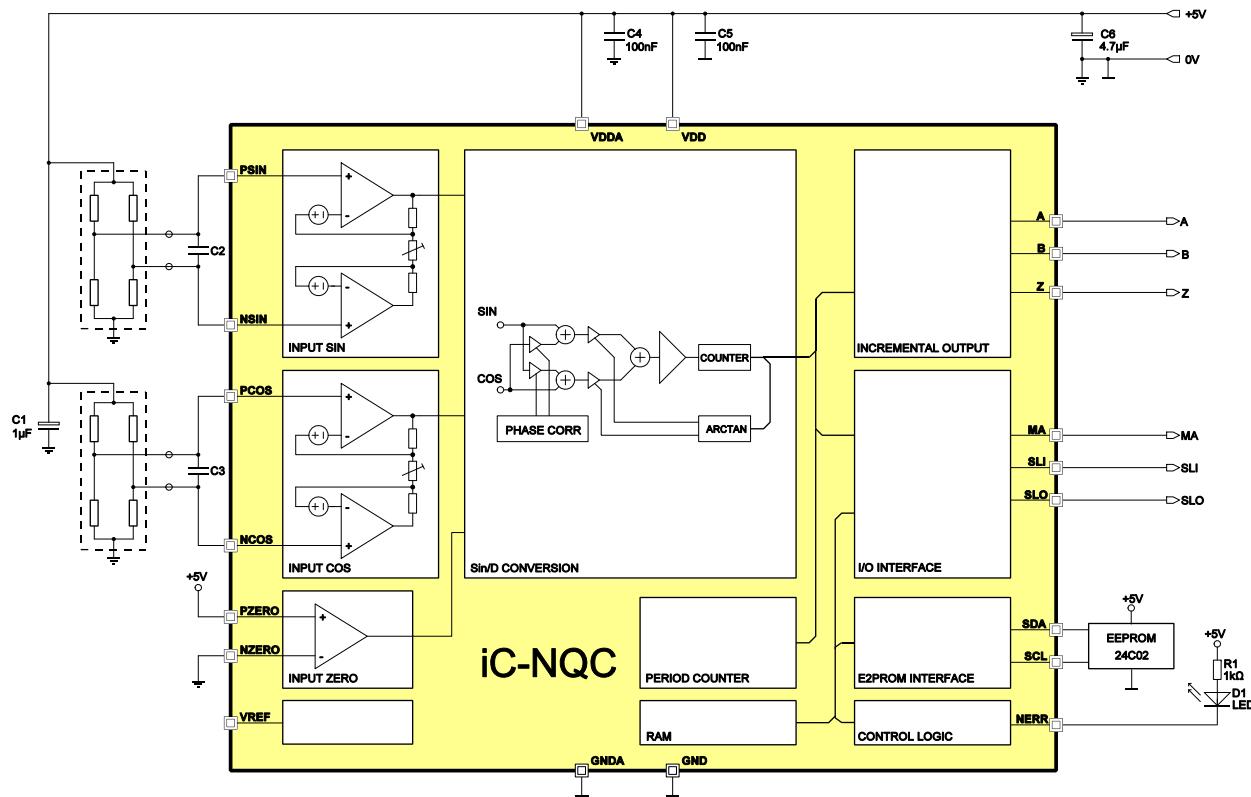
Basic circuit

Figure 25: Basic circuit for the evaluation of MR bridge sensors.

EVALUATION BOARD

iC-NQC comes with a demo board for test purposes.
Instructions are available separately.

DESIGN REVIEW: Function Notes

iC-NQC 1		
No.	Function, Parameter/Code	Description and Application Notes
		Please refer to datasheet release A1.

Table 53: Notes on chip functions regarding iC-NQC chip release 1.

iC-NQC 2		
No.	Function, Parameter/Code	Description and Application Notes

Table 54: Notes on chip functions regarding iC-NQC chip release 2.

iC-NQC

13-bit Sin/D CONVERTER WITH SIGNAL CALIBRATION

preliminary



Rev B1, Page 28/29

iC-Haus expressly reserves the right to change its products and/or specifications. An info letter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.de/infoletter; this letter is generated automatically and shall be sent to registered users by email.

Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

iC-Haus does not warrant the accuracy, completeness or timeliness of the specification and does not assume liability for any errors or omissions in these materials.

The data specified is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

As a general rule our developments, IPs, principle circuitry and range of Integrated Circuits are suitable and specifically designed for appropriate use in technical applications, such as in devices, systems and any kind of technical equipment, in so far as they do not infringe existing patent rights. In principle the range of use is limitless in a technical sense and refers to the products listed in the inventory of goods compiled for the 2008 and following export trade statistics issued annually by the Bureau of Statistics in Wiesbaden, for example, or to any product in the product catalogue published for the 2007 and following exhibitions in Hanover (Hannover-Messe).

We understand suitable application of our published designs to be state-of-the-art technology which can no longer be classed as inventive under the stipulations of patent law. Our explicit application notes are to be treated only as mere examples of the many possible and extremely advantageous uses our products can be put to.

ORDERING INFORMATION

Type	Package	Order Designation
iC-NQC	TSSOP20 4.4 mm	iC-NQC TSSOP20
Evaluation Board		iC-NQC EVAL NQ6D

For technical support, information about prices and terms of delivery please contact:

iC-Haus GmbH
Am Kuemmerling 18
D-55294 Bodenheim
GERMANY

Tel.: +49 (61 35) 92 92-0
Fax: +49 (61 35) 92 92-192
Web: <http://www.ichaus.com>
E-Mail: sales@ichaus.com

Appointed local distributors: http://www.ichaus.com/sales_partners