



SHEET 1 OF 1

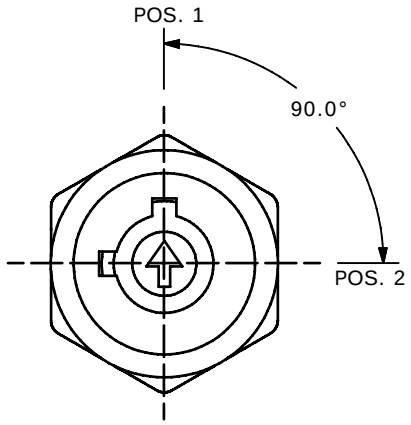


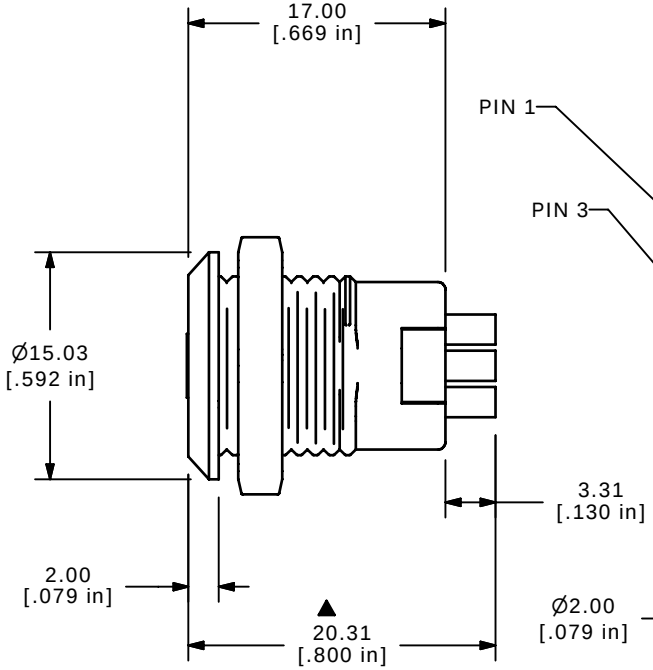

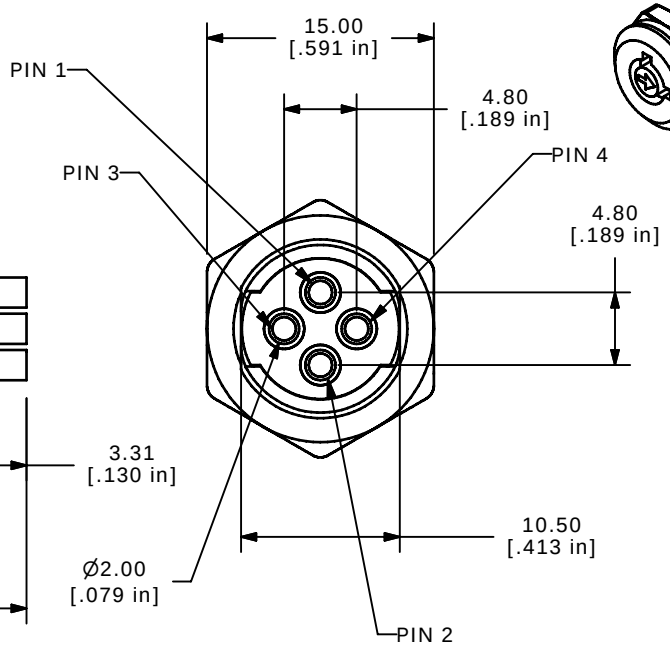


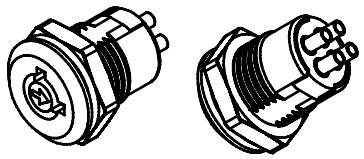

ISOMETRIC
SCALE 1:1




NOTES:
1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: x.x= ±0.4
   x.xx= ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲4. RATING: 1A @125VAC, 0.5A @250VAC
5. CONTACT RESISTANCE: 10milli-OHMS
6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
7. MATERIALS:
   HOUSING: ZINC ALLOY W/CHROME PLATING
   CYLINDER: ZINC ALLOY W/CHROME PLATING
   ▲ TERMINAL AND CONTACTS: SILVER PLATED
   ▲ KEYS (2) KEY CODE 1501: ZINC ALLOY, CHROME PLATING
8. DENOTES CRITICAL PARAMETER.
9. 2002/95/EC (ROHS) COMPLIANT
▲10. KEYLOCK, KEYS, AND HEX NUT TO BE PACKED TOGETHER IN INDIVIDUAL BAGS.



RECOMENDED PANEL CUTOUT

CIRCUT: SPDT
CONTACT CONFIGURATION

90˚ INDEXING



LEGEND

= INDICATES KEY PULL POSSIBLE

= DETENT POSITION

REV	PCR NO	DESCRIPTION	DATE	BY
C	17991	REDRAWN, ADD NOTE 10	3/3/08	RC

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH™

TITLE KO132B1501

SCALE	DATE	DR	DWG	REV
2:1	3/3/2008	RC	K400103	C