

**Notes:**

**Material and finish:**


Contact: Brass  
 Gold over 30~80u" nickel plating  
 Insulation: PA9T UL94-V0, color black

**Specifications:**

Current rating: 3.0A  
 Contact resistance: 20mΩ Max.  
 Withstanding Voltage: 1000V AC/DC  
 Insulation resistance: 1000MΩ Min.  
 Operating temperature: -40°C to +105°C

**Tube Packaging Q'ty**

14	16
12	19
10	22
8	28
6	38
4	57
2	114
No. of positions	Q'ty per tube

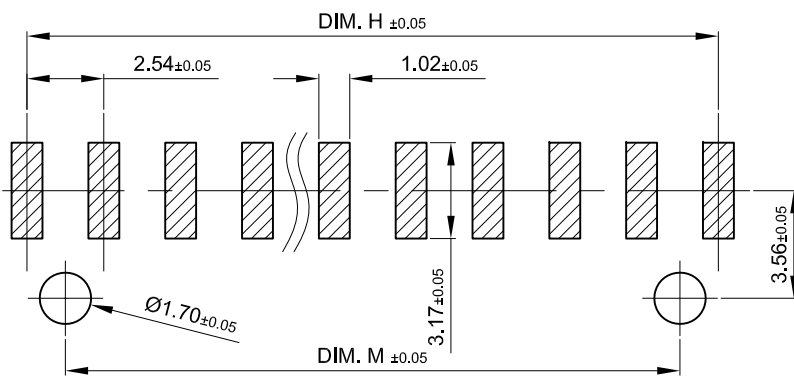

**PCB Layout**

129057	129050	129043	129036	14	35.56	33.02	30.48	56
129056	129049	129042	129035	12	30.48	27.94	25.40	56
129055	129048	129041	129034	10	25.40	22.86	20.32	44
129054	129047	129040	129033	8	20.32	17.78	15.24	44
129053	129046	129039	129032	6	15.24	12.70	10.16	32
129052	129045	129038	129031	4	10.16	7.62	5.08	24
129051	129044	129037	129030	2	5.08	2.54	0.00	24

Id-Nr. Tape&Reel	Id-Nr. Tube	Id-Nr. Tape&Reel	Id-Nr. Tube	No of Pos.	DIM. G	DIM. H	DIM. M	DIM. N
10u" gold plating	10u" gold plating	0.8u" gold plating	0.8u" gold plating					

Information:	Tolerances X ±0.50 X' ±10° X.X ±0.40 X.X' ±5° X.XX ±0.25 X.XX' ±3°	Scale 4:1
--------------	---	-----------

All rights reserved. Only for Information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using

Subject to modification without prior notice. Drawing will not be updated.

Designation  
**2.54mm R/A Single Row Header SMT with Locating Pegs**

ERNI	ERNI Asia Holding www.erni.com	129029
------	-----------------------------------	--------

A	13-08-2013	
Rev.	Date	129029.DWG