
ES CAPS
Polyolefin, Dual-Wall
Semi-Rigid, Heat - Shrinkable

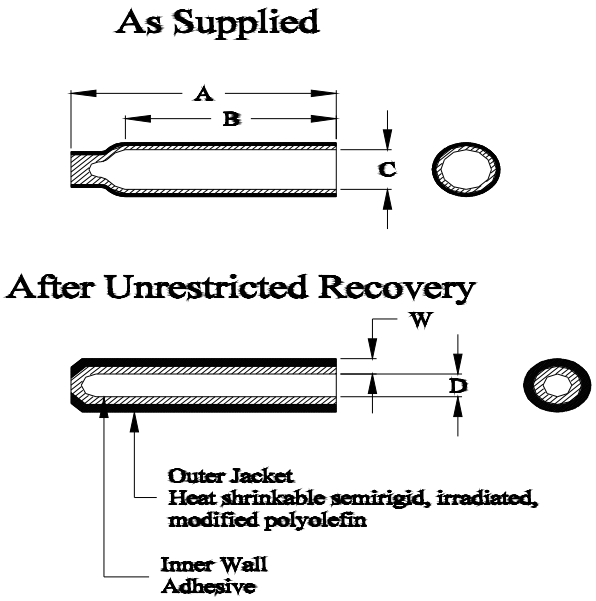

Color:	Black or Clear
Temperature rating:	-40°C to 105°C
Material:	Per RW-3006

Specification Control Drawing

TE Connectivity 300 Constitutional Drive Menlo Park, CA 94025 USA			Raychem	Title: ES CAPS Polyolefin, Dual-Wall Semi-Rigid, Heat - Shrinkable	
TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : ES CAPS		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 18-Apr-11	Rev.: B1	Sheet: 1 of 2

Table 1

Dimensions (*mm* /In)

Part No.	A ±*3.81*/.150	B Min.	C Min.	D Max.	W Min.	Adhesive Wall min.
ES-CAP-No.1-30mm	*30*/1.18	*16.78*/.660	*5.7*/.225	*1.3*/.050	*1.2*/.047	*.56*/.022
ES-CAP-No.1-35mm	*35*/1.38	*21.18*/.833	*5.7*/.225	*1.3*/.050	*1.2*/.047	*.56*/.022
ES-CAP-No.1-40mm	*40*/1.575	*25.58*/1.005	*5.7*/.225	*1.3*/.050	*1.2*/.047	*.56*/.022
ES-CAP-No.1-45mm	*45*/1.772	*28.45*/1.120	*5.7*/.225	*1.3*/.050	*1.2*/.047	*.56*/.022
ES-CAP-No.1-50mm	*50*/1.97	*36.68*/1.445	*5.7*/.225	*1.3*/.050	*1.2*/.047	*.56*/.022
ES-CAP-No.2-30mm	*30*/1.18	*16.78*/.660	*7.4*/.293	*1.7*/.065	*1.52*/.060	*.76*/.030
ES-CAP-No.2-35mm	*35*/1.38	*21.18*/.833	*7.4*/.293	*1.7*/.065	*1.52*/.060	*.76*/.030
ES-CAP-No.2-40mm	*40*/1.575	*25.58*/1.005	*7.4*/.293	*1.7*/.065	*1.52*/.060	*.76*/.030
ES-CAP-No.2-50mm	*50*/1.97	*36.68*/1.445	*7.4*/.293	*1.7*/.065	*1.52*/.060	*.76*/.030
ES-CAP-No.3-30mm	*30*/1.18	*16.78*/.660	*10.8*/.427	*2.41*/.095	*1.91*/.075	*1.02*/.040
ES-CAP-No.3-35mm	*35*/1.38	*21.18*/.833	*10.8*/.427	*2.41*/.095	*1.91*/.075	*1.02*/.040
ES-CAP-No.3-40mm	*40*/1.575	*22.48*/.920	*10.8*/.427	*2.41*/.095	*1.91*/.075	*1.02*/.040
ES-CAP-No.3-50mm	*50*/1.97	*33.58*/1.320	*10.8*/.427	*2.41*/.095	*1.91*/.075	*1.02*/.040