

T1/CEPT/ISDN PRI Interface Transformer

Electrical Specifications @ 25°C

Turns Ratio ($\pm 3\%$)	1:1.14CT & 1:2CT
---------------------------	------------------

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5 & 1.5		mH
Leakage Inductance		0.5 & 0.8	μ H
Capacitance ($C_{w/w}$)		40 & 40	pF
Primary DC Resistance		0.7 & 0.7	Ohms
Secondary DC Resistance		1.0 & 1.4	Ohms
Operating Temp Range	-40	+85	°C

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 33 pieces per tube

Tape & Reel Available


Primary Pins 14-16 & 6-8

Isolation 2000 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

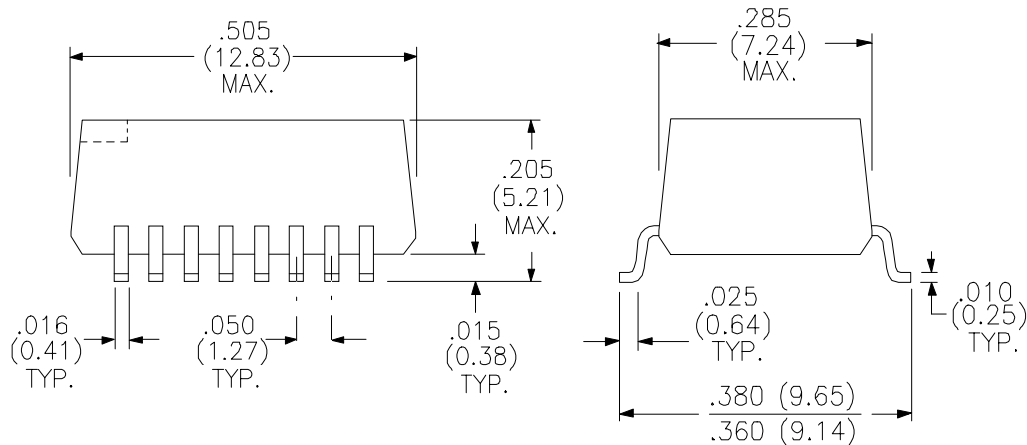

Schematic Diagram

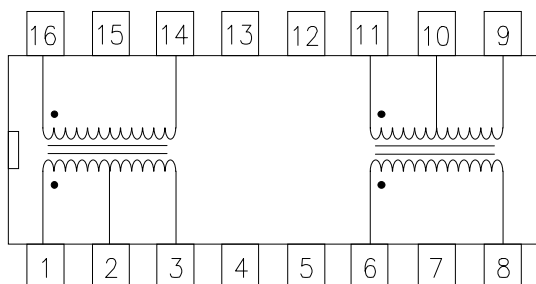

Rhombus P/N: **T-14110**

Cust. P/N:

Name:

Date: **2/12/98**

Sheet: 1 of 1