


- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: -25°C~85°C;
 - 3、额定电压: 50V, AC; DC (等效);
 - 4、接触电阻: $\leq 0.03\Omega$;
 - 5、绝缘电阻: $\geq 500M\Omega$;
 - 6、耐压: 500V, AC/minute.

TOLERANCE TABLE	
.0	±0.30
.00	±0.20
.000	±0.05

Item No.	Description	Material	Quantity	Notes
1	插接件	PPSUL94V-01	1	
2	插接件	PPSUL94V-01	1	
3	插接件	PPSUL94V-01	1	
4	插接件	PPSUL94V-01	1	

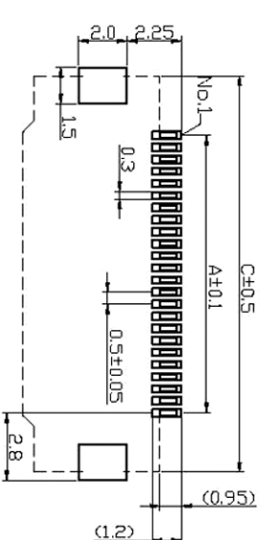

Pin位	Type	A	B	C	Pin位	Type	A	B	C
4	0.5-15-04RX	1.5	2.6	6.1	34	0.5-15-34RX	16.5	17.6	21.4
5	0.5-15-50RX	2	3.1	6.9	35	0.5-15-34RX	17	18.1	21.9
6	0.5-15-60RX	2.5	3.6	7.4	36	0.5-15-35RX	17.5	18.6	22.4
7	0.5-15-70RX	3	4.1	7.9	37	0.5-15-36RX	18	19.1	22.9
8	0.5-15-80RX	3.5	4.6	8.4	38	0.5-15-37RX	18.5	19.6	23.4
9	0.5-15-90RX	4	5.1	8.9	39	0.5-15-38RX	19	20.1	23.9
10	0.5-15-100RX	4.5	5.6	9.4	40	0.5-15-39RX	19.5	20.6	24.4
11	0.5-15-110RX	5	6.1	9.9	41	0.5-15-40RX	20	21.1	24.9
12	0.5-15-120RX	5.5	6.6	10.4	42	0.5-15-41RX	20.5	21.6	25.4
13	0.5-15-130RX	6	7.1	10.9	43	0.5-15-42RX	21	22.1	25.9
14	0.5-15-140RX	6.5	7.6	11.4	44	0.5-15-43RX	21.5	22.6	26.4
15	0.5-15-150RX	7	8.1	11.9	45	0.5-15-44RX	22	23.1	26.9
16	0.5-15-160RX	7.5	8.6	12.4	46	0.5-15-45RX	22.5	23.6	27.4
17	0.5-15-170RX	8	9.1	12.9	47	0.5-15-46RX	23	24.1	27.9
18	0.5-15-180RX	8.5	9.6	13.4	48	0.5-15-47RX	23.5	24.6	28.4
19	0.5-15-190RX	9	10.1	13.9	49	0.5-15-48RX	24	25.1	28.9
20	0.5-15-200RX	9.5	10.6	14.4	50	0.5-15-49RX	24.5	25.6	29.4
21	0.5-15-210RX	10	11.1	14.9	51	0.5-15-50RX	25	26.1	29.9
22	0.5-15-220RX	10.5	11.6	15.4	52	0.5-15-51RX	25.5	26.6	30.4
23	0.5-15-230RX	11	12.1	15.9	53	0.5-15-52RX	26	27.1	30.9
24	0.5-15-240RX	11.5	12.6	16.4	54	0.5-15-53RX	26.5	27.6	31.4
25	0.5-15-250RX	12	13.1	16.9	55	0.5-15-54RX	27	28.1	31.9
26	0.5-15-260RX	12.5	13.6	17.4	56	0.5-15-55RX	27.5	28.6	32.4
27	0.5-15-270RX	13	14.1	17.9	57	0.5-15-56RX	28	29.1	32.9
28	0.5-15-280RX	13.5	14.6	18.4	58	0.5-15-57RX	28.5	29.6	33.4
29	0.5-15-290RX	14	15.1	18.9	60	0.5-15-58RX	29.5	30.6	34.4
30	0.5-15-300RX	14.5	15.6	19.4	64	0.5-15-60RX	31.5	32.6	36.4
31	0.5-15-310RX	15	16.1	19.9	68	0.5-15-64RX	33.5	34.6	38.4
32	0.5-15-320RX	15.5	16.6	20.4	80	0.5-15-80RX	38.5	40.6	44.4
33	0.5-15-330RX	16	17.1	20.9					

APPROVED: DATE: TITLE: FPC0.5-80P 下接 翻盖式 镀金

C kmtw CHANKLEMENT INDUSTRYCO., LTD 深圳市科盟实业有限公司

Checked	Date	Drawn	Date	Prod. P/N	Unit	Scale	Free	Rev.	File No.
CHECKED:	DATE:	DRAWN:	DATE:	PROD. P/N	UNIT	SCALE	FREE	REV.	FILE NO.
		LYF	2012-09-21	C3025539	mm			A	F-FPC080P-C330