

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE:±0.05)



NOTES:
MATERIAL
1. Insulator Material: PBT +30%GF(UL94V-0), Grey
2. Contact Material : Brass
3. Contact Plating : Gold flash/Tin Over Ni
④ AWHW xxA-0102-T: 30u" Au/Tin Over Ni
AWHW xxA-0202-T: Gold flash/Tin Over Ni

ELECTRICAL
1. Current Rating : 3AMP
2. Withstand Voltage : 500V AC/Minute
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL
1. Operation Temperature: -40°C to +105°C
2. Packing : Tray packing

Order information:
xx : 06,08,10,12,14,16,18,20,24
26,30,34,40,50,60,64

Dimension antitheses list	
NO. Pin	L
6P-8P	4,00
10P-64P	4,40

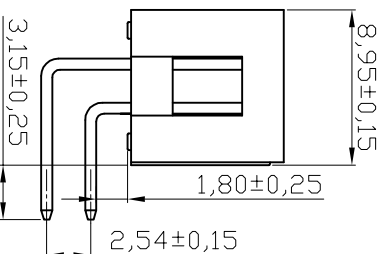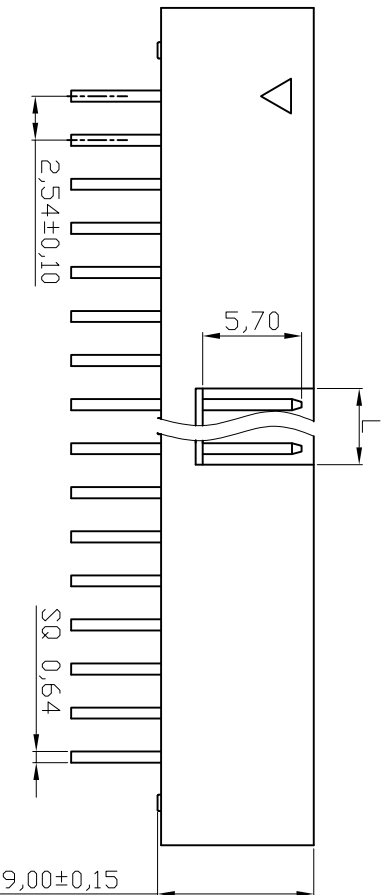

RoHS compliant
Unit: mm



Scale	Free	Date		Name	
TOLERANCE		Drawn	25.01.2006	Approved	Alex
X.X	±0.40				
X.XX	±0.25				
X.XXX	±0.15				
DIM	TOL	Update	29.06.2009		Dean
Angle	±3°	Drawn	25.01.2006		Alex
		Id.		Modification	

ASSMANN
WSW components

Customer-No. ASSMANN WSW-No.
AWHW xxA-0202-T
④ AWHW xxA-0102-T

Drawing-No. ASS 2315 CO rev04

Replace

Sheet

1	2	3	4	5	6	7	
H	G	F	E	D	C	B	A