
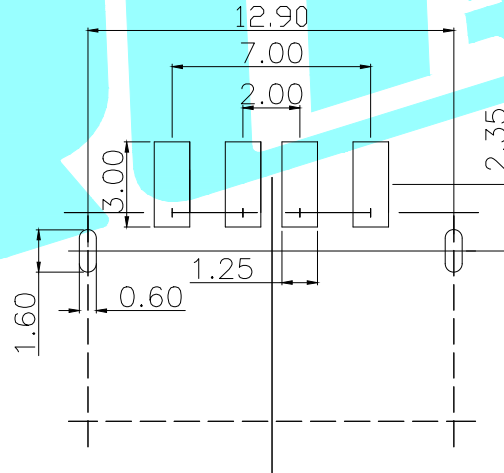


PART NO	H
U-A-24DD-Y-11	6.30
U-A-24DD-Y-12	6.80

规格说明: Specifications:
 电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

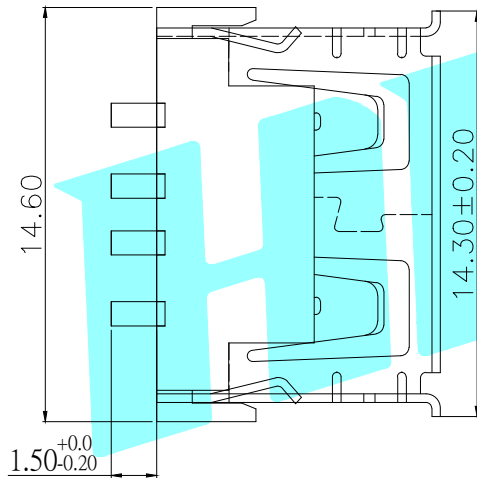

Recommended PCB Layout

③	Base	—	1	NYLON	—	
②	Terminal	—	4	Phosphor Bronze	Ag Plated	
①	Housing	—	1	SPCC	Ni Plated	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 ELECTRONICS CO.,LTD			
DRAWN	xu qi feng	2018/8/1					
CHECKED				TITLE:	USB CONNECTOR		
APPROVALS				PART NO.			
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	
		10~30	±0.25				
		5~10	±0.20				
		~ 5	±0.15				
				±2'	DRAWING NO.	PROJ:	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.