



## OPTICALLY COUPLED BILATERAL SWITCH NON-ZERO CROSSING TRIAC

### APPROVALS

- UL recognised, File No. E91231

### 'X' SPECIFICATION APPROVALS

- VDE 0884 pending

### DESCRIPTION

The IS600\_ series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a light activated silicon bilateral switch performing the functions of a triac mounted in a standard 6 pin dual-in-line package.


### FEATURE

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High Isolation Voltage ( $5.3kV_{RMS}$ ,  $7.5kV_{PK}$ )
- 600V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available


### APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers


#### OPTION SM SURFACE MOUNT



#### OPTION G



#### Dimensions in mm

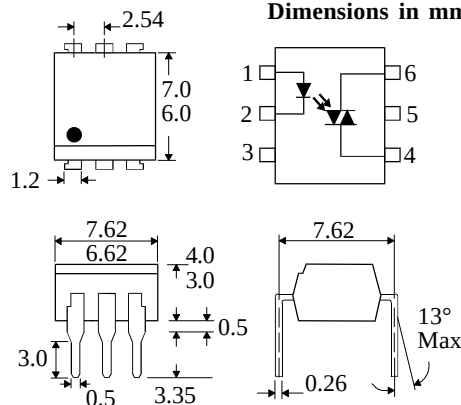

### ABSOLUTE MAXIMUM RATINGS (25 °C unless otherwise noted)

Storage Temperature \_\_\_\_\_ -40°C - +100°C  
Operating Temperature \_\_\_\_\_ -40°C - +85°C  
Lead Soldering Temperature \_\_\_\_\_ 260°C  
(1.6mm from case for 10 seconds)  
Input-to-output Isolation Voltage (Pk) \_\_\_\_\_ 7500 Vac  
(60 Hz , 1sec. duration)

### INPUT DIODE

Forward Current \_\_\_\_\_ 60mA  
Reverse Voltage \_\_\_\_\_ 3V  
Power Dissipation \_\_\_\_\_ 100mW  
(derate linearly 1.33mW/°C above 25°C)

### OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage \_\_\_\_\_ 600V  
RMS Forward Current \_\_\_\_\_ 100mA  
Forward Current (Peak) \_\_\_\_\_ 1.2A  
Power Dissipation \_\_\_\_\_ 300mW  
(derate linearly 4.0mW/°C above 25°C)

### POWER DISSIPATION

Total Power Dissipation \_\_\_\_\_ 330mW  
(derate linearly 4.4mW/°C above 25°C)

#### ISOCOMCOMPONENTSLTD

Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, TS25 1YD England Tel: (01429)863609  
Fax: (01429) 863581 e-mail sales@isocom.co.uk  
<http://www.isocom.com>

#### ISOCOM INC

1024 S. Greenville Ave, Suite 240,  
Allen, TX 75002 USA  
Tel: (214)495-0755 Fax: (214)495-0901  
e-mail info@isocom.com  
<http://www.isocom.com>

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**


| PARAMETER |                                                                                                                                                                                                                                                                                     | MIN          | TYP              | MAX                                 | UNITS                                                            | TEST CONDITION                                                                                                                                                                                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------|-------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input     | Forward Voltage ( $V_F$ )<br>Reverse Current ( $I_R$ )                                                                                                                                                                                                                              |              | 1.2<br>100       | 1.5<br>100                          | V<br>$\mu\text{A}$                                               | $I_F = 10\text{mA}$<br>$V_R = 3\text{V}$                                                                                                                                                                    |
| Output    | Peak Off-state Current ( $I_{\text{DRM}}$ )<br>Peak Blocking Voltage ( $V_{\text{DRM}}$ )<br>On-state Voltage ( $V_{\text{TM}}$ )<br>Critical rate of rise of off-state<br>Voltage ( $dv/dt$ ) ( note 1 )<br>Critical rate of rise of commutating<br>Voltage ( $dv/dt$ ) ( note 1 ) | 600          | 1.5<br>10<br>0.1 | 100<br>3.0                          | nA<br>V<br>V<br>$\text{V}/\mu\text{s}$<br>$\text{V}/\mu\text{s}$ | $V_{\text{DRM}} = 600\text{V}$ ( note 1 )<br>$I_{\text{DRM}} = 100\text{nA}$<br>$I_{\text{TM}} = 100\text{mA}$ ( peak )<br><br>$I_{\text{load}} = 15\text{mA}$ ,<br>$V_{\text{IN}} = 30\text{V}$ ( fig 1. ) |
| Coupled   | Input Current to Trigger ( $I_{\text{FT}}$ )(note 2 )<br>IS6003<br>IS6005<br>IS6010<br>IS6015<br>IS6030<br><br>Holding Current , either direction ( $I_H$ )<br><br>Input to Output Isolation Voltage $V_{\text{ISO}}$                                                               |              |                  | 3<br>5<br>10<br>15<br>30<br><br>100 | mA<br>mA<br>mA<br>mA<br>mA<br><br>$\mu\text{A}$                  | $V_D = 3\text{V}$ ( note 2 )<br><br><br><br><br><br><br>See note 3<br>See note 3                                                                                                                            |
|           |                                                                                                                                                                                                                                                                                     | 5300<br>7500 |                  |                                     | $V_{\text{RMS}}$<br>$V_{\text{PK}}$                              |                                                                                                                                                                                                             |

Note 1. Test voltage must be applied within  $dv/dt$  rating.


Note 2. Guaranteed to trigger at an  $I_F$  value less than or equal to max.  $I_{\text{FT}}$ , recommended  $I_F$  lies between Rated  $I_{\text{FT}}$  and absolute max.  $I_{\text{FT}}$ .

Note 3. Measured with input leads shorted together and output leads shorted together.


**FIGURE 1**

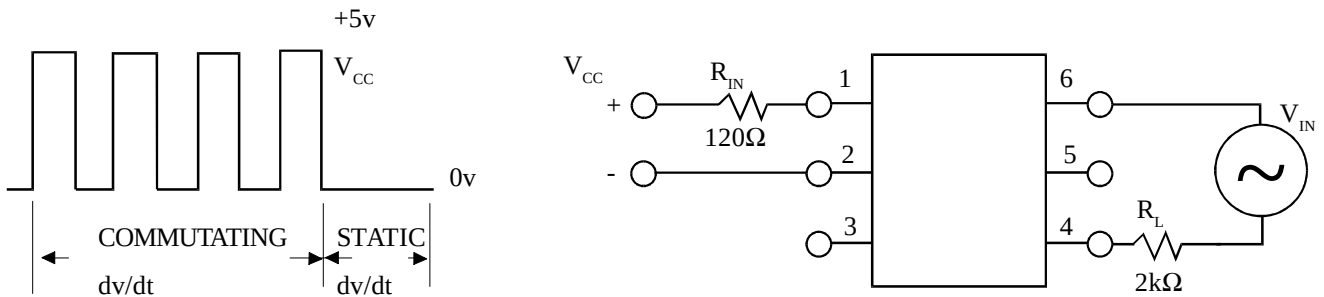


**RMS On-state Current vs. Ambient Temperature**

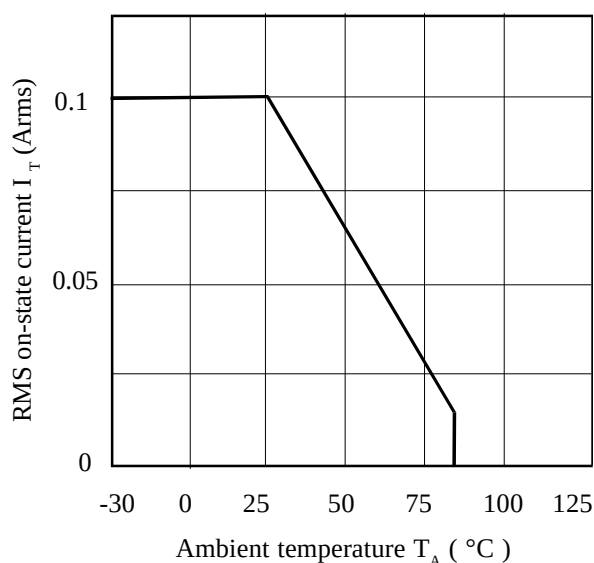


**Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature**

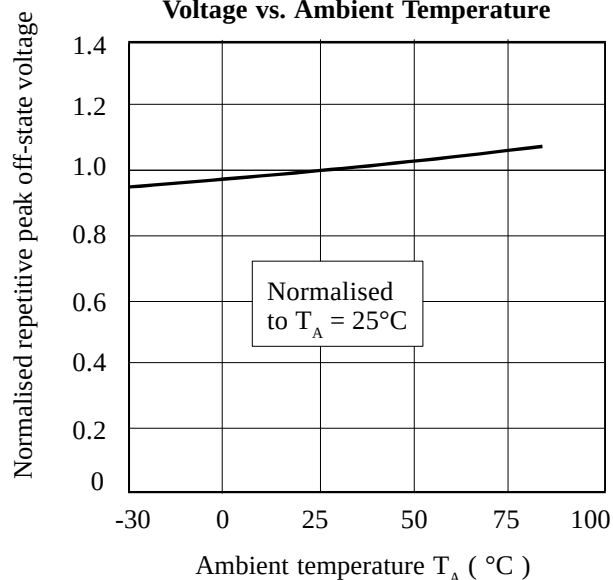


**Forward Current vs. Ambient Temperature**

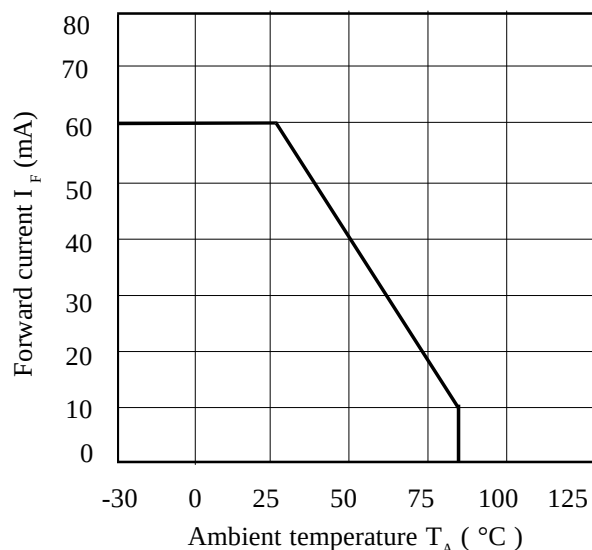

**On-state Voltage vs. Ambient Temperature**

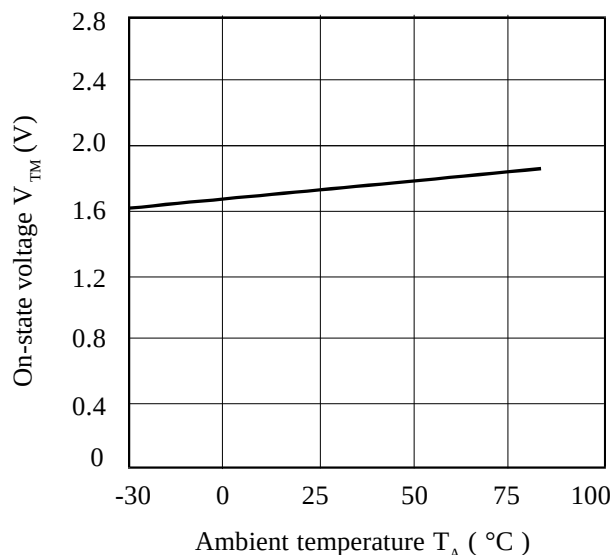

**Normalised Input Trigger Current vs. Ambient Temperature**

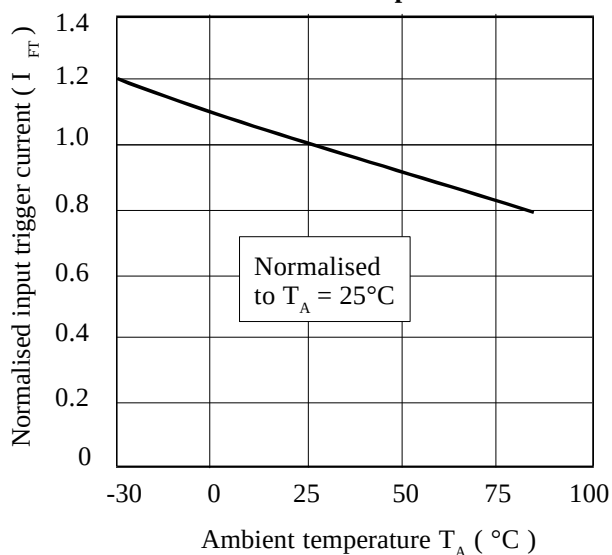

**On-state Current vs. On-state Voltage**

