
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
-	-


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED PER ECO-11-004820	11MAR2011	RK	HMR
	A4	REVISED PER ECR-11-014651	20JUL2011	RK	DD
	A5	REVISED PER ECR-11-016987	5SEP2011	RS	DD

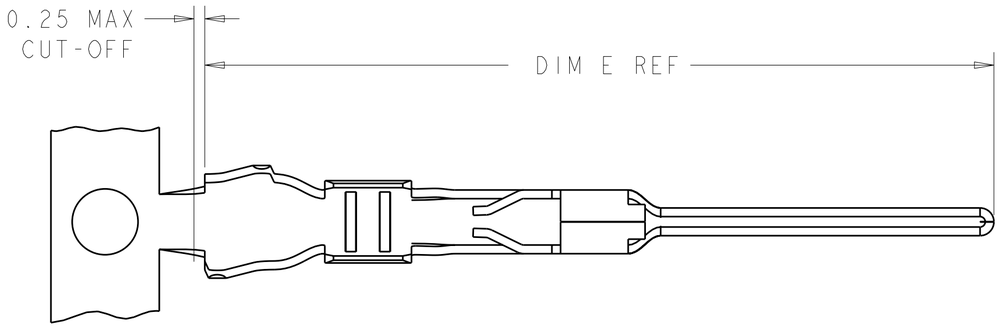


1. BRASS, 0.20 THK. REF
2. NICKEL UNDERPLATE OVER ALL
3. 0.00254 MIN THK BRIGHT TIN ENTIRE CONTACT OVER NICKEL UNDERPLATE
4. 0.00038 THK GOLD STRIPE
5. TE CONNECTIVITY LOGO LOCATED APPROXIMATELY AS SHOWN
6. 0.000762 THK GOLD STRIPE

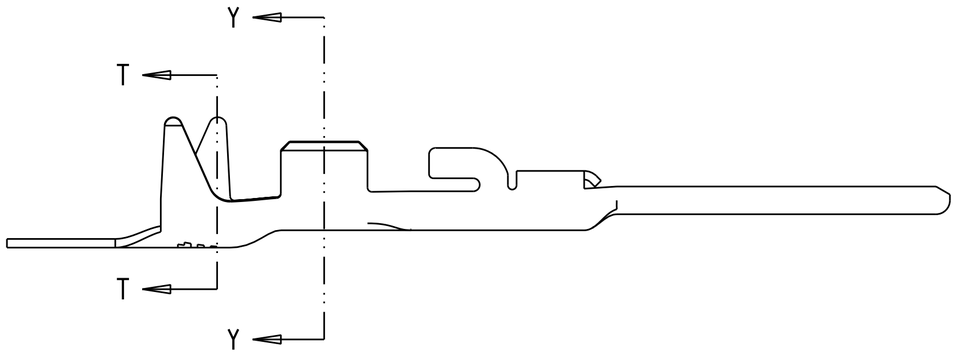


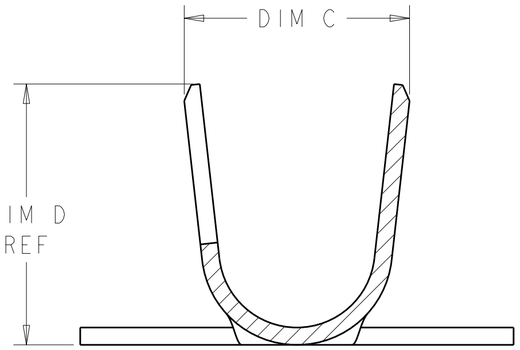


SECTION T-T
SCALE 20:1

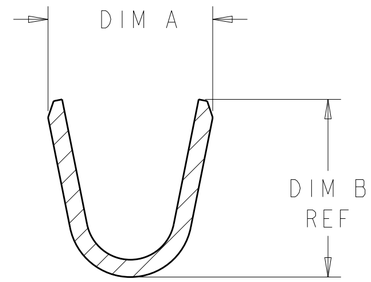

SECTION Y-Y
SCALE 20:1

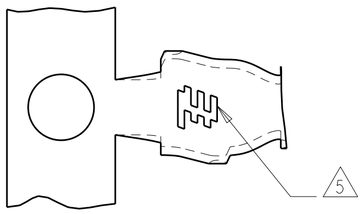

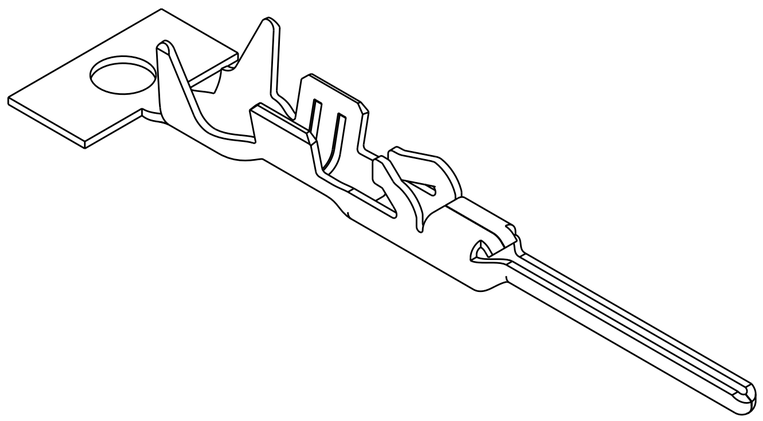

DIM E	DIM D	DIM C	DIM B	DIM A	INSULATION DIA	WIRE RANGE	REMARKS	FINISH	PART NO
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	ON REEL	6	3-2106124-3
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	LOOSE PIECE	2 3	2-2106124-7
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	ON REEL	2 3 4	2-2106124-3
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	ON REEL	2 3	2-2106124-2
18.24	3.01	2.80 2.40	2.05	2.32 1.92	1.70 - 2.10	18-20 AWG	LOOSE PIECE	2 3	2106124-9
18.24	3.01	2.80 2.40	2.05	2.32 1.92	1.70 - 2.10	18-20 AWG	ON REEL	2 3 4	2106124-3
18.24	3.01	2.80 2.40	2.05	2.32 1.92	1.70 - 2.10	18-20 AWG	ON REEL	2 3	2106124-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL 1

FINISH SEE NOTES

DWN R BROWN 05MAR2009
CHK A BUCHER 05MAR2009
APVD -
PRODUCT SPEC 108-2391
APPLICATION SPEC 114-13261
WEIGHT -

TE Connectivity

NAME CONTACT, TAB, CRIMP SNAP-IN SLIM SEAL SSL
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2106124	-

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV A5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
2106124-2