AP1115

0.6A LOW DROPOUT POSITIVE ADJUSTABLE OR FIXED-MODE REGULATOR

Features

- 1.3V Maximum Dropout at Full Load Current
- Fast Transient Response
- Output Current Limiting
- Built-in Thermal Shutdown
- Good Noise Rejection
- 3-Terminal Adjustable or Fixed 1.5V / 1.8V / 2.5V / 2.8V/ 3.0V / 3.3V / 3.5V / 5.0V
- Package: SOT89-3L
- Lead Free Finish/RoHS Compliant for Lead Free products (Note 1)


General Description

AP1115 is a low dropout positive adjustable or fixed mode regulator with 0.6A output current capability. The product is specifically designed to provide well-regulated supply for low voltage IC applications such as high-speed bus termination and low current 3.3V logic supply. AP1115 is also well suited for other applications such as VGA cards. AP1115 is guaranteed to have <1.3V dropout at full load current making it ideal to provide well regulated outputs of 1.25V to 5V with up to 18V input supply.

Applications

- PC Peripheral
- Communication

Ordering Information

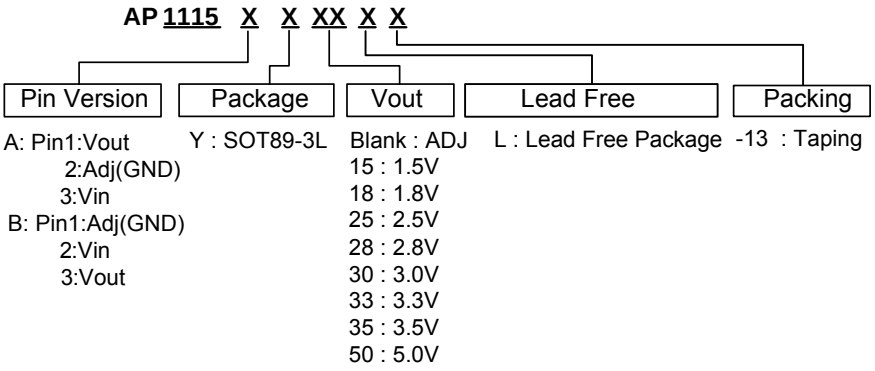

Note: 1. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.


Device	Package Code	Packaging (Note 2)	13" Tape and Reel		Ammo Box		Bulk	
			Quantity	Quantity	Part Number Suffix	Part Number Suffix	Quantity	Part Number Suffix
AP1115XY	Y	SOT89-3L	2500/Tape & Reel	-13	NA	NA	NA	NA

Note: 2. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

© Diodes Incorporated


Connection Diagram (Top View)

AP1115A-3 PIN SOT89-3L

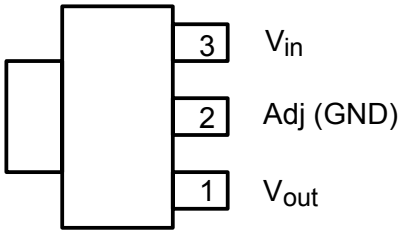

Tab is Pin 2

AP1115B-3 PIN SOT89-3L

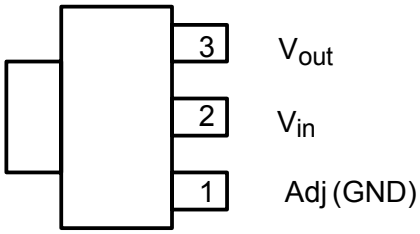


Tab is Pin 2

Pin Descriptions


NAME	I/O	FUNCTION
A_{dj} (GND)	I	A resistor divider from this pin to the V_{out} pin and ground sets the output voltage (Ground only for Fixed-Mode).
V_{out}	O	The output of the regulator. A minimum of 10uF capacitor (0.15Ω ≤ ESR ≤ 20Ω) must be connected from this pin to ground to insure stability.
V_{in}	I	The input pin of regulator. Typically a large storage capacitor (0.15Ω ≤ ESR ≤ 20Ω) is connected from this pin to ground to insure that the input voltage does not sag below the minimum dropout voltage during the load transient response. This pin must always be 1.3V higher than V_{out} in order for the device to regulate properly.

© Diodes Incorporated


Typical Circuit

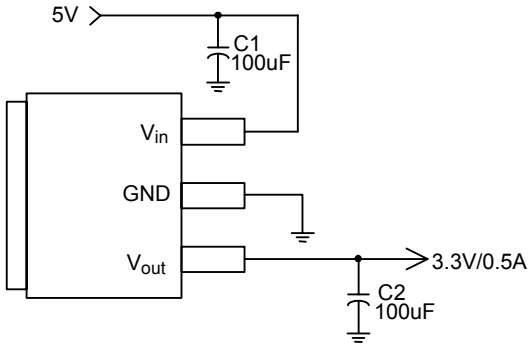


AP1115A (5V/3.3V Fixed Output)

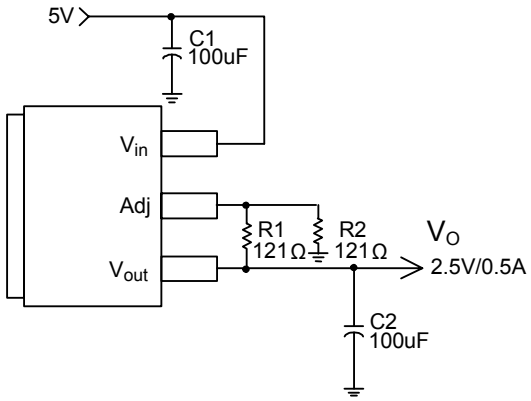

AP1115A (5V/2.5V Adj Output)

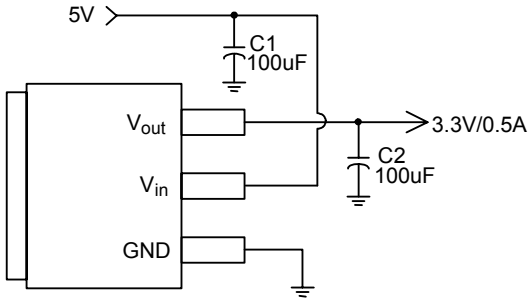

AP1115B (5V/3.3V Fixed Output)

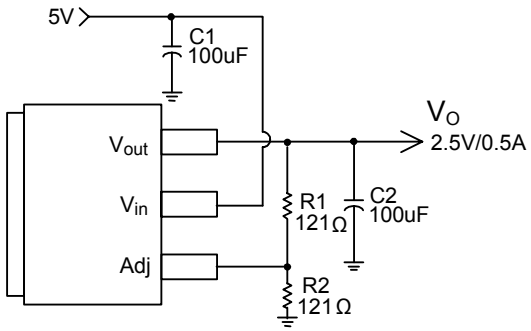

AP1115B (5V/2.5V Adj Output)

$$\text{Note: } V_o = V_{REF} * (1 + \frac{R_2}{R_1})$$

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V_{IN}	DC Supply Voltage	-0.3 to 18 V	V
P_D	Power Dissipation	Internally Limited	
T_{ST}	Storage Temperature	-65 to +150	°C
T_{OP}	Operating Junction Temperature Range	0 to +150	°C

© Diodes Incorporated

Electrical Characteristics (Under Operating Conditions)

PARAMETER	CONDITIONS		MIN.	TYP.	MAX.	UNIT
Reference Voltage	AP1115-ADJ	T_A = 25°C, (V_{IN} - $_{OUT}$) = 1.5V I_O = 10mA	1.225	1.250	1.275	V
Output Voltage	AP1115-1.5	I_{OUT} = 10mA, T_A = 25°C, 3V ≤ V_{IN} ≤ 12V	1.470	1.500	1.530	V
	AP1115-1.8	I_{OUT} = 10mA, T_A = 25°C, 3.3V ≤ V_{IN} ≤ 12V	1.764	1.800	1.836	V
	AP1115-2.5	I_{OUT} = 10mA, T_A = 25°C, 4V ≤ V_{IN} ≤ 12V	2.450	2.500	2.550	V
	AP1115-2.8	I_{OUT} = 10mA, T_A = 25°C, 4.3V ≤ V_{IN} ≤ 12V	2.744	2.800	2.856	V
	AP1115-3.0	I_{OUT} = 10mA, T_A = 25°C, 4.5V ≤ V_{IN} ≤ 12V	2.940	3.000	3.060	V
	AP1115-3.3	I_{OUT} = 10mA, T_A = 25°C, 4.8V≤ V_{IN} ≤ 12V	3.235	3.300	3.365	V
	AP1115-3.5	I_{OUT} = 10mA, T_A = 25 °C, 5V ≤ V_{IN} ≤ 12V	3.430	3.500	3.570	V
	AP1115-5.0	I_{OUT} = 10mA, T_A = 25 °C, 6.5V ≤ V_{IN} ≤ 12V	4.900	5.000	5.100	V
Line Regulation	AP1115-XXX	I_O = 10mA, V_{OUT} + 1.5V < V_{IN} < 15V, T_A = 25°C	-	-	0.2	%
Load Regulation	AP1115-ADJ	V_{IN} = 3.3V, V_{adj} = 0,0mA < Io < 0.6A, T_A = 25°C (Note 3, 4)	-	-	1	%
	AP1115-1.5	V_{IN} = 3V, 0mA < Io < 0.6A, T_A = 25°C (Note 3, 4)	-	12	15	mV
	AP1115-1.8	V_{IN} = 3.3V, 0mA < Io < 0.6A, T_A = 25°C (Note 3, 4)	-	15	18	mV
	AP1115-2.5	V_{IN} = 4V, 0mA < Io < 0.6A, T_A = 25°C (Note 3, 4)	-	20	25	mV
	AP1115-2.8	V_{IN} = 4.3V, 0mA < Io < 0.6A, T_A = 25°C (Note 3, 4)	-	22	28	mV
	AP1115-3.0	V_{IN} = 5V, 0 ≤ I_{OUT} ≤ 0.6A, T_A = 25°C (Note 3, 4)	-	23	30	mV
	AP1115-3.3	V_{IN} = 5V, 0 ≤ I_{OUT} ≤ 0.6A, T_A = 25°C (Note 3, 4)	-	26	33	mV
	AP1115-3.5	V_{IN} = 5V, 0 ≤ I_{OUT} ≤ 0.6A, T_A = 25°C (Note 3, 4)	-	28	35	mV
	AP1115-5.0	V_{IN} = 8V, 0 ≤ I_{OUT} ≤ 0.6A, T_A = 25°C (Note 3, 4)	-	40	50	mV
Dropout Voltage (V_{IN}-V_{OUT})	AP1115-ADJ/1.5/1.8 2.5/2.8/3.0/3.3/3.5/5.0	I_{OUT} = 0.6A, ΔV_{OUT} = 0.1%V_{OUT}	-	1.1	1.3	V
Current Limit	AP1115-ADJ/1.5/1.8 2.5/2.8/3.0/3.3/3.5/5.0	(V_{IN} -V_{OUT}) = 5V	0.7	-	-	A
Minimum Load Current (Note 5)	AP1115-XXX	0°C ≤ T_j ≤ 125°C	-	5	10	mA
Thermal Regulation	T_A = 25 °C, 30ms pulse		-	0.008	0.04	%/W

Note: 3. See thermal regulation specifications for changes in output voltage due to heating effects. Line and load regulation are measured at a constant junction temperature by low duty cycle pulse testing. Load regulation is measured at the output lead = 1/18" from the package.

4. Line and load regulation are guaranteed up to the maximum power dissipation of 5W. Power dissipation is determined by the input/output differential and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range.


5. Quiescent current is defined as the minimum output current required to maintain regulation. At 12V input/output differential the device is guaranteed to regulate if the output current is greater than 10mA.

© Diodes Incorporated

Electrical Characteristics (Continued) (Under Operating Conditions)

PARAMETER	CONDITIONS		MIN.	TYP.	MAX.	UNIT
Ripple Rejection	f = 120Hz,C_{OUT} = 25uF Tantalum, I_{OUT} = 0.6A					
	AP1115-XXX	V_{IN} = V_{OUT}+3V	-	60	70	dB
Temperature Stability	I_O = 10mA		-	0.6	-	%
θ_{JA}	Thermal Resistance Junction-to-Ambient (No heat sink; No air flow)	SOT89-3L	-	300	-	°C/W
θ_{JC}	SOT89-3L: Control Circuitry/Power Transistor Thermal Resistance Junction-to-Case		-	100	-	°C/W

Marking Information

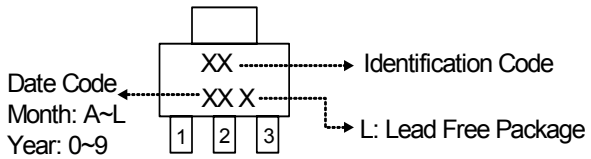


SOT89-3L

Identification Code


Output version	Part Number	
	AP1115A	AP1115B
ADJ	JO	JU
1.5V	JP	JV
1.8V	JQ	JW
2.5V	JR	JX
2.8V	JC	JD
3.0V	JM	JN
3.3V	JS	JY
3.5V	JK	JL
5.0V	JT	JZ

© Diodes Incorporated


Typical Performance Characteristics

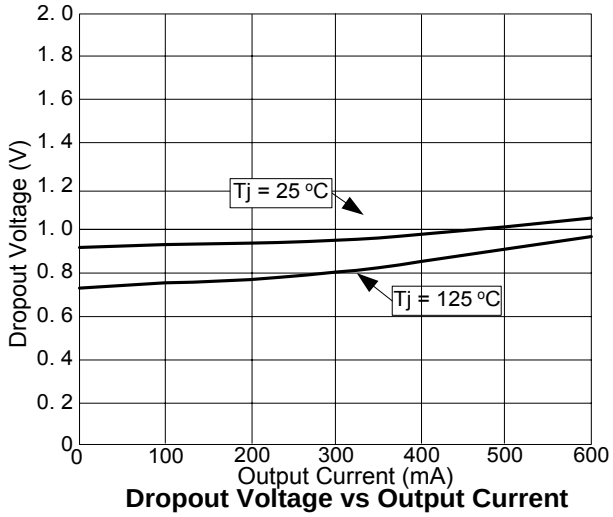


Dropout Voltage vs Output Current

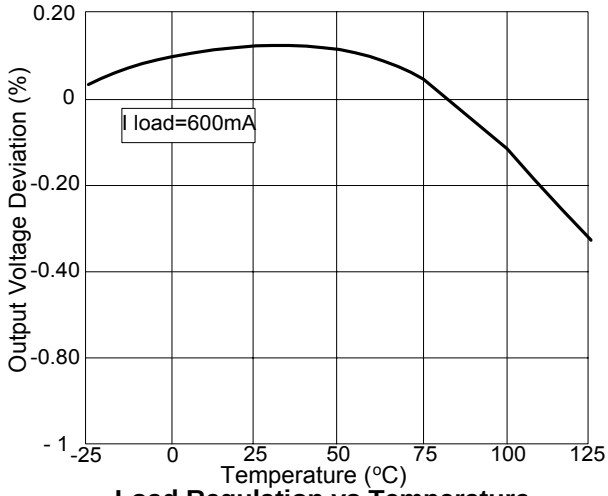


Load Regulation vs Temperature

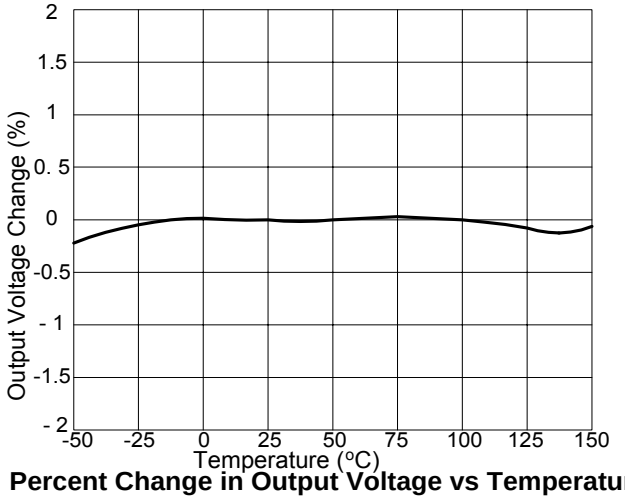


Percent Change in Output Voltage vs Temperature

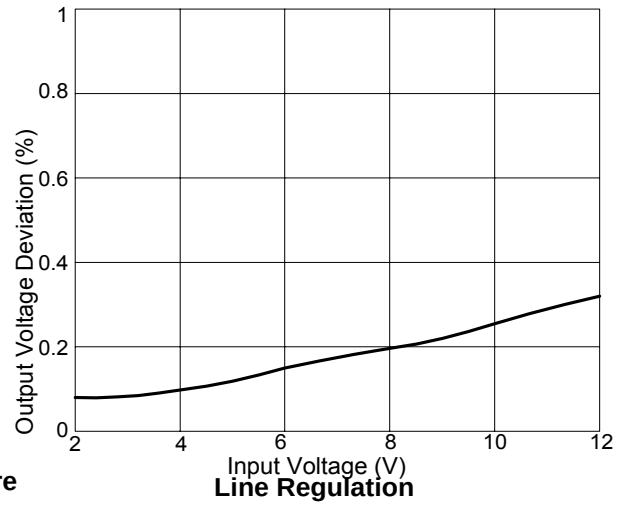

Line Regulation

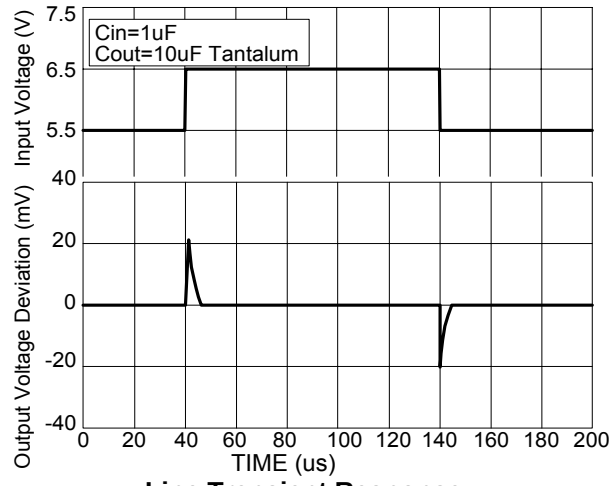

Line Transient Response

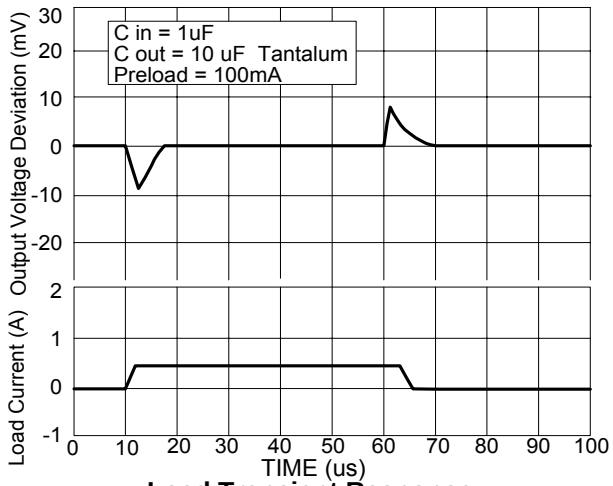


Load Transient Response

© Diodes Incorporated

Package Information

(1) Package Type: SOT89-3L

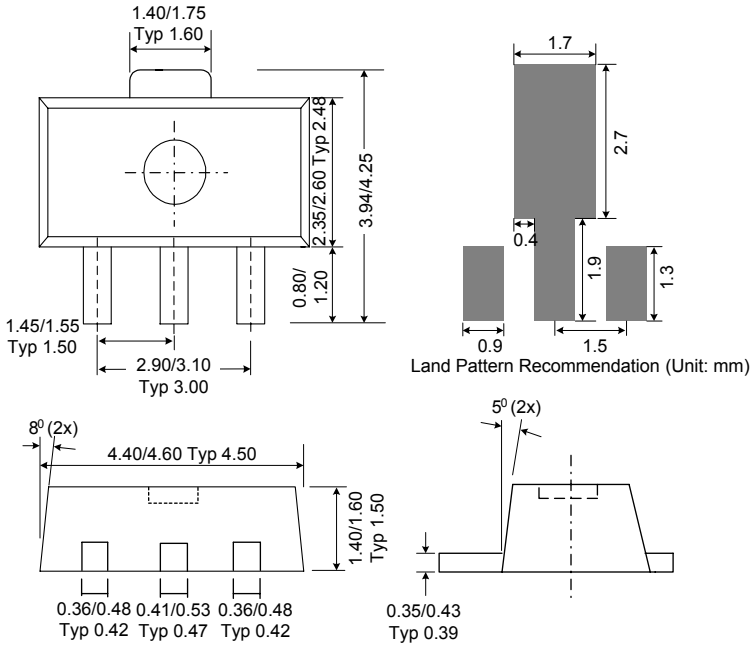

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

© Diodes Incorporated