


## Current Transducer HAS 50 .. 600-S

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic isolation between the primary circuit and the secondary circuit.



$I_{PN} = 50 \dots 600 \text{ A}$



### Electrical data

Type	Primary nominal current rms	Primary current, measuring range <sup>1)</sup>	RoHS since date code
	$I_{PN} \text{ (A)}$	$I_{PM} \text{ (A)}$	
HAS 50-S	50	± 150	45217
HAS 100-S	100	± 300	45325
HAS 200-S	200	± 600	45166
HAS 300-S	300	± 900	45326
HAS 400-S	400	± 900	45333
HAS 500-S	500	± 900	45201
HAS 600-S	600	± 900	45260

$V_C$	Supply voltage (± 5 %) <sup>1)</sup>	± 15	V
$I_C$	Current consumption	± 15	mA
$R_{IS}$	Isolation resistance @ 500 VDC	> 1000	MΩ
$V_{OUT}$	Output voltage (Analog) @ ± $I_{PN}$ , $R_L = 10 \text{ k}\Omega$ , $T_A = 25^\circ\text{C}$	± 4V ± 40	mV
$R_{OUT}$	Output internal resistance approx	100	Ω
$R_L$	Load resistance <sup>2)</sup>	> 1	kΩ

### Accuracy - Dynamic performance data

$X$	Accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$ (excluding offset)	< ± 1	%
$\epsilon_L$	Linearity error <sup>3)</sup> (0 .. ± $I_{PN}$ )	< ± 1	% of $I_{PN}$
$V_{OE}$	Electrical offset voltage, $T_A = 25^\circ\text{C}$	< ± 20	mV
$V_{OH}$	Hysteresis offset voltage @ $I_p = 0$ , after an excursion of $1 \times I_{PN}$	< ± 20	mV
$TCV_{OE}$	Temperature coefficient of $V_{OE}$	HAS 50-S < ± 2 HAS 100 .. 600-S < ± 1	mV/K mV/K
$TCV_{OUT}$	Temperature coefficient of $V_{OUT}$ (% of reading)	< ± 0.1	%/K
$t_r$	Response time to 90 % of $I_{PN}$ step	< 3	μs
$di/dt$	$di/dt$ accurately followed	> 50	A/μs
$BW$	Frequency bandwidth (- 3 dB) <sup>4)</sup>	DC .. 50	kHz

### General data

$T_A$	Ambient operating temperature	- 10 .. + 80	°C
$T_S$	Ambient storage temperature	- 25 .. + 80	°C
$m$	Mass approx	60	g
	Standard	EN 50178: 1997	

**Notes:** <sup>1)</sup> Operating at  $\pm 12 \text{ V} \leq V_C < \pm 15 \text{ V}$  will reduce the measuring range  
<sup>2)</sup> If the customer uses  $1 \text{ k}\Omega$  of the load resistor, the primary current has to be limited as the nominal. To measure the full defined measuring range, the load resistor should be at minimum  $10 \text{ k}\Omega$   
<sup>3)</sup> Linearity data exclude the electrical offset  
<sup>4)</sup> Please refer to derating curves in the technical file to avoid excessive core heating at high frequency.

### Features

- Hall effect measuring principle
- Galvanic isolation between primary and secondary circuit
- Low power consumption
- Extended measuring range ( $3 \times I_{PN}$ )
- Isolated plastic case made of polycarbonate PBT recognized according to UL 94-V0.

### Advantages

- Easy mounting
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.

### Applications

- AC variable speed drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

### Application domain

- Industrial.

## Current Transducer HAS 50 .. 600-S

### Isolation characteristics

$V_d$	Rms voltage for AC insulation test, 50 Hz, 1 min	3.6	kV
$\hat{V}_w$	Impulse withstand voltage 1.2/50 $\mu$ s	> 6.6	kV
		Min	
<b>dCp</b>	Creepage distance	7.08	mm
<b>dCI</b>	Clearance	6.23	mm
<b>CTI</b>	Comparative Tracking Index (group IIIa)	275	

### Applications examples

According to **EN 50178** and **IEC 61010-1** standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
<b>dCp, dCI, <math>\hat{V}_w</math></b>	Rated insulation voltage	Nominal voltage
Basic insulation	600 V	600 V
Reinforced insulation	300 V	300 V

### Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions HAS 50 .. 600-S (in mm)

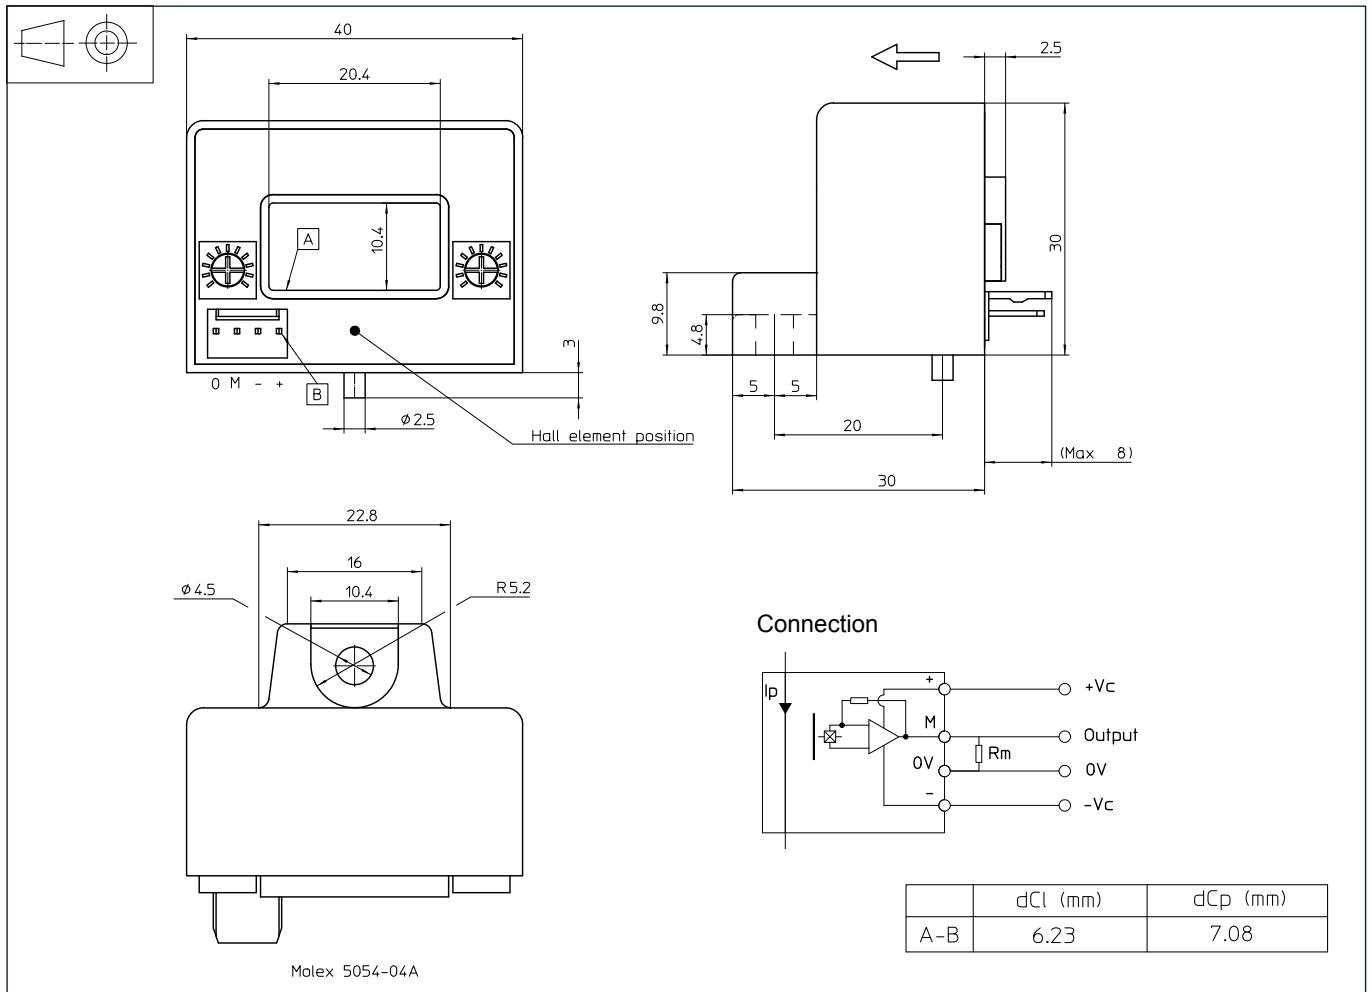

### Mechanical characteristics

- General tolerance  $\pm 0.5$  mm
- Transducer fastening  
1 hole  $\phi 4.5$  mm  
1 M4 steel screw  
Recommended fastening torque 0.75 Nm ( $\pm 10$  %)
- Connection of secondary Molex 5045-04A

### Remarks

- $V_{OUT}$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.