





Tape & Reel packaging (with Pick and Place Cap) 400pcs per reel

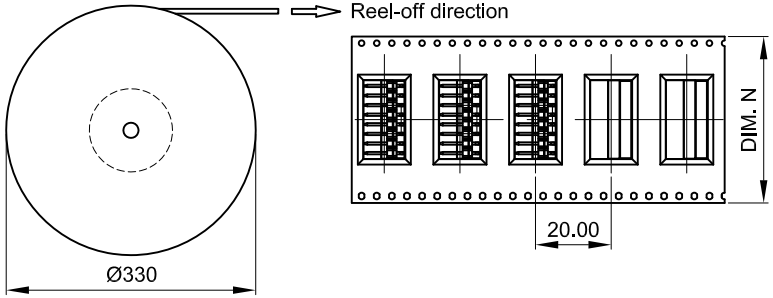

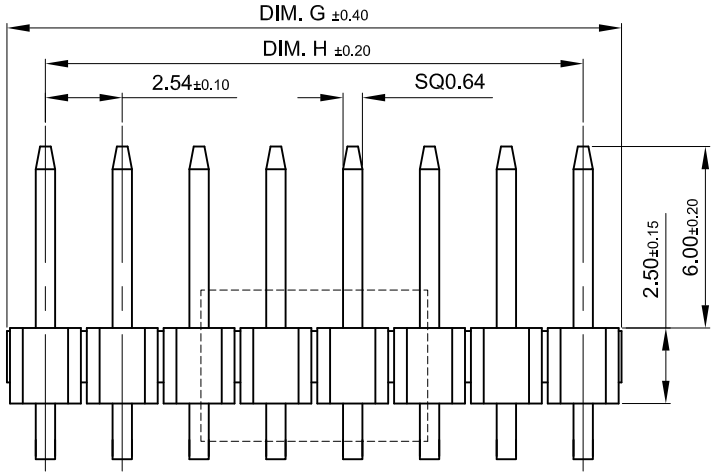

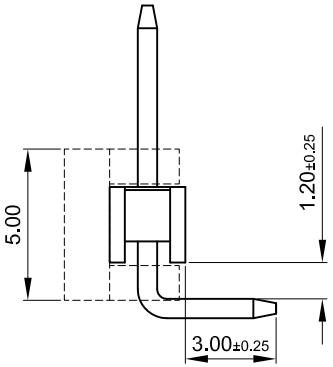

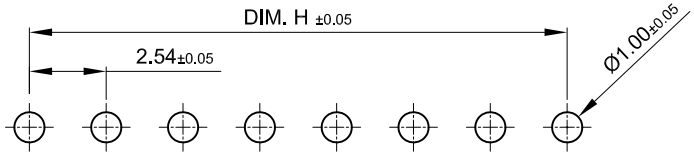

PCB Layout

Notes:

Material and finish:
Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black

Specifications:
Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

Tube Packaging Q'ty

No. of positions	Q'ty per tube
14	16
12	19
10	22
8	28
6	38
4	57
2	114

Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. N
129292	129285	129278	129271	14	35.56	33.02	56
129291	129284	129277	129270	12	30.48	27.94	44
129290	129283	129276	129269	10	25.40	22.86	44
129289	129282	129275	129268	8	20.32	17.78	44
129288	129281	129274	129267	6	15.24	12.70	32
129287	129280	129273	129266	4	10.16	7.62	24
129286	129279	129272	129265	2	5.08	2.54	24

Information:

Tolerances
X. ±0.50 X°. ±10°
X.X ±0.40 X.X° ±5°
X.XX ±0.25 X.XX° ±3°

All Dimensions In mm

Scale 4:1

For further information about I. D. number see manufacturing document

All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using

Subject to modification without prior notice. Drawing will not be updated.

Designation
2.54mm R/A Single Row Header
THR

ERNI Asia Holding
www.erni.com

129264

Rev.		Date	
A		13-08-2013	

129264.DWG