

SHIELDED POWER INDUCTOR

ASPI-0703S



RoHS
Compliant



7.3 x 7.3 x 3.2mm

FEATURES:

- High saturation
- Magnetic shielding
- Very small footprint
- Flat-top for pick and place
- Low resistance to keep power loss minimum

APPLICATIONS:

- Palm-top and laptop
- LCD TV
- Power line DC to DC converters used in hard drive, notebook computer

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	ASPI-0703S-xxx Series
Operating temperature :	-40°C to +85°C
Storage temperature :	25°C, Humidity < 75% RH

Test Conditions

Inductance: 1kHz

Isat: $\Delta L/L$ (initial) \geq -20%


Irms: $\Delta T \leq 40^\circ\text{C}$

PART NUMBER	INDUCTANCE (uH)	Tolerance	DCR (Ω) max	Isat (A) max	Irms (A) max
ASPI-0703S-2R2	2.2	M	0.032	5.00	3.20
ASPI-0703S-100	10	M	0.072	1.68	1.72
ASPI-0703S-120	12	M	0.098	1.52	1.56
ASPI-0703S-150	15	M	0.130	1.33	1.36
ASPI-0703S-180	18	M	0.140	1.20	1.23
ASPI-0703S-220	22	M	0.190	1.07	1.15
ASPI-0703S-270	27	M	0.210	0.96	1.03
ASPI-0703S-330	33	M	0.240	0.91	0.98
ASPI-0703S-390	39	M	0.320	0.77	0.83
ASPI-0703S-470	47	M	0.360	0.76	0.79
ASPI-0703S-560	56	M	0.470	0.68	0.71
ASPI-0703S-680	68	M	0.520	0.61	0.65
ASPI-0703S-820	82	M	0.690	0.57	0.61
ASPI-0703S-101	100	M	0.790	0.50	0.58
ASPI-0703S-121	120	M	0.890	0.49	0.57
ASPI-0703S-151	150	M	1.270	0.43	0.50
ASPI-0703S-181	180	M	1.450	0.39	0.45
ASPI-0703S-221	220	M	1.650	0.35	0.41
ASPI-0703S-271	270	M	2.310	0.32	0.37
ASPI-0703S-331	330	M	2.620	0.28	0.32
ASPI-0703S-391	390	M	2.940	0.26	0.30
ASPI-0703S-471	470	M	4.180	0.24	0.28
ASPI-0703S-561	560	M	4.670	0.22	0.26
ASPI-0703S-681	680	M	5.730	0.19	0.22
ASPI-0703S-821	820	M	6.540	0.18	0.18
ASPI-0703S-102	1000	M	9.440	0.16	0.16

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ASPI-0703S - -

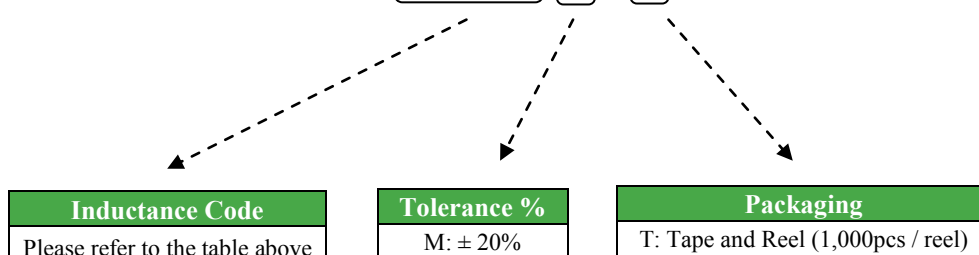

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 04.27.12

