

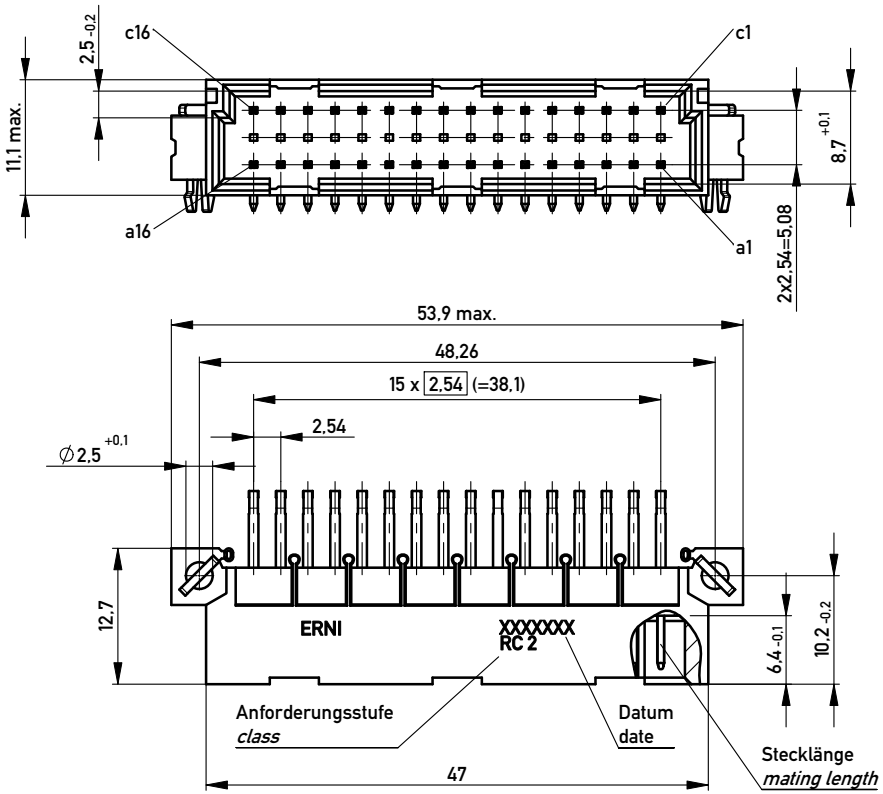


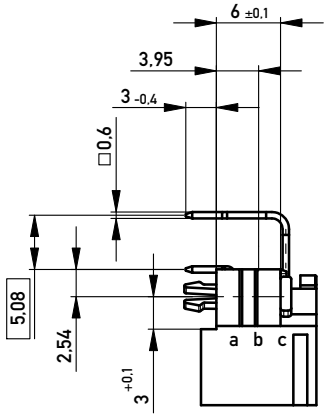


Stecklänge / mating length




E = *early mate, late break* / voreilend

S = standard


L = late mate, early break / nacheilend



Bestückungsplan / *contact layout*

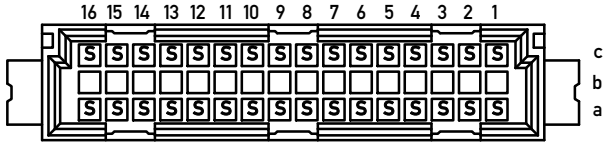

Leiterplatten- Lochbild / PCB drillhole pattern

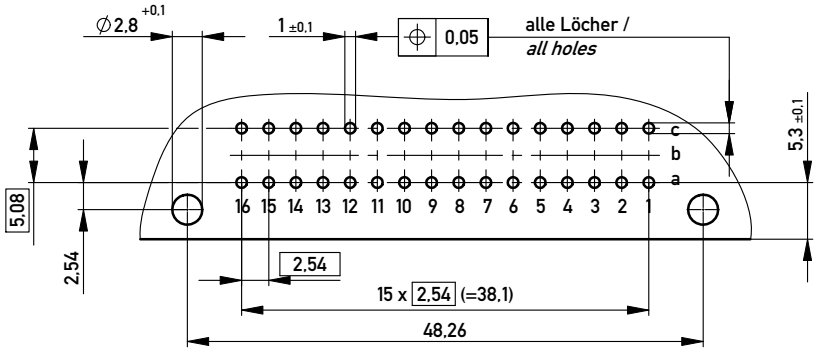

Lötanschluss 0,6x0,6mm */ solder terminal 0,6x0,6mm*
Isolierwerkstoff */ housing material : PBT GF 30*
Bauart 4 / t*ype 4*
Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Berduckung siehe Zeichnung 294905
marking see drawing 294905

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:

Tolerances

All Dimensions in mm

Scale 2:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

Messerleiste C/2 32 Löt+ Clip

Male Con.C/2 32 solder + clip

ERNI www.ERNI.com

384209

I

A3

Index	Date	Class
-	17.08.2009	STVC/2