


MPV3J Series


9x14 mm, 3.3 Volt, PECL/LVDS, VCXO




- Ultra low jitter VCXO approaching SAW jitter performance but with the temperature stability advantage of a crystal based resonator

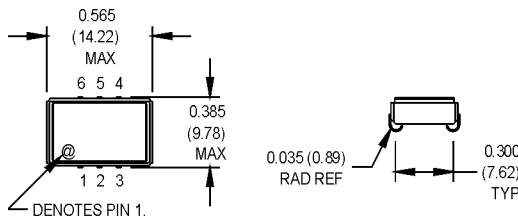

All dimensions in inches (mm).

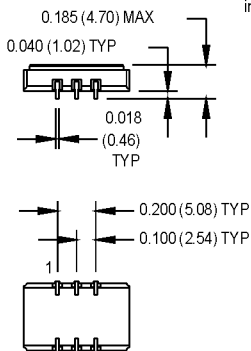

SUGGESTED SOLDER PAD LAYOUT



Pin Connections

PIN	FUNCTION
1	Control Voltage
2	Output Enable or N/C
3	Ground/Case
4	Output Q
5	Output Q or N/C
6	+Vcc

Ordering Information								00.0000	MHz
MPV3J	1	0	B	1	P	J	-R		
Product Series									
Temperature Range									
1: 0°C to +70°C		2: -40°C to +85°C							
6: -20°C to +70°C		8: 0°C to +50°C							
Stability									
0: Nominal per APR selection									
Output Type									
B: Complementary, Enable (Enable High)									
S: Complementary, Enable (Enable Low)									
U: Complementary Output									
Absolute Pull Range									
1: ±50 ppm (±35 ppm typ. Stability)									
8: ±25 ppm (±50 ppm typ. Stability)									
*Symmetry/Output Logic Type									
P: 45/55% PECL					Q: 40/60% PECL				
Package/Lead Configurations									
J: J-lead									
RoHS Compliance									
Blank: non-RoHS compliant part									
-R: RoHS compliant part									
Frequency (customer specified)									

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	30		800	MHz	See Note 1
Operating Temperature	T _A	(See Ordering Information)				
Storage Temperature	T _S	-55		+125	°C	
Frequency Stability	ΔF/F	(See Ordering Information)				
Aging						See Note 2
1st Year		-3/-5		+3/+5	ppm	< 52 MHz / ≥ 52 MHz
Thereafter (per year)		-1/-2		+1/+2	ppm	< 52 MHz / ≥ 52 MHz
Pullability/APR		(See Ordering Information)				
Control Voltage	V _c	0	1.65	3.3	V	Pin 1 Voltage
Linearity			5	10	%	Positive Monotonic Slope
Modulation Bandwidth	f _m	10			kHz	-3 dB bandwidth
Input Impedance	Z _{in}	50k			Ohms	
Input Voltage	V _{cc}	3.135	3.3	3.465	V	
Input Current	I _{cc}		60	70	mA	
Output Type						PECL/LVDS
Load						See Note 4
Symmetry (Duty Cycle)						V _{cc} - 1.3 VDC
Output Skew				200	ps	
Differential Voltage	V _o	250	350	450	mV	LVDS
Logic "1" Level	V _{oh}	V _{cc} - 1.02			V	PECL
Logic "0" Level	V _{ol}			V _{cc} - 1.63	V	PECL
Rise/Fall Time	Tr/Tf		0.35	0.55	ns	@ 20/80% LVPECL
			0.50	1.0	Ns	@ 20/80% LVDS
Enable/Disable Logic		80% V _{cc} min or N/C: output active				Output Option B
		20% V _{cc} max: output disables to high-Z				
		PECL low, GND, or N/C - output active				Output Option S
		PECL high - output disables to high-Z				
Start up Time			5		ms	
Phase Jitter	Φ _J					
@ 155.52 MHz			0.3	0.55	ps RMS	Integrated 12 kHz - 20 MHz
@ 622.08 MHz			0.25	0.5	ps RMS	Integrated 12 kHz - 20 MHz
Phase Noise (Typical)						Offset from carrier
@ 155.52 MHz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	dBc/Hz
	-50	-80	-115	-135	-140	

Note 1: Consult factory for exact frequency availability

Note 2: Stability given for deviation over temperature

Note 3: APR specification inclusive of initial tolerance, deviation over temperature, shock, vibration, supply voltage, and aging

Note 4: PECL load - see load circuit diagram #5. LVDS load - see load circuit diagram #9.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

Revision: 7-27-06