


© 2019 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	ADDED 1-2, 1-3 ECO-06-002610	15FEB2006	SW	SH
	P1	REVISED PER ECO-09-025699	12DEC2009	KK	AEG
	R	REVISED PER ECO-19-011232	07AUG2019	RS	MZ

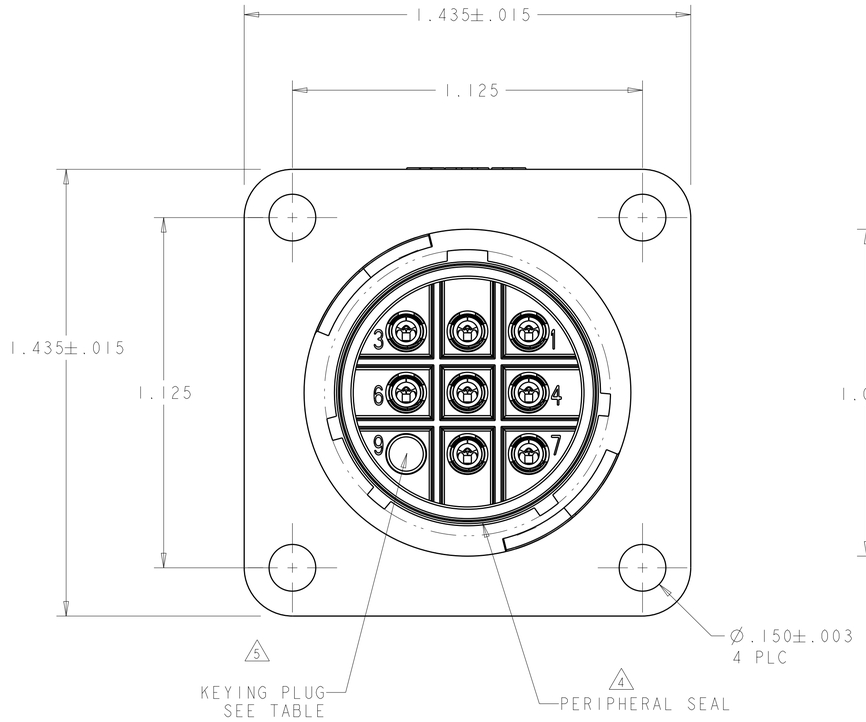


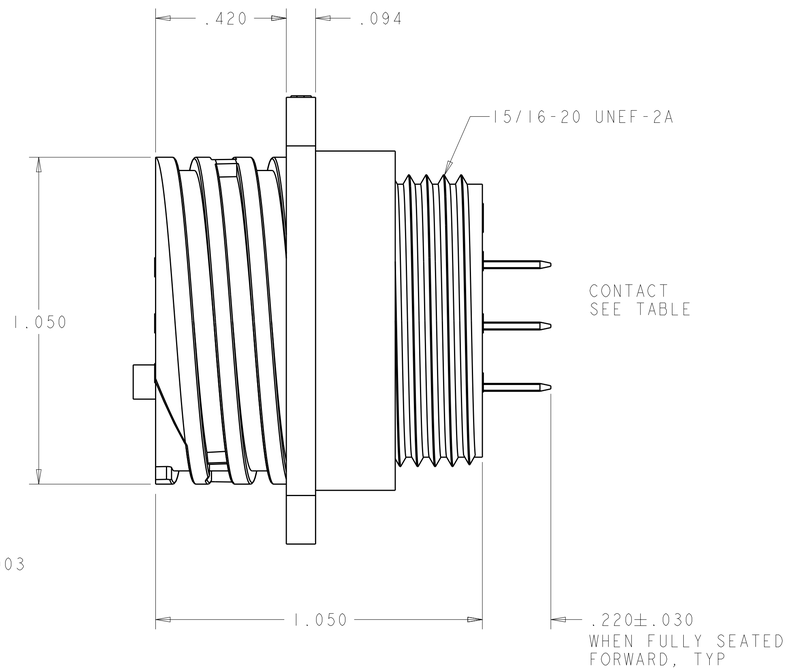

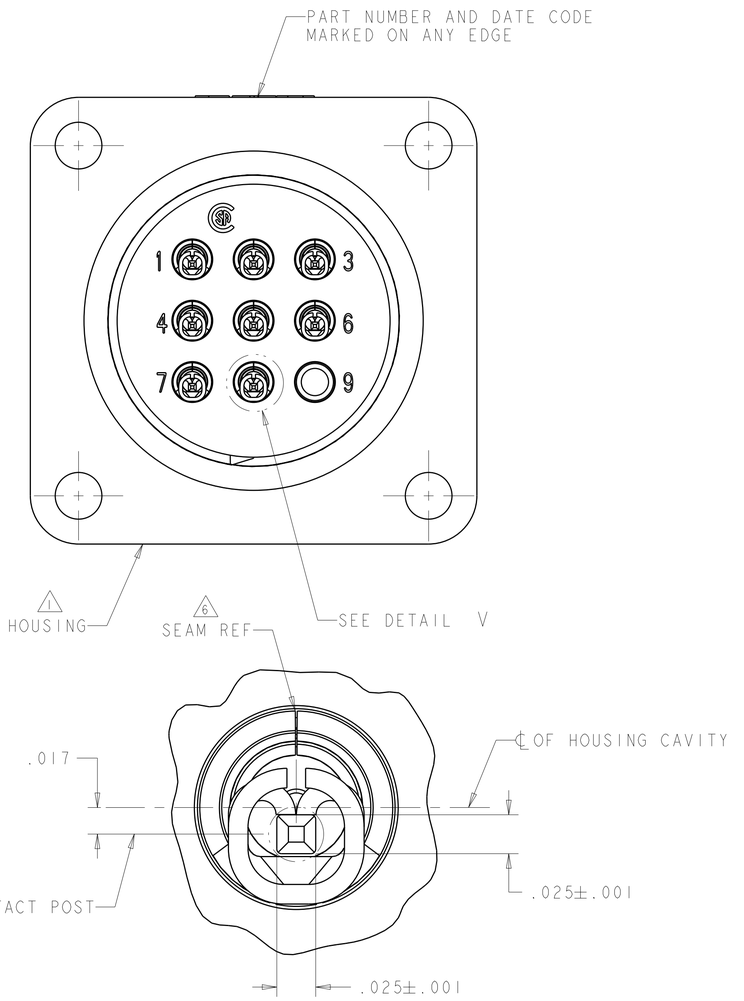


DETAIL V
SCALE 20:1

1. HOUSING: NYLON, UL 94 V-0 RATED, BLACK.
2. CONTACT:
   BODY - BRASS, .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
   POST - BRASS, .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
3. CONTACT:
   BODY - BRASS, .000100 MIN TIN OVER .000050 MIN NICKEL.
   POST - BRASS, .000100 MIN TIN OVER .000050 MIN NICKEL.
4. PERIPHERAL SEAL: ELASTOMER, BLACK.
5. KEYING PLUG: NYLON, NATURAL.
6. .009 MAXIMUM CONTACT LEAD-IN SEAM GAP PERMISSIBLE ON MATING FACE END.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

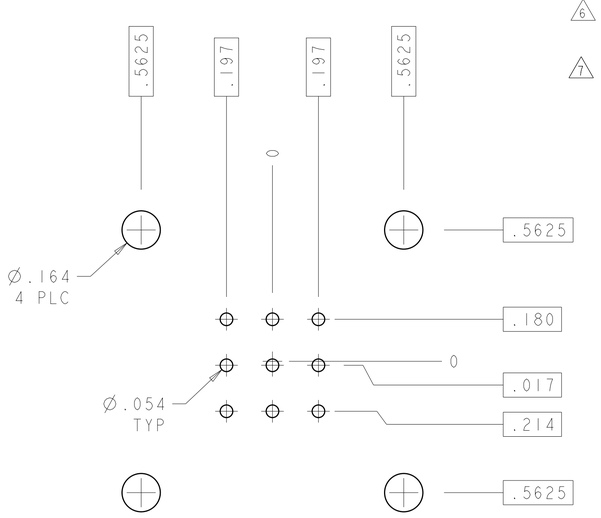

RECOMMENDED PC BOARD LAYOUT
SCALE 3:1

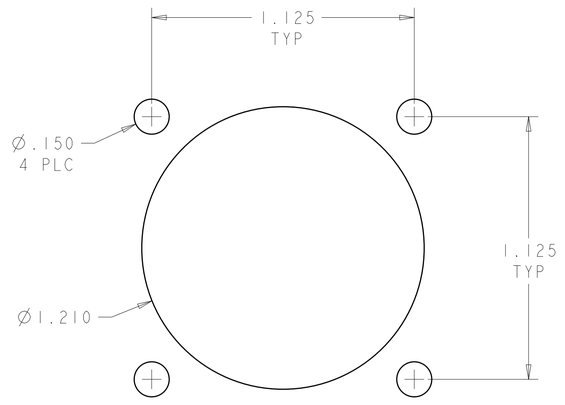

RECOMMENDED PANEL LAYOUT
.125 MAX PANEL THICKNESS
SCALE 3:1

KEYING PLUG	PERIPHERAL SEAL	FINISH	QTY	SELECT LOAD IN POSITIONS	PART NUMBER
		CONTACTS			
POSN 9	YES	3	8	1-8	1-213826-3
-	YES	3	8	1-5,7-9	1-213826-2
-	YES	3	9	ALL	1-213826-1
POSN 9	YES	3	8	1-8	1-213826-0
-	YES	3	8	1-5,7-9	213826-9
POSN 9	YES	2	8	1-8	213826-8
-	YES	2	8	1-5,7-9	213826-7
POSN 9	YES	2	8	1-8	213826-3
-	YES	2	8	1-5,7-9	213826-2
-	YES	2	9	ALL	213826-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.0
2 PLC ±0.00
3 PLC ±0.010
4 PLC ±0.0000
ANGLES ±-
MATERIAL - -
FINISH - -

DWN S.WELDON 23MAY2003
CHK S.HEADER 23MAY2003
APVD S.HEADER 23MAY2003
PRODUCT SPEC 108-10024
APPLICATION SPEC 114-10004
WEIGHT -

TE Connectivity

NAME RECEPTACLE ASSEMBLY, POSTED, REVERSE SEX, SERIES 1, 17-9, CPC
-

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-213826 | RESTRICTED TO

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV R

4805 (3/13)