

SHEET 1 OF 1

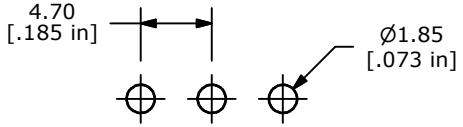


P.C. MOUNTING

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	OPEN	2-1



CIRCUIT: SPDT

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) MAX. @20V MAX.
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2011/65/EU (ROHS) COMPLIANT

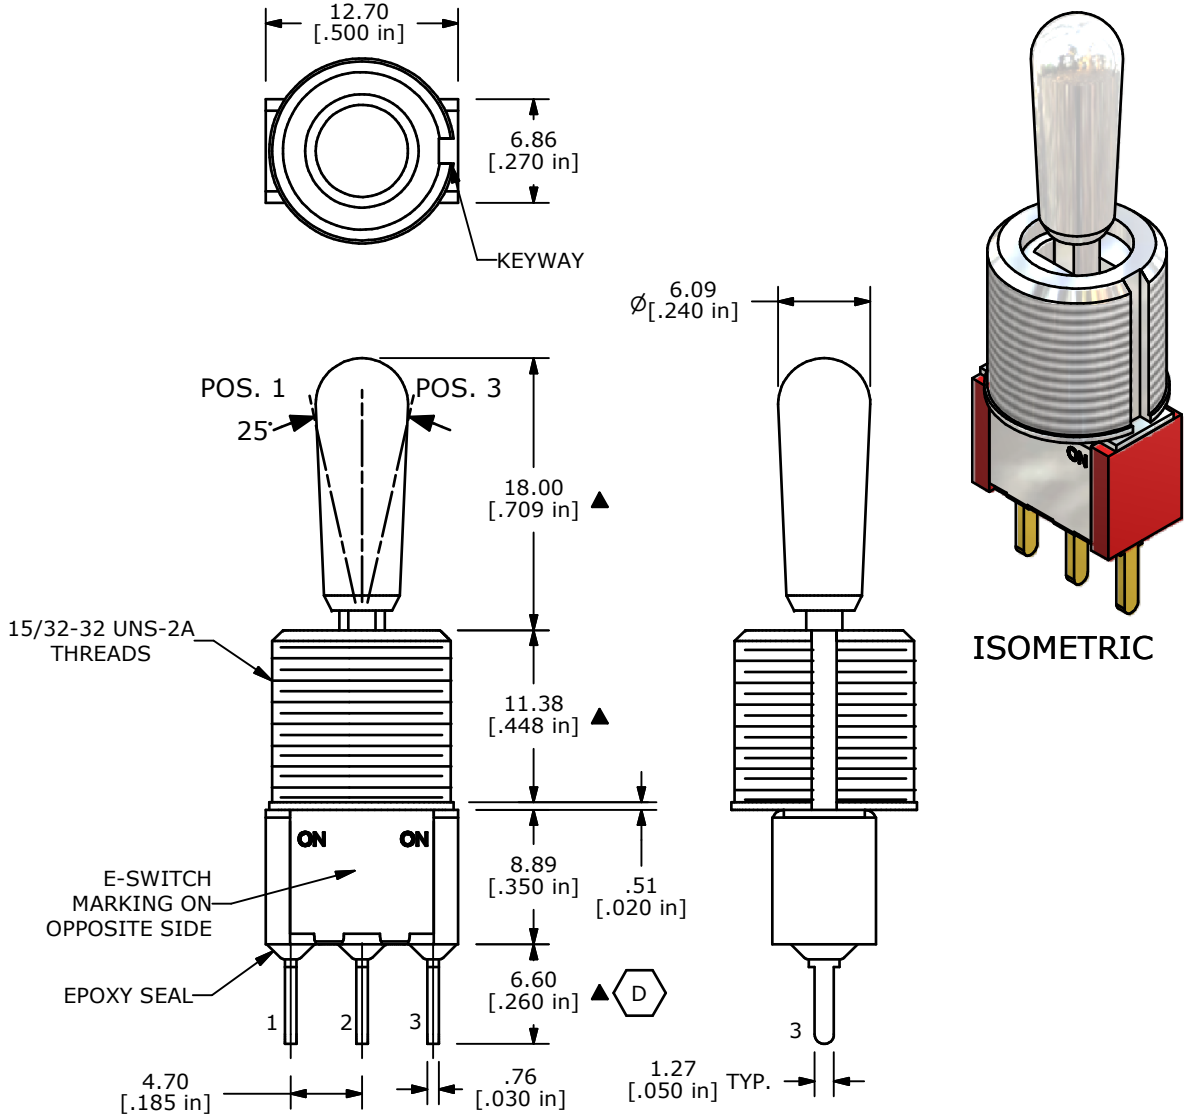

ISOMETRIC

REV	PCR NO	DESCRIPTION	DATE	BY
D	20814	6.60 WAS 6.35	10/9/12	EBP
C	17035	UPDATED NOTES, CLEAN DRAWING	2/23/2007	TN
B	14481	REVISED AND REDRAWN	11/10/04	AR
A		RELEASED FOR PRODUCTION	5/14/98	MM

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100SP1T8B13M2RE

SCALE	DATE	DR	DWG	REV
2:1	2/23/2007	TN	T111087	D