
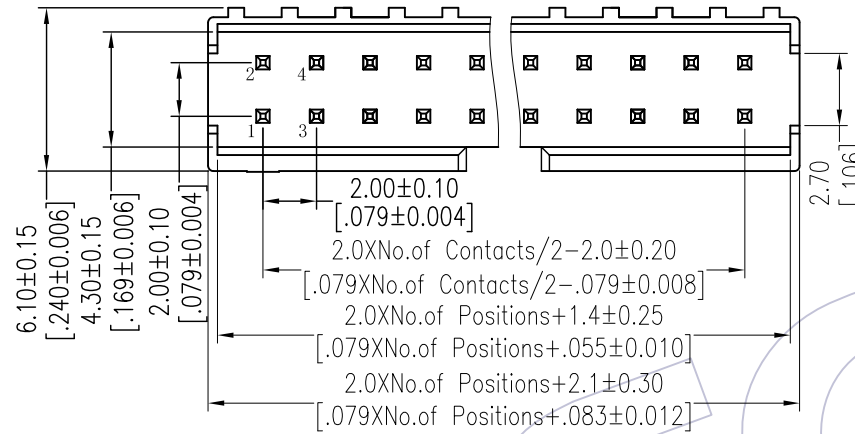


HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0
 LCP+30%G.F UL94V-0
 6P-64P With Slot "E" Δ



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

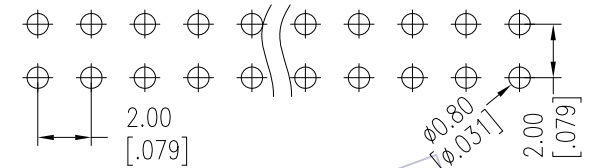

Ordering Information

3122-XX S XX B K00 X X

| No. of Pins | Contact Plating | Color Insulator | Packing |
|----------------|-------------------|-----------------|---------|
| Δ 06 26 | G0=Gold Flash | B=Black | T=Tube |
| 08 28 | G3=10u"Gold | W=White | |
| 10 30 | G4=15u"Gold | | |
| 12 34 | G5=30u"Gold | | |
| 14 36 | S0=Gold Flash/Tin | | |
| 16 40 | S3=10u"Gold/Tin | | |
| 18 44 | S4=15u"Gold/Tin | | |
| 20 50 | S5=30u"Gold/Tin | | |
| 22 60 | SN=Tin | | |
| 24 64 | | | |

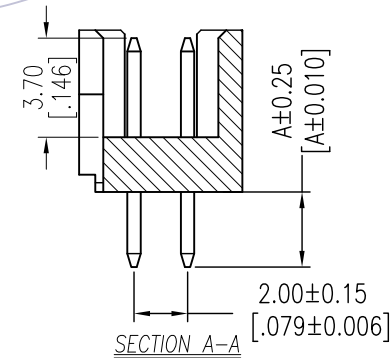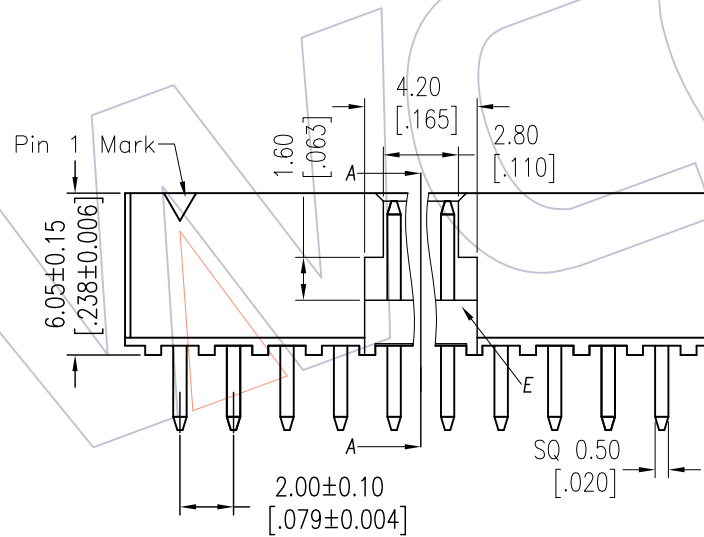

| Item | Pitch | Mating | Dip(A) |
|-----------|-------|--------|--------|
| Standard | 2.00 | 5224 | 2.80 |
| Alternate | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--------------------------|----------|-------------|---------|------------|-------|-----|---|
| A1 | 2017/05/12 | Modify drawing | Δ | x.X ±0.40 | Ding | 2017/05/12 | UNIT | mm | 3122-XXSXXBK00XX |
| AO | 2012/09/24 | NEW | ----- | x.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: 2.00 BOX HEADER 180° H=6.10 "F" TYPE |
| | | | | x.XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 | Customer NO. |
| | | | | Angle ± 3' | | | PROJ. | | |
| | | | | DIM TOL | | | | | |

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com