


used for: DIN EN 60603 TYPE "R"

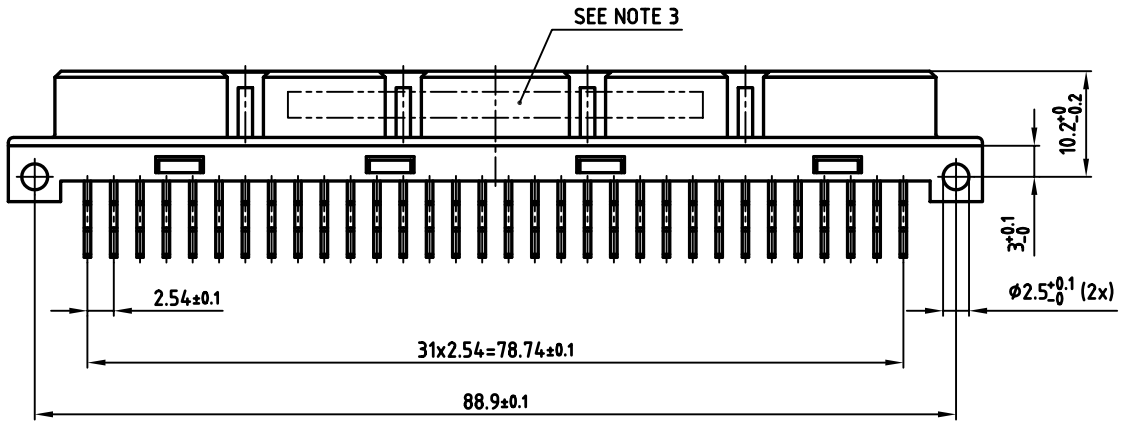

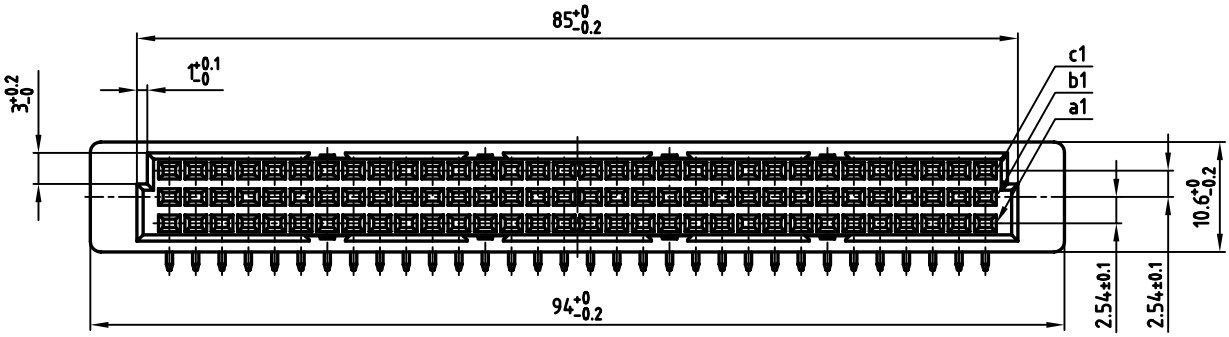

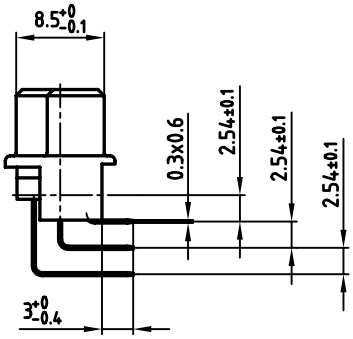


Directive 2002/95/EC „RoHS" Compliant

NOTES:

1. INSULATOR: PBTP UL 94 V-0; GREY
2. CONTACTS: COPPER ALLOY
   PLATING: GOLD OVER NICKEL
   50 MATING CYCLES
4. CONNECTOR IS PART MARKED: 122A10859X CONEC ABC

P.C.B. HOLE DRILLINGS

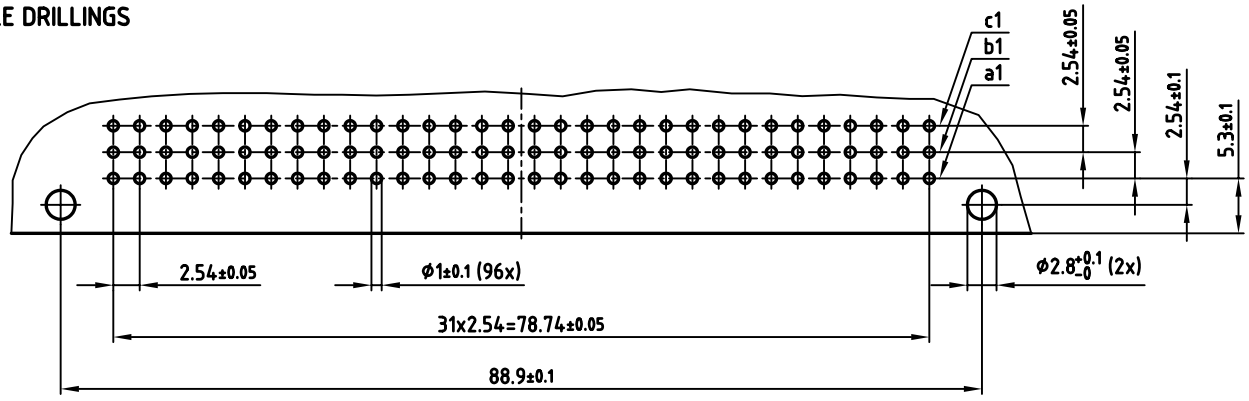

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance

dim. in mm

	date	name
2006		
drawn	26.01.	Lehmenkühler
appd.	27.01.	Mickenbecker
norm	DIN EN 60603	
d-old		

scale: 2:1

material: SEE NOTES

title:

FEMALE CONNECTOR TYPE "R"

96pos. ANGLED

dwg no: 12K1A417

AutoCAD 2004 | DIN-A 3 | sh: 1/1

part no: 122A10859X