

42 V Input Power Management IC with Window Voltage Detector for Automotive Applications

No.EC-500-200911

OVERVIEW

The R5116x is a Power Management IC designed for automotive applications, featuring input voltage range from 3.5 V to 42 V. The IC contains combined 500 mA Voltage Regulator and Window Voltage Detector in a single chip.

KEY BENEFITS

- Reducing components and improving functional safety
- High accuracy of the output voltage and the detector threshold: -1.25 % to 0.75 %
- Preventing the false detection of transient characteristic fluctuations by high-speed response Voltage Regulator

KEY SPECIFICATIONS

- Input Voltage Range (Max. Rating):
3.5 V to 42.0 V (50.0 V)
- Supply Current: Typ. 25 μ A


Voltage Regulator (VR)

- Output Voltage Range: 3.3 V to 5.0 V
- Output Voltage Accuracy: -1.25 % to 0.75 %
(-40°C \leq Ta \leq 125°C)
- Output Current: 500 mA
- Protection:
Thermal shutdown (Detection Temp. Typ.175 °C)
Output current (Typ.750 mA)
Output short-circuit (Typ.105 mA)

Voltage Detector (VD)

- Overvoltage (OV) Detector Threshold :
3.3 V to 5.5 V (in 0.01V step)
- Undervoltage (UV) Detector Threshold :
2.5 V to 5.0 V (in 0.01V step)
- Detector Threshold Accuracy:
-1.25% to 0.75% (-40°C \leq Ta \leq 125°C)
- Release hysteresis: max 0.7%

PACKAGES




HSOP-8E
5.20 x 6.20 x 1.45 (mm)

APPLICATIONS

- Power supply system with microprocessor devices for In-Vehicle electrical equipment
- Power supply system for electronic control units such as EV inverter and battery charge control unit

TYPICAL APPLICATIONS

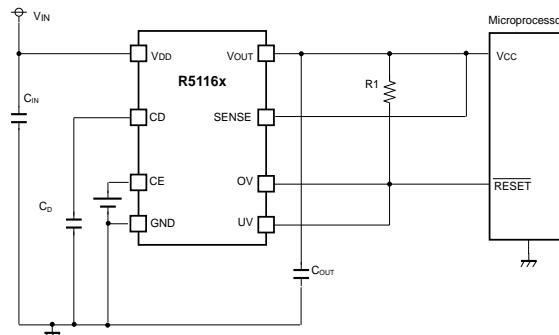

- C_{IN}: 1.0 μ F, C_{OUT}: 10 μ F, Ceramic capacitors
- C_D: Ceramic capacitors for setting detection delay time

SELECTION GUIDE

Product Name	Package	Quantity per Reel
R5116SxxxA-E2-#E	HSOP-8E	1,000 pcs

xxx: Specify the set output voltage for VR (V_{VRSET}), the set OV detector threshold (V_{OVSET}) and the set UV detector threshold (V_{UVSET}) by using serial numbers starting from 001

Refer to ELECTRICAL CHARACTERISTICS for detail information.

R5116x

No.EC-500-200911

SELECTION GUIDE

The set output voltages and the quality class are user-selectable options.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R5116SxxxA-E2-#E	HSOP-8E	1,000 pcs	Yes	Yes

xxx: Specify the set output voltage for VR (V_{VRSET}), the set OV detector threshold (V_{OVSET}) and the UV detector threshold (V_{UVSET}) by using serial numbers starting from 001⁽¹⁾
Refer to ELECTRICAL CHARACTERISTICS for detail information


#: Select the quality class

	Operating Temperature Range	Test Temperature
A	-40°C to 125°C	25°C, High
K	-40°C to 125°C	Low, 25°C, High

⁽¹⁾ The combinations of V_{VRSET} , V_{OVSET} and V_{UVSET} are following conditions;


- $V_{VRSET} = 3.3 \text{ V to } 5.0 \text{ V}$
 - $V_{OVSET} = 3.3 \text{ V to } 5.5 \text{ V}$
 - $V_{UVSET} = 2.5 \text{ V to } 5.0 \text{ V}$
-

BLOCK DIAGRAM

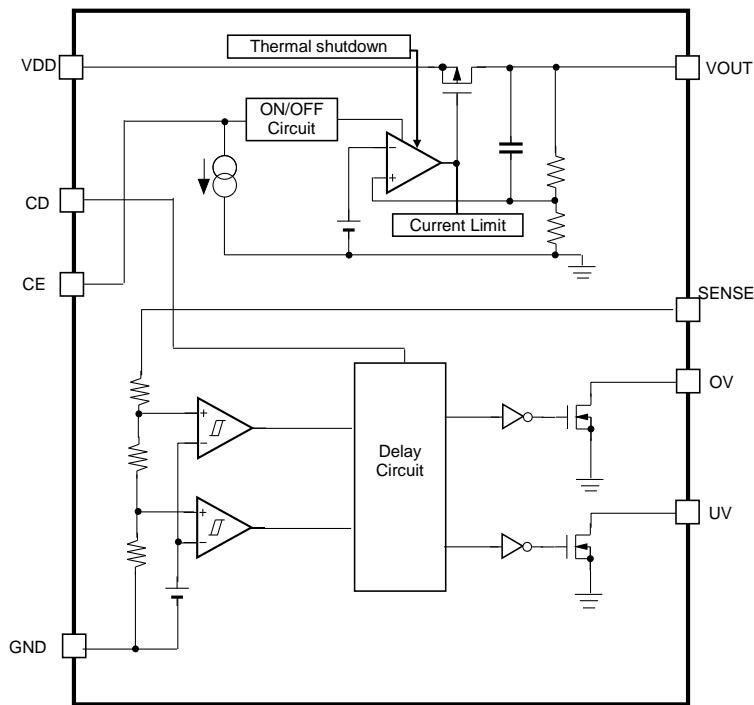

R5116xxx Block Diagram

PIN DESCRIPTIONS






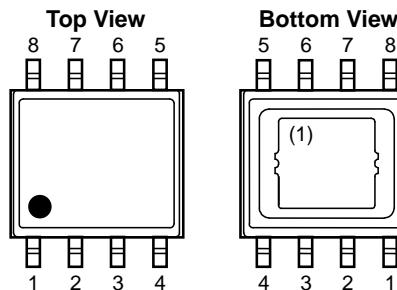


R5116S (HSOP-8E) Pin Configuration

R5116S (HSOP-8E)

Pin No.	Symbol	Description
1	VDD	Supply Voltage Pin
2	CD	Pin for setting VD Release Output Delay Time (power-on reset time)
3	CE	Chip Enable Pin (Active-high)
4	GND	Ground Pin
5	UV	UV Detection Output Pin ("Low" at detection)
6	OV	OV Detection Output Pin ("Low" at detection)
7	SENSE	SENSE Pin
8	VOUT	Regulator Output Pin

(1) The tab on the bottom of the package is substrate level (GND). It is recommended that the tab be connected to the ground plane on the board.

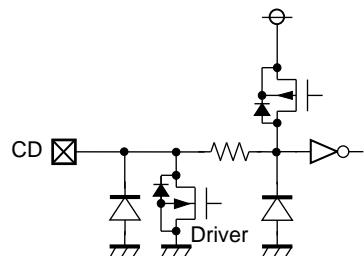PIN EQUIVALENT CIRCUIT DIAGRAMS**< VOUT Pin >****< CE Pin >****< CD Pin >****< OV Pin >****< UV Pin >****< SENSE Pin >**

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage	-0.3 to 50	V
	Peak Input Voltage ⁽¹⁾	60	V
V_{CE}	CE Pin Input Voltage	-0.3 to 50	V
V_{OUT}	Output Voltage	-0.3 to $V_{IN} + 0.3 \leq 50$	V
V_{SENSE}	SENSE Pin Voltage	-0.3 to 50	V
V_{CD}	CD Pin Output Voltage	-0.3 to 50	V
V_{OVOUT}	OV Pin Output Voltage	-0.3 to 7.0	V
V_{UVOUT}	UV Pin Output Voltage	-0.3 to 7.0	V
P_D	Power Dissipation ⁽²⁾ (HSOP-8E, JEDEC STD. 51)	3600	mW
T_j	Junction Temperature	-40 to 150	°C
T_{STG}	Storage Temperature	-55 to 150	°C

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause permanent damage and may degrade the lifetime and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings are not assured.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage	3.5 to 42	V
V_{CE}	CE Pin Input Voltage	0 to 42	V
V_{SENSE}	SENSE Pin Input Voltage	0 to 6.0	V
V_{OVOUT}	OV Pin Output Voltage	0 to 6.0	V
V_{UVOUT}	UV Pin Output Voltage	0 to 6.0	V
T_a	Operating Temperature	-40 to 125	°C

RECOMMENDED OPERATING CONDITIONS

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

⁽¹⁾ Duration time: 200 ms

⁽²⁾ Refer to POWER DISSIPATION for detail information

ELECTRICAL CHARACTERISTICS

$C_{IN} = 1.0 \mu F$, $C_{OUT} = 10 \mu F$, $V_{IN} = 14 V$, unless otherwise noted.

The specifications surrounded by are guaranteed by design engineering at $-40^{\circ}C \leq Ta \leq 125^{\circ}C$.

R5116xxxx-AE

For All

($T_a = 25^{\circ}C$)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
I_{SS}	Supply Current	$I_{OUT} = 0 mA$		25	<input type="checkbox"/> 50	μA
$I_{Standby}$	Standby Current	$V_{IN} = 42 V$, $V_{CE} = 0 V$		1.5	<input type="checkbox"/> 5.0	μA
I_{PD}	CE Pull-down Current			0.2	<input type="checkbox"/> 0.6	μA
V_{CEH}	CE Input Voltage, high		<input type="checkbox"/> 2.0		<input type="checkbox"/> 42	V
V_{CEL}	CE Input Voltage, low		0		<input type="checkbox"/> 1.0	V

All test items listed under Electrical Characteristics are done under the pulse load condition ($T_j \approx T_a = 25^{\circ}C$).

VR Section

($T_a = 25^{\circ}C$)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit	
V_{OUT}	Output Voltage	$V_{IN} = 14 V$, $I_{OUT} = 1 mA$	$x0.995$		$\times 1.005$	V	
		$-40^{\circ}C \leq T_a \leq 125^{\circ}C$	<input type="checkbox"/> 0.9875		<input type="checkbox"/> 1.0075		
$\Delta V_{OUT}/\Delta I_{OUT}$	Load Regulation	$V_{IN} = V_{SET} + 3.0 V$	$1 mA \leq I_{OUT} \leq 300 mA$	<input type="checkbox"/> -10	<input type="checkbox"/> 10	mV	
			$1 mA \leq I_{OUT} \leq 500 mA$	<input type="checkbox"/> -15	<input type="checkbox"/> 15		
V_{DIF}	Dropout Voltage	$I_{OUT} = 500 mA$	$V_{SET} = 3.3 V$		1.1	<input type="checkbox"/> 1.7	V
			$V_{SET} = 5.0 V$		0.9	<input type="checkbox"/> 1.5	
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation	$I_{OUT} = 1 mA$	$8.0 V \leq V_{IN} \leq 16 V$	<input type="checkbox"/> -10	<input type="checkbox"/> 10	mV	
			$6.0 V \leq V_{IN} \leq 32 V$	<input type="checkbox"/> -25	<input type="checkbox"/> 25		
I_{LIM}	Output Current Limit	$V_{IN} = 8.0 V$	<input type="checkbox"/> 500	750		mA	
I_{SC}	Short Current Limit	$V_{OUT} = 0 V$	<input type="checkbox"/> 70	105	<input type="checkbox"/> 150	mA	
T_{TSD}	Thermal Shutdown Temperature	Junction Temperature	<input type="checkbox"/> 165	175		°C	
T_{TSR}	Thermal Shutdown Release Temperature	Junction Temperature	<input type="checkbox"/> 125	145		°C	

All test items listed under Electrical Characteristics are done under the pulse load condition ($T_j \approx T_a = 25^{\circ}C$).

ELECTRICAL CHARACTERISTICS (Continued)

$C_{IN} = 1.0 \mu F$, $C_{OUT} = 10 \mu F$, $V_{IN} = 14 V$, unless otherwise noted.

The specifications surrounded by are guaranteed by design engineering at $-40^\circ C \leq Ta \leq 125^\circ C$.

VD Section

($T_a = 25^\circ C$)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
V_{OVDET}	OV Detector Threshold	$T_a = 25^\circ C$	$\times 0.995$		$\times 1.005$	V
		$-40^\circ C \leq Ta \leq 125^\circ C$	$\times 0.9875$		$\times 1.0075$	
V_{UVDET}	UV Detector Threshold	$T_a = 25^\circ C$	$\times 0.995$		$\times 1.005$	V
		$-40^\circ C \leq Ta \leq 125^\circ C$	$\times 0.9875$		$\times 1.0075$	
V_{OVHYS}	OV Detector Threshold Hysteresis		V_{OVDET} $\times 0.003$	V_{OVDET} $\times 0.005$	V_{OVDET} $\times 0.007$	V
V_{Uvhys}	UV Detector Threshold Hysteresis		V_{UVDET} $\times 0.003$	V_{UVDET} $\times 0.005$	V_{UVDET} $\times 0.007$	V
t_{DELAY}	Release Output Delay Time (Power-on Reset)	$C_D = 10 nF$	2	4	8	ms
V_{UVLO}	UVLO Detector Threshold			1.8	2.8	V
$V_{UvloHys}$	UVLO Detector Threshold Hysteresis			0.1	0.2	V
V_{ovout}	OV Pull-up Current				6.0	V
V_{uvout}	UV Pull-up Current				6.0	V
I_{outov}	Nch Output Current (OV Output Pin)	$V_{IN} = 3.0 V$, $V_{DS} = 0.1 V$	0.8	2.0		mA
I_{outuv}	Nch Output Current (UV Output Pin)	$V_{IN} = 3.0 V$, $V_{DS} = 0.1 V$	0.8	2.0		mA
I_{leakov}	Nch Leakage Current (OV Output Pin)	$V_{ovout} = 5.5 V$			0.3	μA
I_{leakuv}	Nch Leakage Current (UV Output Pin)	$V_{uvout} = 5.5 V$			0.3	μA
R_{LCD}	C_D Pin Discharge Nch Tr.ON Resistance	$V_{CE} = 0 V$, $V_{CD} = 0.1 V$		1.2	3.0	$k\Omega$

All test items listed under Electrical Characteristics are done under the pulse load condition ($T_j \approx T_a = 25^\circ C$).

ELECTRICAL CHARACTERISTICS (Continued)

$C_{IN} = 1.0 \mu F$, $C_{OUT} = 10 \mu F$, $V_{IN} = 14 V$, unless otherwise noted.

R5116xxxx-KE

For All							(-40°C ≤ Ta ≤ 125°C)
Symbol	Parameter	Condition		Min.	Typ.	Max.	Unit
I_{SS}	Supply Current	$I_{OUT} = 0 mA$			25	50	μA
$I_{Standby}$	Standby Current	$V_{IN} = 42 V$, $V_{CE} = 0 V$			1.5	5.0	μA
I_{PD}	CE Pull-down Current				0.2	0.6	μA
V_{CEH}	CE Input Voltage, high			2.0		42	V
V_{CEL}	CE Input Voltage, low			0		1.0	V

All test items listed under Electrical Characteristics are done under the pulse load condition ($T_j \approx Ta = 25^\circ C$).

VR Section							(-40°C ≤ Ta ≤ 125°C)
Symbol	Parameter	Condition		Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	$V_{IN} = 14 V$, $I_{OUT} = 1 mA$	$T_a = 25^\circ C$	×0.995		×1.005	V
			$-40^\circ C \leq Ta \leq 125^\circ C$	×0.9875		×1.0075	
$\Delta V_{OUT}/\Delta I_{OUT}$	Load Regulation	$V_{IN} = V_{SET} + 3.0 V$	$1 mA \leq I_{OUT} \leq 300 mA$	-10	0	10	mV
			$1 mA \leq I_{OUT} \leq 500 mA$	-15		15	
V_{DIF}	Dropout Voltage	$I_{OUT} = 500 mA$	$V_{SET} = 3.3 V$		1.1	1.7	V
			$V_{SET} = 5.0 V$		0.9	1.5	
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation	$I_{OUT} = 1 mA$	$8.0 V \leq V_{IN} \leq 16 V$	-10	0	10	mV
			$6.0 V \leq V_{IN} \leq 32 V$	-25		25	
I_{LIM}	Output Current Limit	$V_{IN} = 8.0 V$		500	750		mA
I_{SC}	Short Current Limit	$V_{OUT} = 0 V$		70	105	150	mA
T_{TSD}	Thermal Shutdown Temperature	Junction Temperature		165	175		°C
T_{TSR}	Thermal Shutdown Release Temperature	Junction Temperature		125	145		°C

All test items listed under Electrical Characteristics are done under the pulse load condition ($T_j \approx Ta = 25^\circ C$).

ELECTRICAL CHARACTERISTICS (Continued) $C_{IN} = 1.0 \mu F, C_{OUT} = 10 \mu F, V_{IN} = 14 V$, unless otherwise noted.**VD Section**

(-40°C ≤ Ta ≤ 125°C)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
V_{OVDET}	OV Detector Threshold	Ta = 25°C	×0.995		×1.005	V
		-40°C ≤ Ta ≤ 125°C	×0.9875		×1.0075	
V_{UVDET}	UV Detector Threshold	Ta = 25°C	×0.995		×1.005	V
		-40°C ≤ Ta ≤ 125°C	×0.9875		×1.0075	
V_{OVHYS}	OV Detector Threshold Hysteresis		$V_{OVDET} \times 0.003$	$V_{OVDET} \times 0.005$	$V_{OVDET} \times 0.007$	V
V_{Uvhys}	UV Detector Threshold Hysteresis		$V_{UVDET} \times 0.003$	$V_{UVDET} \times 0.005$	$V_{UVDET} \times 0.007$	V
t_{DELAY}	Release Output Delay Time (Power-on Reset)	$C_D = 10 \text{ nF}$	2	4	8	ms
V_{UVLO}	UVLO Detector Threshold			1.8	2.8	V
$V_{UVLOHYS}$	UVLO Detector Threshold Hysteresis			0.1	0.2	V
V_{ovout}	OV Pull-up Voltage				6.0	V
V_{uvout}	UV Pull-up Voltage				6.0	V
I_{OUTOV}	Nch Output Current (OV Output Pin)	$V_{IN} = 3.0 \text{ V}, V_{DS} = 0.1 \text{ V}$	0.8	2.0		mA
I_{OUTUV}	Nch Output Current (UV Output Pin)	$V_{IN} = 3.0 \text{ V}, V_{DS} = 0.1 \text{ V}$	0.8	2.0		mA
I_{LEAKOV}	Nch Leakage Current (OV Output Pin)	$V_{ovout} = 5.5 \text{ V}$			0.3	μA
I_{LEAKUV}	Nch Leakage Current (UV Output Pin)	$V_{uvout} = 5.5 \text{ V}$			0.3	μA
R_{LCD}	CD Pin Discharge Nch Tr.ON Resistance	$V_{CE} = 0 \text{ V}, V_{CD} = 0.1 \text{ V}$		1.2	3.0	kΩ

All test items listed under Electrical Characteristics are done under the pulse load condition ($T_j \approx Ta = 25^\circ\text{C}$).

ELECTRICAL CHARACTERISTICS (Continued)

The specifications surrounded by [] are guaranteed by design engineering at $-40^{\circ}\text{C} \leq \text{Ta} \leq 125^{\circ}\text{C}$

R5116S (-AE) Product-specific Electrical Characteristics

Product Name	V_{OUT}			V_{OUT}		
	$\text{Ta}=25^{\circ}\text{C}$			$-40^{\circ}\text{C} \leq \text{Ta} \leq 125^{\circ}\text{C}$		
	Min.	Typ.	Max.	Min.	Typ.	Max.
R5116S001A	4.975	5.000	5.025	[4.938]	5.000	[5.037]
R5116S002A	3.284	3.300	3.316	[3.259]	3.300	[3.324]
R5116S003A	4.975	5.000	5.025	[4.938]	5.000	[5.037]

Product Name	V_{OVDET}			V_{OVDET}			V_{OVHYS}		
	$\text{Ta}=25^{\circ}\text{C}$			$-40^{\circ}\text{C} \leq \text{Ta} \leq 125^{\circ}\text{C}$			$\text{Ta}=25^{\circ}\text{C}$		
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
R5116S001A	5.274	5.300	5.326	[5.234]	5.300	[5.339]	[0.01590]	0.02650	[0.03710]
R5116S002A	3.523	3.540	3.557	[3.496]	3.540	[3.566]	[0.01062]	0.01770	[0.02478]
R5116S003A	5.234	5.260	5.286	[5.195]	5.260	[5.299]	[0.01578]	0.02630	[0.03682]

Product Name	V_{UVDET}			V_{UVDET}			V_{UVHYS}		
	$\text{Ta}=25^{\circ}\text{C}$			$-40^{\circ}\text{C} \leq \text{Ta} \leq 125^{\circ}\text{C}$			$\text{Ta}=25^{\circ}\text{C}$		
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
R5116S001A	4.677	4.700	4.723	[4.642]	4.700	[4.735]	[0.01410]	0.02350	[0.03290]
R5116S002A	3.035	3.050	3.065	[3.012]	3.050	[3.072]	[0.00915]	0.01525	[0.02135]
R5116S003A	2.488	2.500	2.512	[2.469]	2.500	[2.518]	[0.00750]	0.01250	[0.01750]

ELECTRICAL CHARACTERISTICS (Continued)

R5116S (-KE) Product-specific Electrical Characteristics

Product Name	V _{OUT}			V _{OUT}		
	Ta=25°C			-40°C ≤ Ta ≤ 125°C		
	Min.	Typ.	Max.	Min.	Typ.	Max.
R5116S001A	4.975	5.000	5.025	4.938	5.000	5.037
R5116S002A	3.284	3.300	3.316	3.259	3.300	3.324
R5116S003A	4.975	5.000	5.025	4.938	5.000	5.037

Product Name	V _{OVDET}			V _{OVDET}			V _{OVHYS}		
	Ta=25°C			-40°C ≤ Ta ≤ 125°C			Ta=25°C		
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
R5116S001A	5.274	5.300	5.326	5.234	5.300	5.339	0.01590	0.02650	0.03710
R5116S002A	3.523	3.540	3.557	3.496	3.540	3.566	0.01062	0.01770	0.02478
R5116S003A	5.234	5.260	5.286	5.195	5.260	5.299	0.01578	0.02630	0.03682


Product Name	V _{UVDET}			V _{UVDET}			V _{UVHYS}		
	Ta=25°C			-40°C ≤ Ta ≤ 125°C			Ta=25°C		
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
R5116S001A	4.677	4.700	4.723	4.642	4.700	4.735	0.01410	0.02350	0.03290
R5116S002A	3.035	3.050	3.065	3.012	3.050	3.072	0.00915	0.01525	0.02135
R5116S003A	2.488	2.500	2.512	2.469	2.500	2.518	0.00750	0.01250	0.01750

THEORY OF OPERATION

Thermal Shutdown

When the junction temperature of this device exceeds 175°C (Typ.), the built-in thermal shutdown circuit stops the regulator operation. After that, when the temperature drops to 145°C (Typ.) or lower, the regulator restarts the operation. Unless eliminating the overheating problem, the regulator turns on and off repeatedly and a pulse shaped output voltage occurs as result.

R5116xxx Voltage Detector

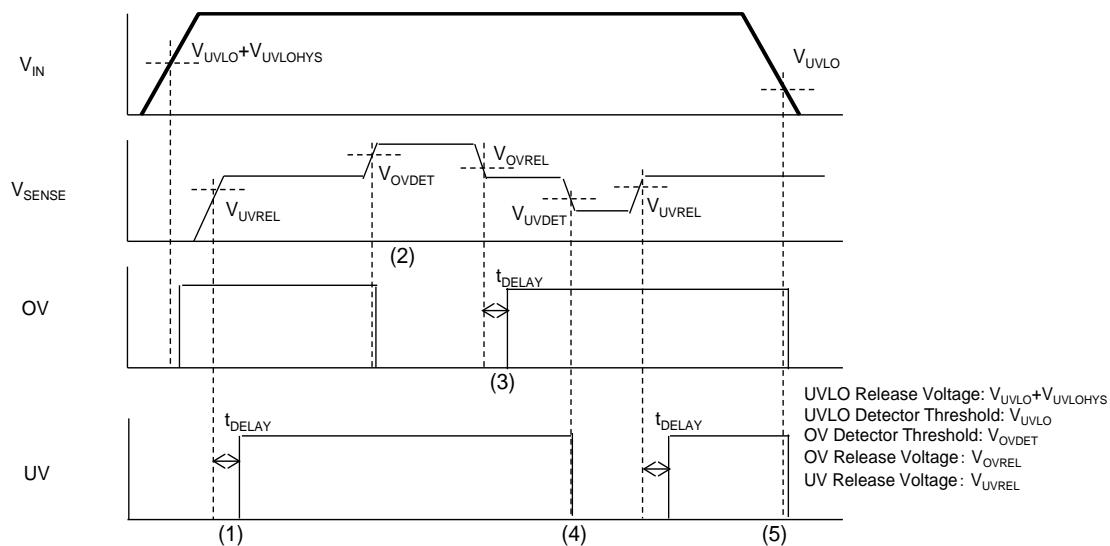


R5116xxx Voltage Detector Timing Chart

- (1) When the SENSE pin voltage (V_{SENSE}) exceed the UV release voltage (V_{UVREL}), the UV pin output becomes "High" after the release delay time (t_{DELAY}).
- (2) When V_{SENSE} exceed the OV detector threshold (V_{OVDET}) by increasing in voltage, the OV pin output becomes "Low" after the detection delay time (Typ.100 µs) and enters the OV detecting state.
- (3) When V_{SENSE} decreases less than the OV release voltage (V_{OVREL}), the OV pin output becomes "High" after the release delay time (t_{DELAY}).
- (4) When V_{SENSE} decreases less than the UV detector threshold (V_{UVDET}), the UV pin output becomes "Low" after the detection delay time (Typ.100 µs) and enters the UV detecting state.
- (5) When the input pin voltage (V_{IN}) decreases less than the UVLO detector threshold (V_{UVLO}), the OV and UV pins output become "Low".

VD Delay Operation and Release Delay Time (t_{DELAY})

At Undervoltage Detection

When supplying a voltage higher than the UV release voltage (V_{UVREL}) to the SENSE pin, a charging to an external capacitor starts and the CD pin voltage (V_{CD}) increases. The UV pin voltage (V_{UV}) maintains "Low" until V_{CD} reaches the CD pin threshold voltage (V_{TCD}). When V_{CD} exceeds V_{TCD} , V_{UV} is inverted from "Low" to "High". The release delay time (t_{DELAY}) is the period from the time the SENSE pin voltage (V_{SENSE}) exceeds V_{UVREL} to a rising edge of V_{UV} . When the output voltage turns from "Low" to "High", a charge carrier of the external capacitor starts discharging. When supplying a voltage lower than the UV detector threshold (V_{UVDET}) to the SENSE pin, the detection delay time (t_{PHL}) remains constant independently of the external capacitor. t_{PHL} is the time V_{UV} is inverted from "High" to "Low".

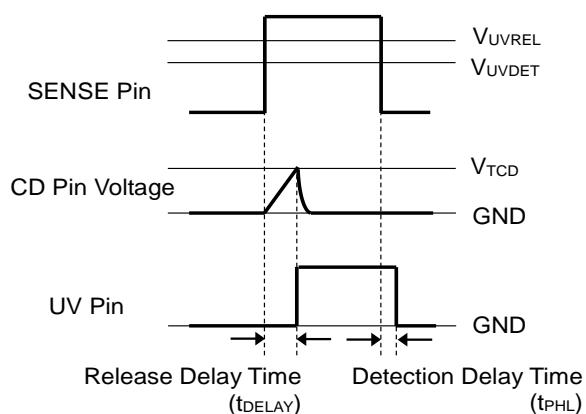


Undervoltage Release Delay Timing Diagram

Calculation of Undervoltage Release Delay Time

The following equation can calculate a typical value of the release delay time (t_{DELAY}) with using the external capacitor (C_D).


$$t_{DELAY} \text{ (s)} = 0.72 \times C_D \text{ (F)} / (1.8 \times 10^{-6})$$

t_{DELAY} is the period from supplying a pulse voltage of 1.0 V to (V_{UVDET}) + 1.0 V to the SENSE pin to the UV pin reached 2.5 V after the UV pin is pulled up to 5V by connecting with a resistor of 100kΩ.

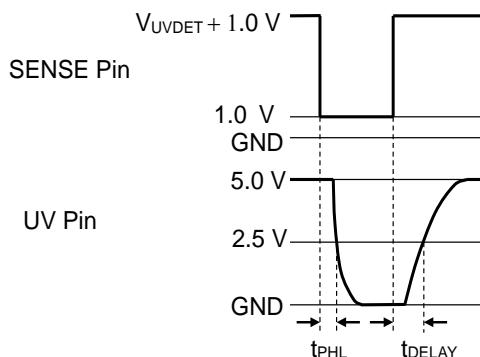

At Overvoltage Detection

When supplying a voltage lower than the OV release voltage (V_{OVREL}) to the SENSE pin, a charging to an external capacitor starts and the CD pin voltage (V_{CD}) increases. The OV pin voltage (V_{ov}) maintains "Low" until V_{CD} reaches the CD pin threshold voltage (V_{TCD}). When V_{CD} exceeds V_{TCD} , V_{ov} is inverted from "Low" to "High". The release delay time (t_{DELAY}) is the period from the time the SENSE pin voltage (V_{SENSE}) falls below V_{OVREL} to a rising edge of V_{ov} . When the output voltage turns from "Low" to "High", a charge carrier of the external capacitor starts discharging. When the voltage higher than OV detector threshold (V_{OVDED}) is supplied to the SENSE pin, the detection delay time (t_{PHL}) remains constant independently of the external capacitor. t_{PHL} is the period that V_{ov} is inverted from "High" to "Low".

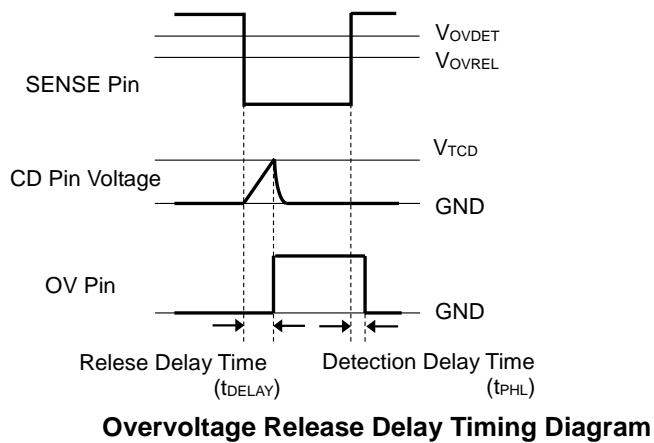


Overvoltage Release Delay Timing Diagram

Calculation of Overvoltage Release Delay Time

The following equation can calculate a typical value of the release delay time (t_{DELAY}) with using the external capacitor (C_D).

$$t_{DELAY} \text{ (s)} = 0.72 \times C_D \text{ (F)} / (1.8 \times 10^{-6})$$

t_{DELAY} is the period from supplying a pulse voltage of 6.0 V to (V_{OVREL}) - 1.0 V to the SENSE pin to the OV pin reached 2.5 V after the OV pin is pulled up to 5V by connecting with a resistor of 100kΩ.

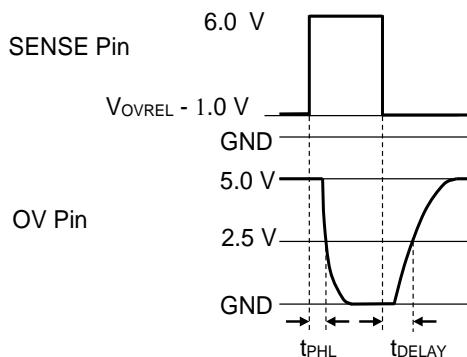

Voltage Setting of Voltage Regulator

The Window Voltage Detector (Window VD) detects the drop and rise of the Voltage Regulator (VR). When the UV release voltage (V_{UVREL}) is set to a voltage above the VR output voltage (V_{OUT}), the reset signal of Window VD is not released even if Window VD monitors the VR output voltage returns to the normal value after detecting the drop of VR. When the OV release voltage (V_{OVREL}) is set to a voltage under the VR output voltage (V_{OUT}), the reset signal of Window VD is not released even if Window VD monitors the VR output voltage returns to the normal value after detecting the rise of VR.

To prevent this issue, the following conditions are required between V_{OUT} and V_{UVREL} , and between V_{OUT} and V_{OVREL} .

$$(VR \text{ Set Output Voltage}) \times 0.9875 - 15 \text{ mV}^* > (UV \text{ Set Detector Threshold}) \times 1.0075 \times 1.007$$


$$(OV \text{ Set Detector Threshold}) \times 0.9875 \times 0.993 > (VR \text{ Set Output Voltage}) \times 1.0075 + 15 \text{ mV}^*$$

* 15mV is the worst value of load regulation

When using a device without the above conditions of V_{OUT} and V_{DET} , careful consideration must be given to the system operation before use.

APPLICATION INFORMATION


TYPICAL APPLICATIONS

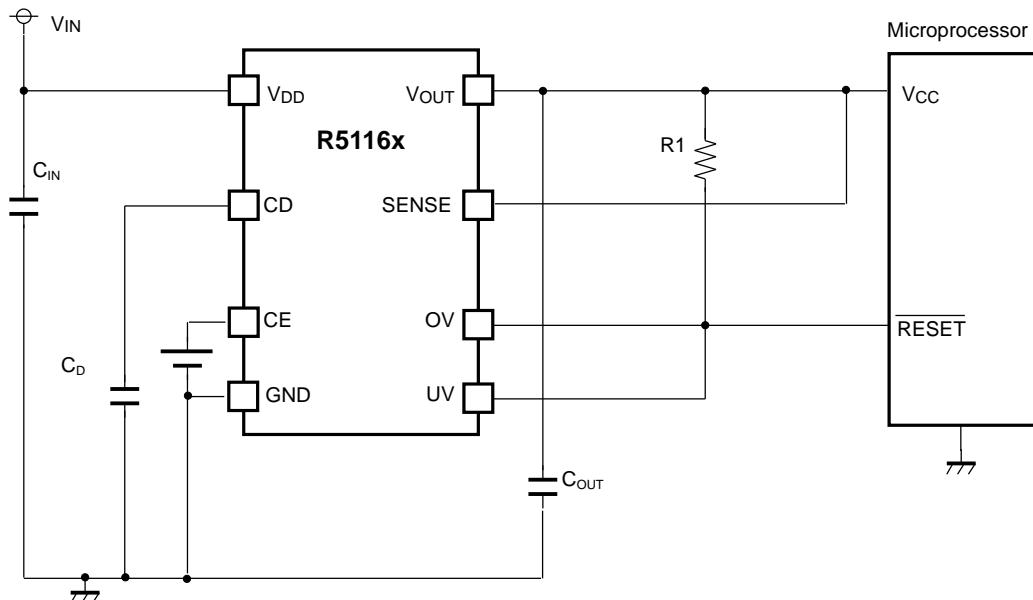

R5116xxx TYPICAL APPLICATIONS

Recommended Components

Symbol	Description
C _{IN}	Ceramic Capacitor, 1.0 μ F or more, 50V Rated Voltage , CGA4J2X7R1H104K, TDK
C _{OUT}	Ceramic Capacitor, 10 μ F or more, 50V Rated Voltage , CGA4J1X7R0J106K, TDK
C _D	A capacitor corresponding to setting of Release Output Delay Time
R1	A resistor covering the output current at Nch. driver ON and the leakage current at Nch. driver OFF. Refer to "Electrical Characteristic" providing the evaluation result with using a resistor of 100k Ω .

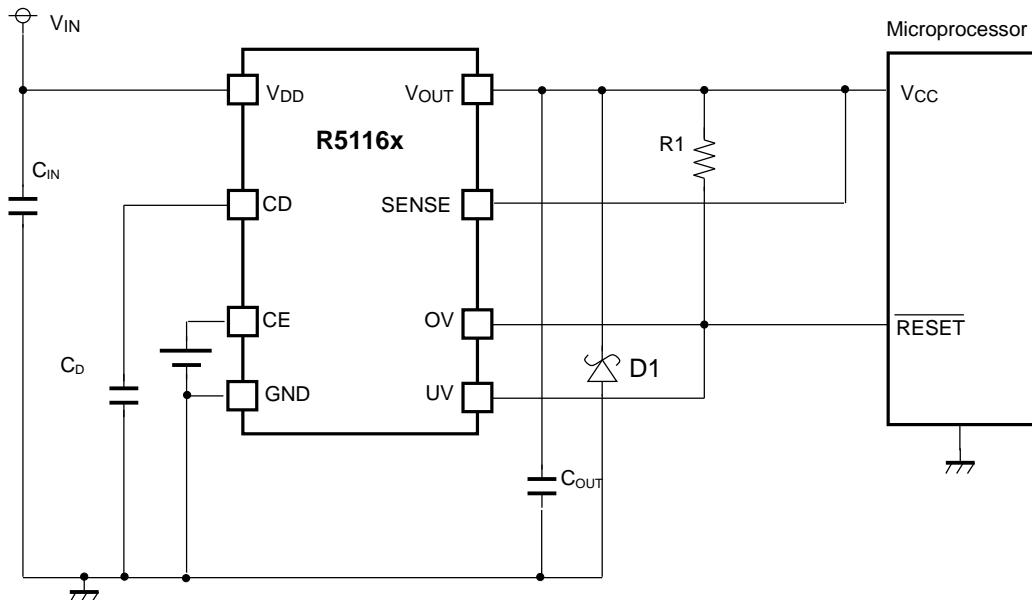TYPICAL APPLICATION FOR IC CHIP BREAKDOWN PREVENTION**R5116xxx Typical Application for IC Chip Breakdown Prevention**

When a sudden surge of electrical current travels along the V_{OUT} pin and GND due to a short-circuit, electrical resonance of a circuit involving an output capacitor (C_{OUT}) and a short circuit inductor generates a negative voltage and may damage the device or the load devices. Connecting a schottky diode (D_1) between the V_{OUT} pin and GND has the effect of preventing damage to them.

TECHNICAL NOTES

The performance of a power source circuit using this device is highly dependent on a peripheral circuit. A peripheral component or the device mounted on PCB should not exceed a rated voltage, a rated current or a rated power. When designing a peripheral circuit, please be fully aware of the following points.

Phase Compensation

Phase compensation is provided to secure stable operation even when the load current is varied by utilizing capacity of the output ceramic capacitor and Equivalent Series Resistance (ESR). For this purpose, be sure to use a capacitor with 10 μ F or more (C_{OUT}) and wire it to the pin as short as possible.


Evaluate the circuit with consideration of temperature and frequency characteristics, in case ESR value of the capacitor is large and the output is unstable. The capacitor with 1.0 μ F or more (C_{IN}) connected in between VDD pin and GND pin must be wired the shortest.

TYPICAL CHARACTERISTICS


Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.

1) Supply Current vs. Temperature ($V_{IN} = 14V$)

$V_{VRSET} = 3.3V$, $V_{UVSET} = 3.18V$, $V_{OVSET} = 3.43V$

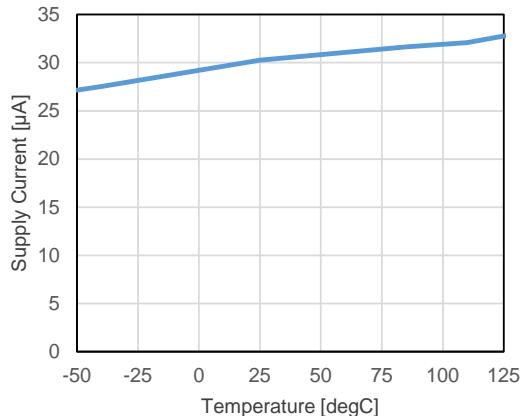


$V_{VRSET} = 5.0V$, $V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

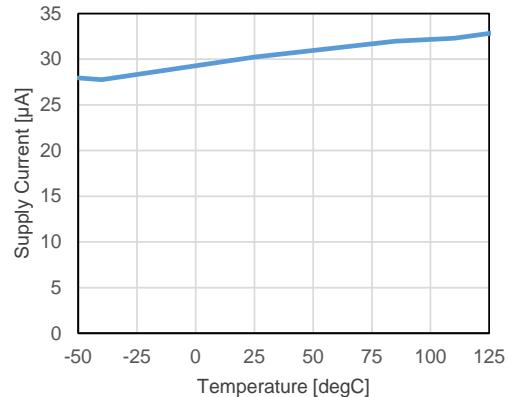


2) Supply Current vs. Input Voltage

$V_{VRSET} = 3.3V$, $V_{UVSET} = 3.18V$, $V_{OVSET} = 3.43V$

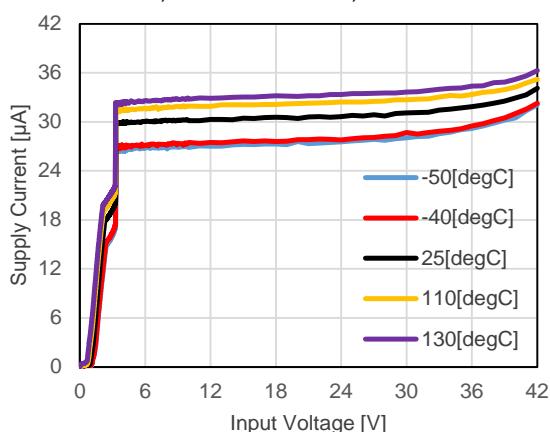


$V_{VRSET} = 5.0V$, $V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

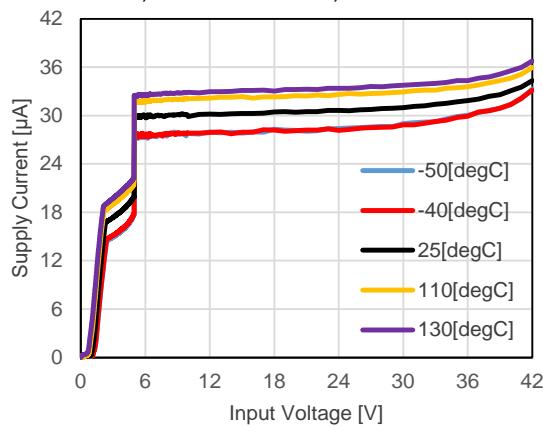








3) Supply Current vs. SENSE Voltage







$V_{VRSET} = 3.3V$, $V_{UVSET} = 3.18V$, $V_{OVSET} = 3.43V$

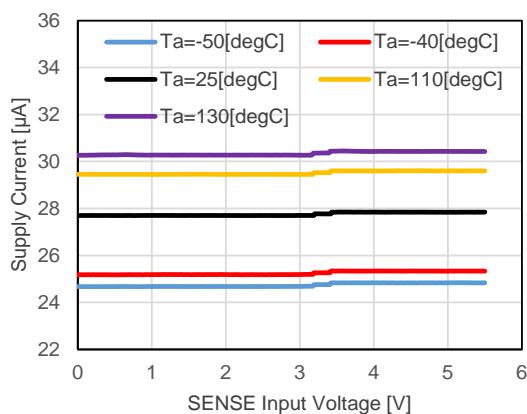


$V_{VRSET} = 5.0V$, $V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

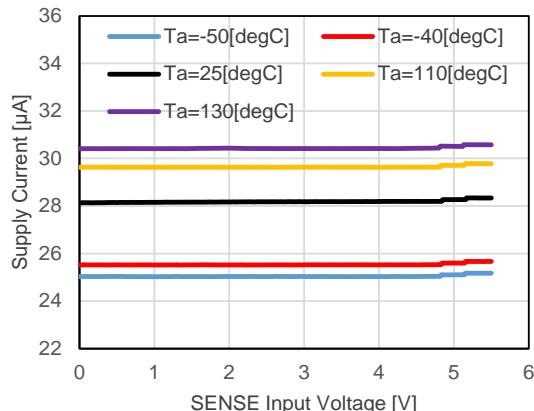

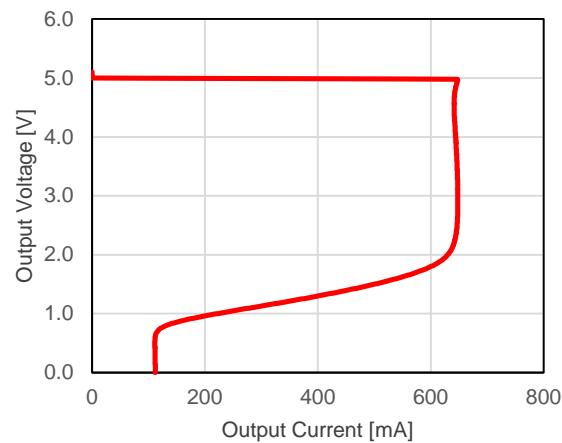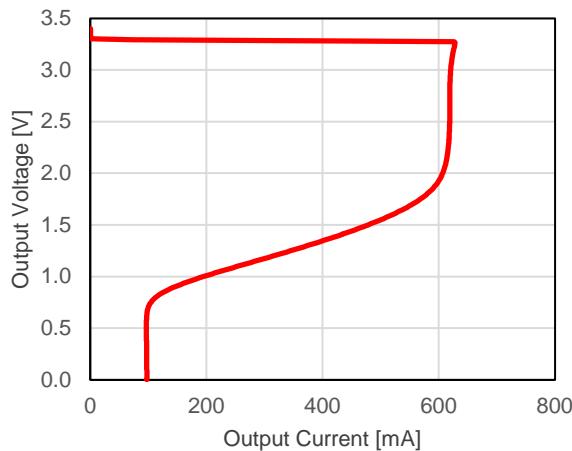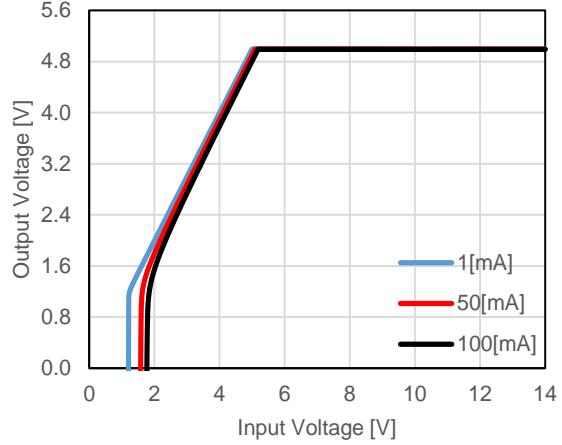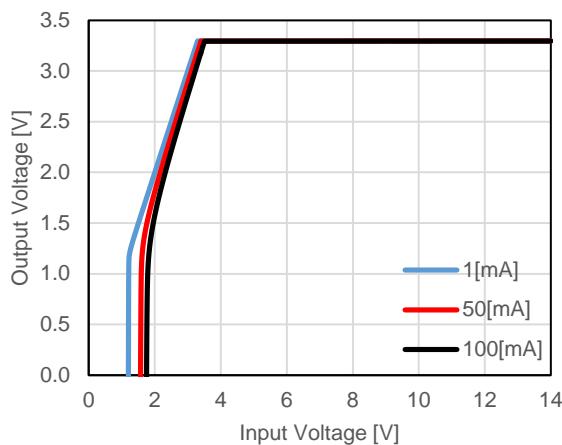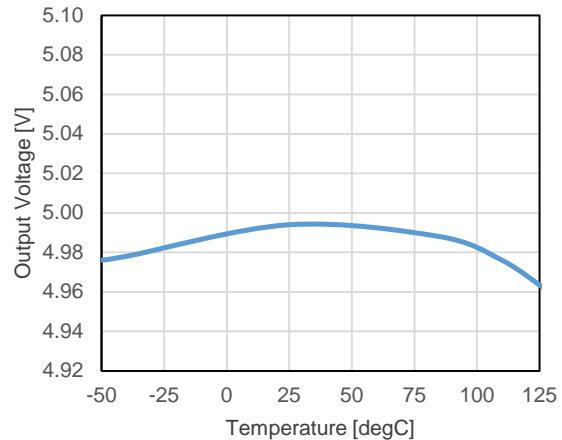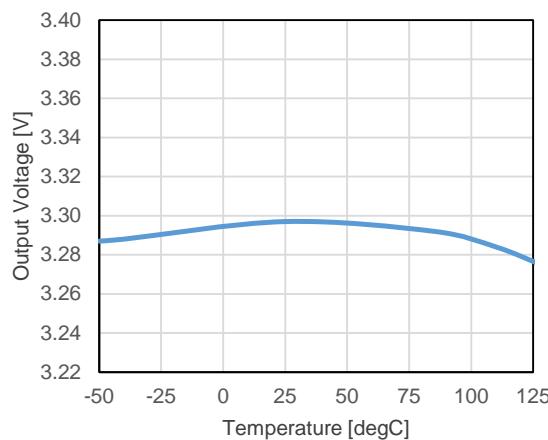
4) Output Voltage vs. Output Current ($V_{IN} = V_{VRSET} + 3.0$ V, $T_a = 25$ °C) $V_{VRSET} = 3.3V$ $V_{VRSET} = 5.0V$ **5) Output Voltage vs. Input Voltage ($T_a = 25$ °C)** $V_{VRSET} = 3.3V$ $V_{VRSET} = 5.0V$ **6) Output Voltage vs. Temperature ($V_{IN} = 14V$, $I_{OUT} = 1$ mA)** $V_{VRSET} = 3.3V$ $V_{VRSET} = 5.0V$ 

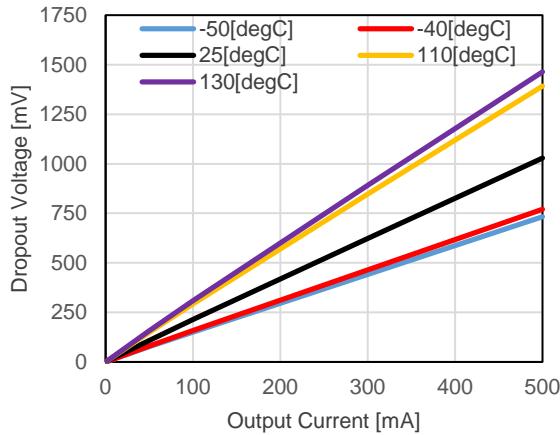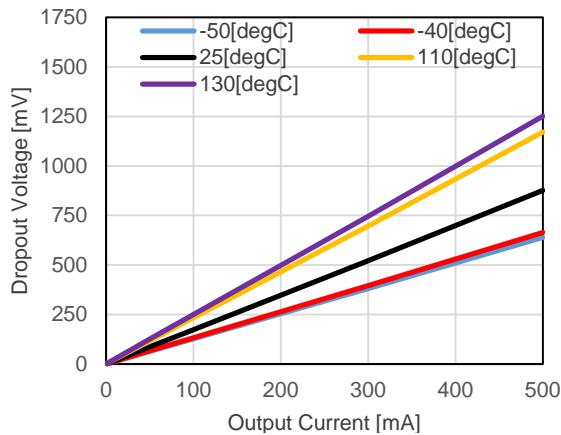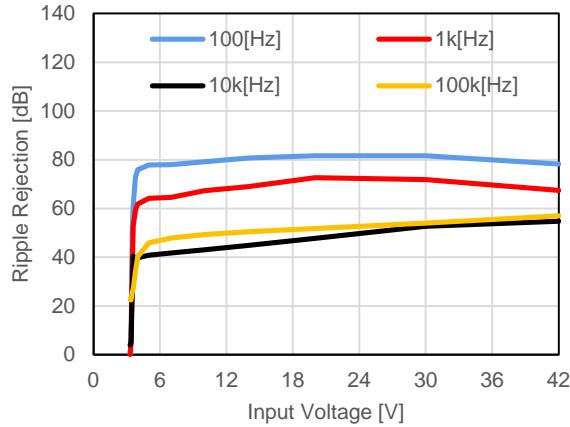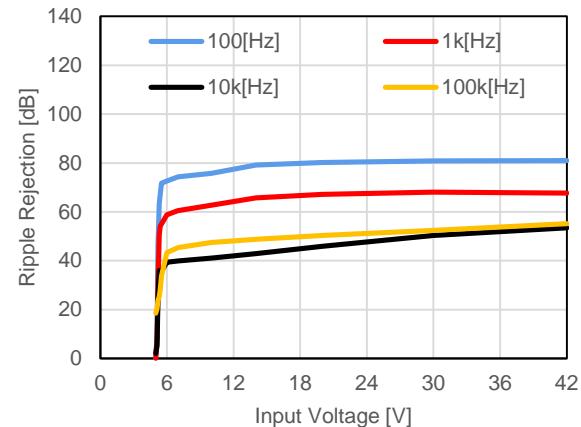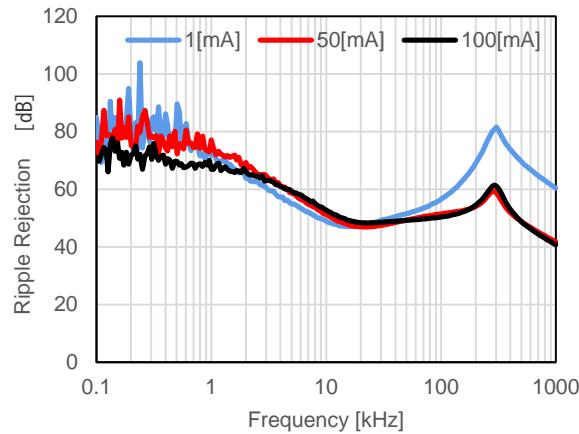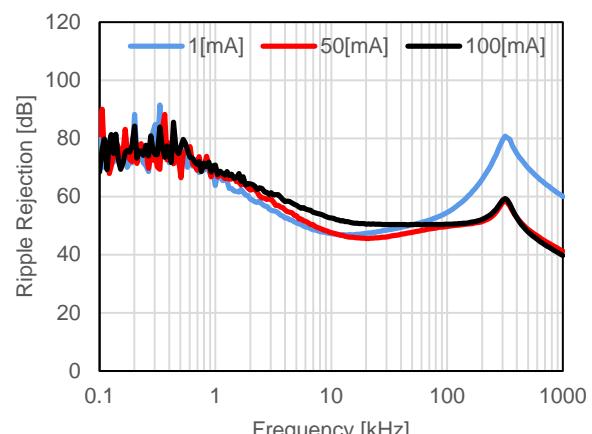7) Dropout Voltage vs. Output Current $V_{VRSET} = 3.3V$  $V_{VRSET} = 5.0V$ **8) Ripple Rejection vs. Input Voltage ($T_a=25\text{ }^{\circ}\text{C}$, $V_{ripple} = \pm 0.2\text{V}$)** $V_{VRSET} = 3.3V$  $V_{VRSET} = 5.0V$ **9) Ripple Rejection vs. Frequency ($T_a=25\text{ }^{\circ}\text{C}$, $V_{IN} = 14V \pm 0.2\text{V}_{ripple}$)** $V_{VRSET} = 3.3V$  $V_{VRSET} = 5.0V$ 


10) Input Transient Response ($T_a=25\text{ }^{\circ}\text{C}$, $V_{IN} = V_{VRSET} + 3.0\text{ V} \Leftrightarrow V_{VRSET} + 8.0\text{ V}$, $I_{OUT} = 1\text{ mA}$)
 $V_{VRSET} = 3.3\text{V}$ $V_{VRSET} = 5.0\text{V}$

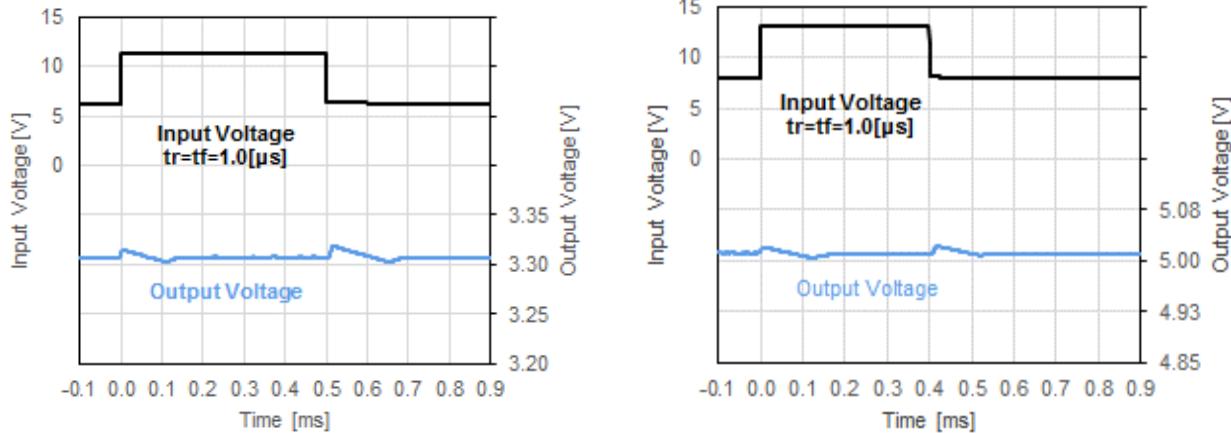

11) Load Transient Response ($T_a=25\text{ }^{\circ}\text{C}$, $I_{OUT} = 1 \Leftrightarrow 20\text{mA}$, $V_{IN} = 14\text{V}$)
 $V_{VRSET} = 3.3\text{V}$ $V_{VRSET} = 5.0\text{V}$

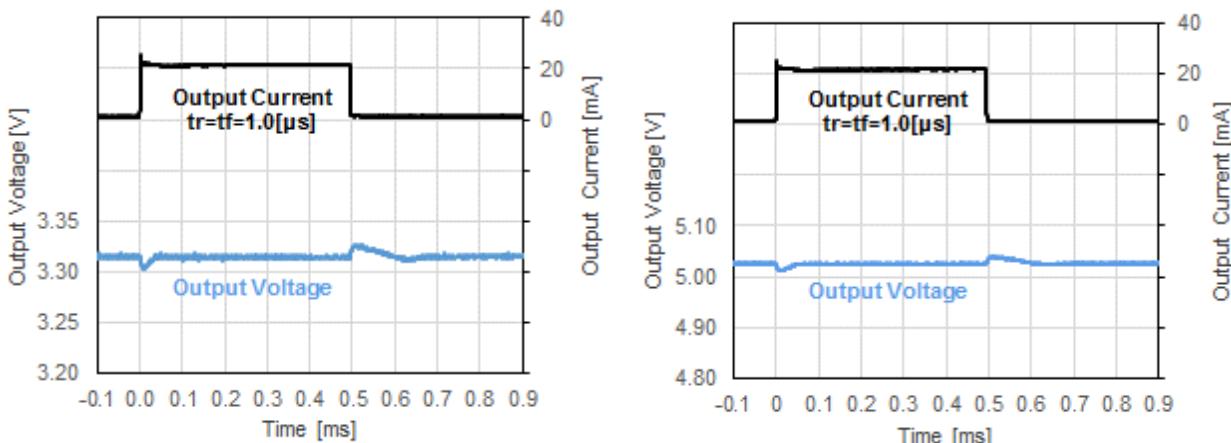



12) CE Transient Response ($T_a=25\text{ }^{\circ}\text{C}$, $V_{IN} = 14\text{V}$, $I_{OUT} = 1\text{ mA}$)
 $V_{VRSET} = 3.3\text{V}$

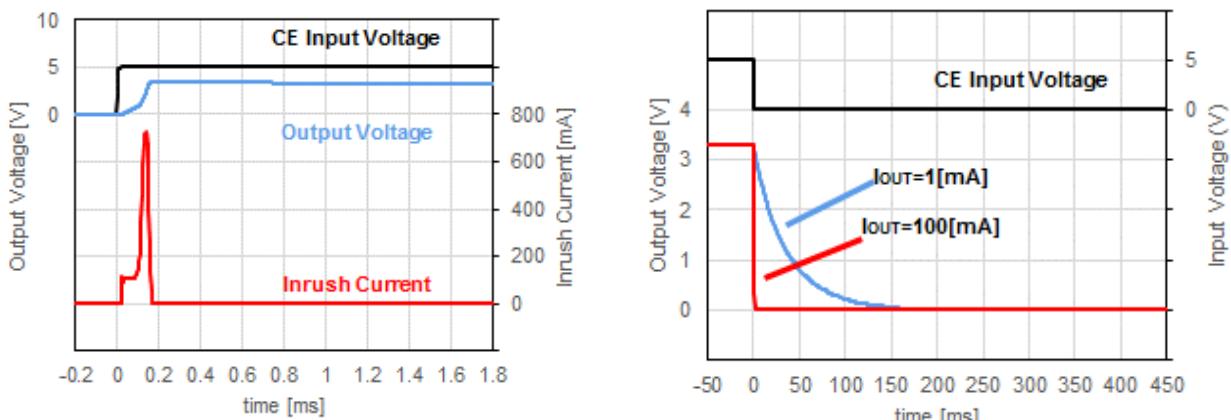

R5116x


No.EC-500-200911

$V_{VRSET} = 5.0V$

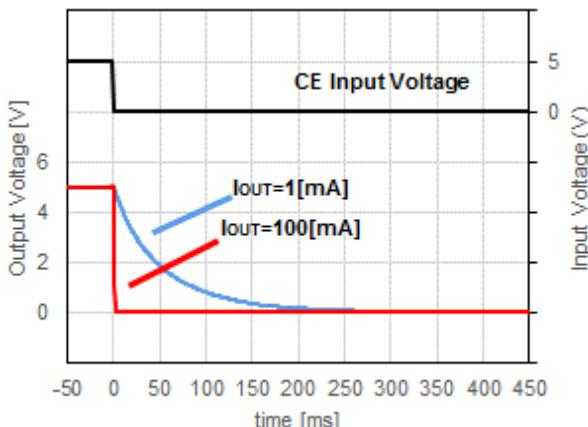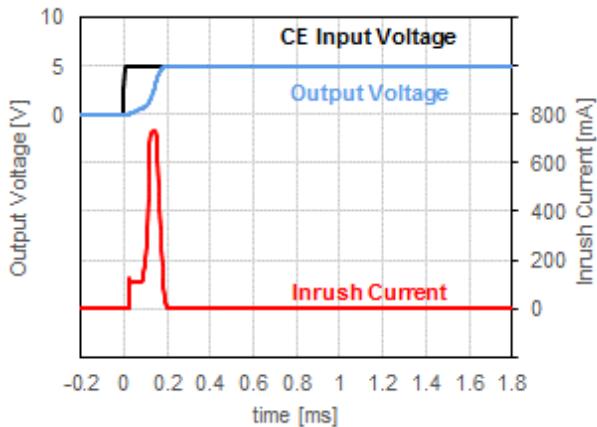


13) Load Dump ($T_a=25^\circ\text{C}$, $I_{OUT} = 1\text{ mA}$)

$V_{VRSET} = 3.3V$

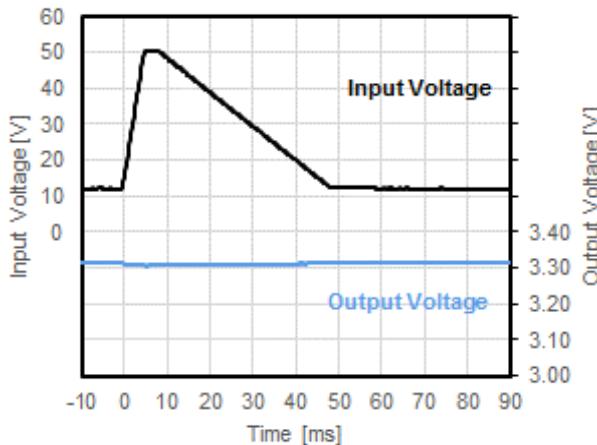


$V_{VRSET} = 5.0V$

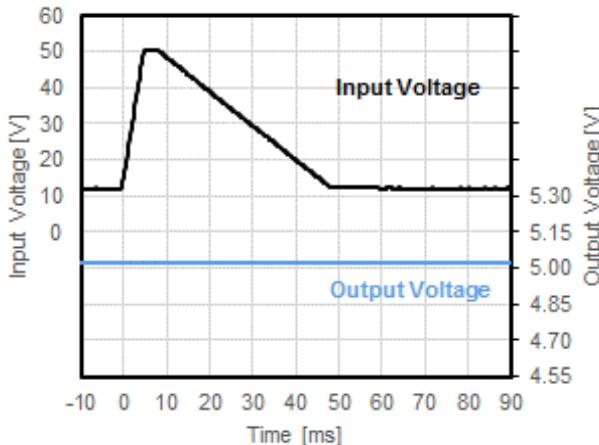








14) Cranking ($T_a=25^\circ\text{C}$, $I_{OUT} = 1\text{ mA}$)

$V_{VRSET} = 3.3V$


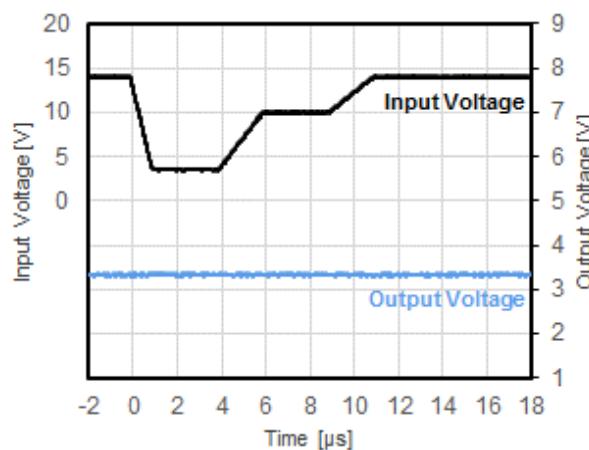


$V_{VRSET} = 5.0V$

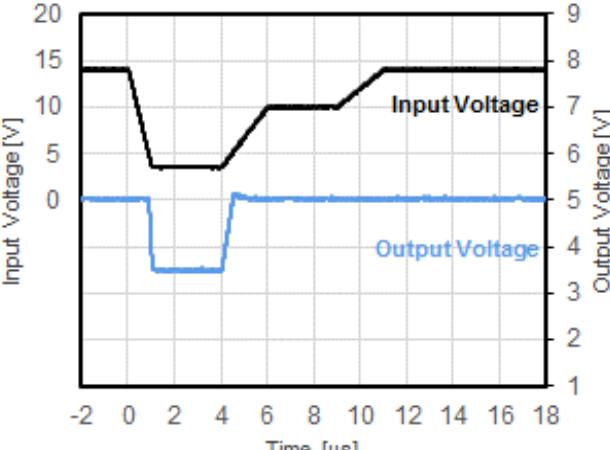

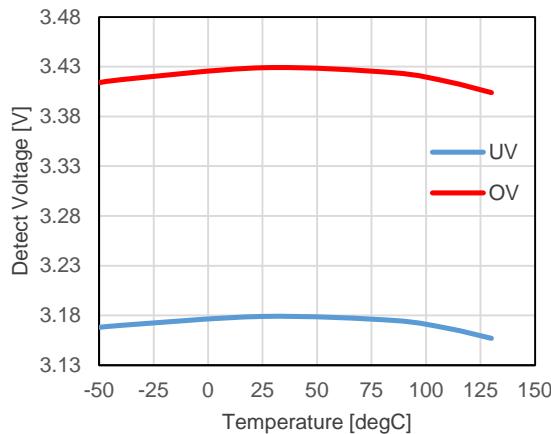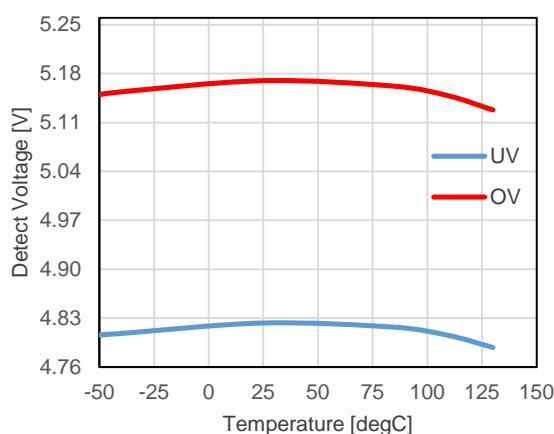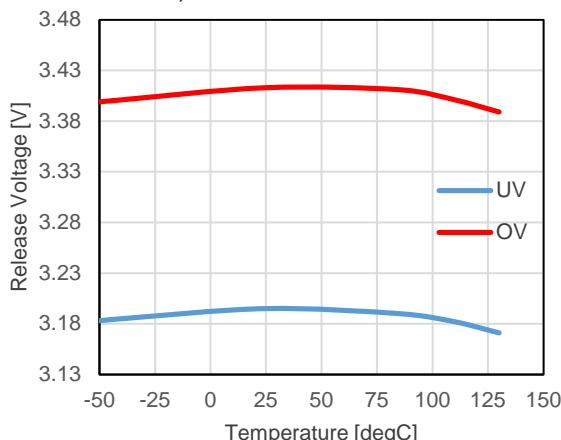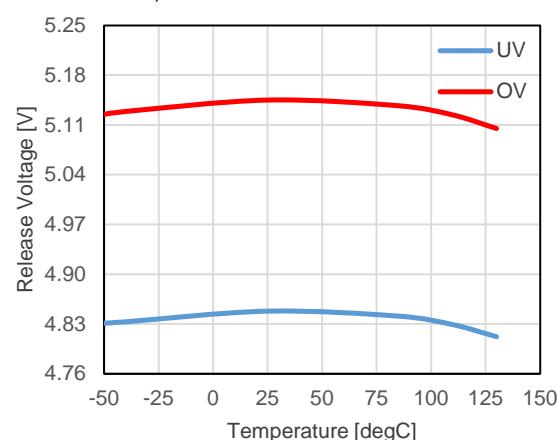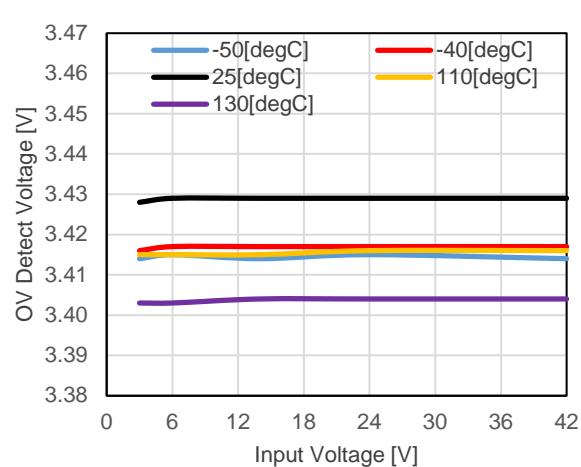
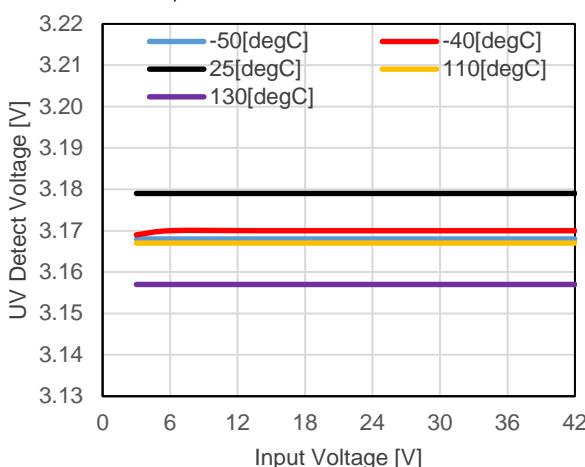
15) UV/OV Detection Voltage vs. Temperature $V_{UVSET} = 3.18V, V_{OVSET} = 3.43V$  $V_{UVSET} = 4.83V, V_{OVSET} = 5.17V$ **16) UV/OV Release Voltage vs. Temperature** $V_{UVSET} = 3.18V, V_{OVSET} = 3.43V$  $V_{UVSET} = 4.83V, V_{OVSET} = 5.17V$ **17) UV/OV Detection Voltage vs. Input Voltage** $V_{UVSET} = 3.18V, V_{OVSET} = 3.43V$ 

$V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

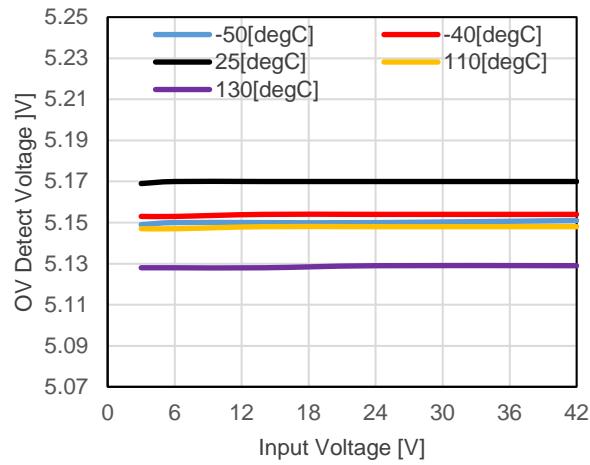
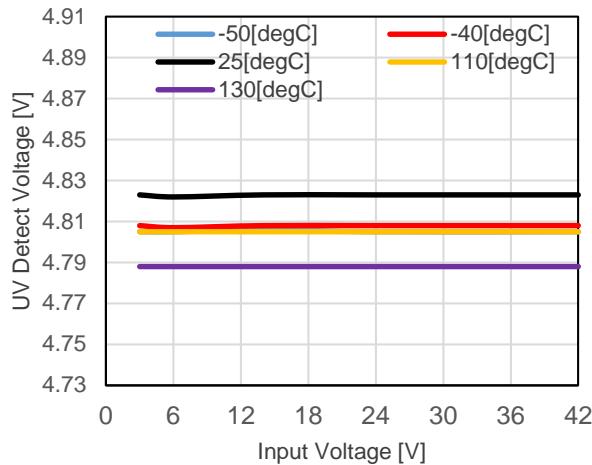


18) UV/OV Release Voltage vs. Input Voltage


$V_{UVSET} = 3.18V$, $V_{OVSET} = 3.43V$

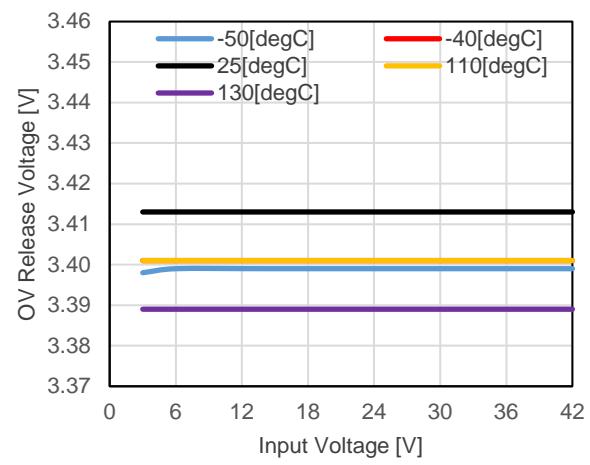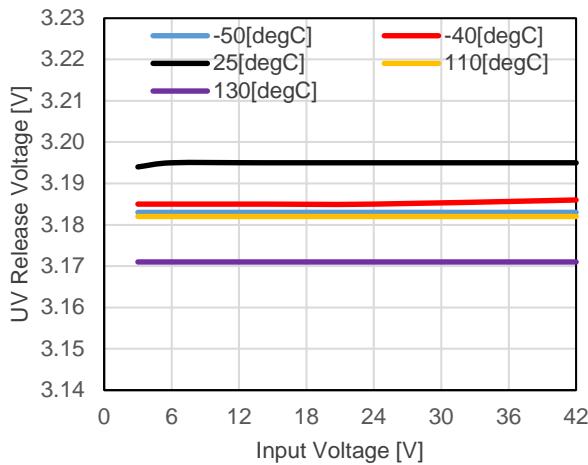


$V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

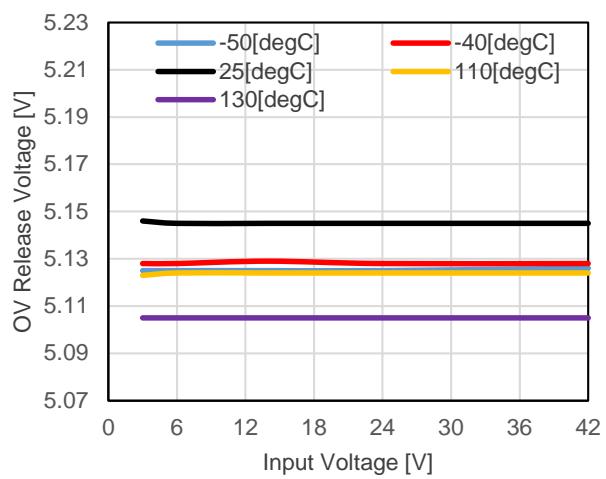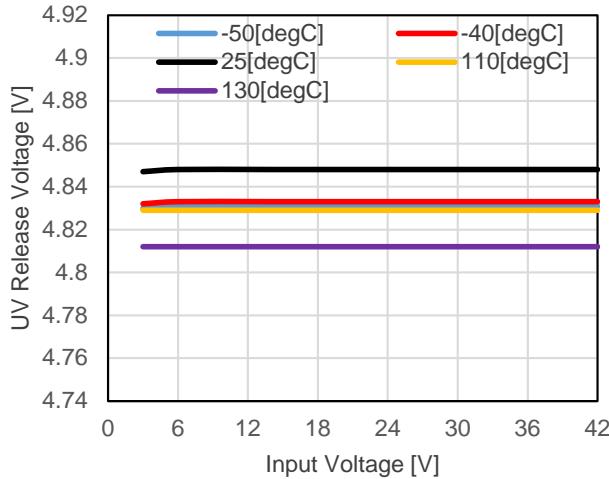


19) UV/OV Voltage vs. Input Voltage ($T_a = 25^\circ\text{C}$)
 $V_{UVSET} = 3.18\text{V}$, $V_{OVSET} = 3.43\text{V}$, Pull-up Voltage 5.0 V

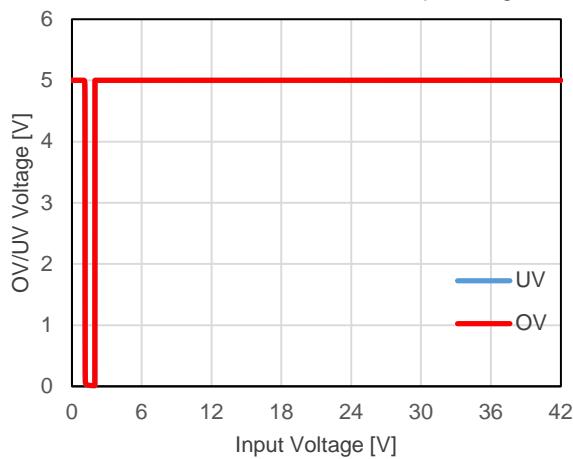


$V_{UVSET} = 4.83\text{V}$, $V_{OVSET} = 5.17\text{V}$, Pull-up Voltage 5.0 V

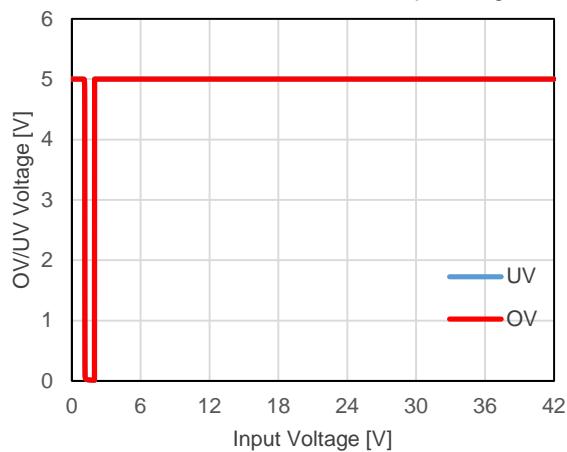



20) UV/OV Voltage vs. SENSE Voltage ($T_a = 25^\circ\text{C}$)
 $V_{UVSET} = 3.18\text{V}$, $V_{OVSET} = 3.43\text{V}$, Pull-up Voltage 5.0 V

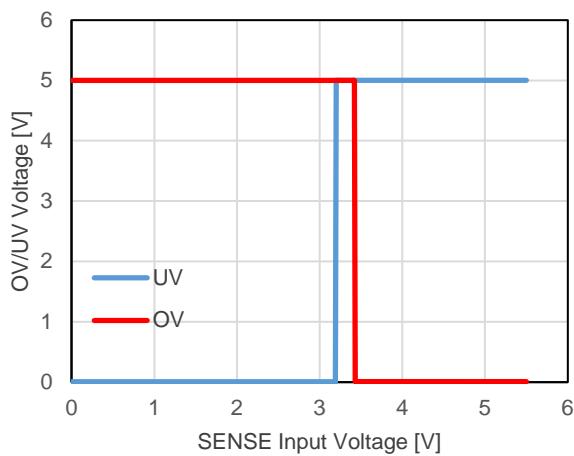

$V_{UVSET} = 4.83\text{V}$, $V_{OVSET} = 5.17\text{V}$, Pull-up Voltage 5.0 V


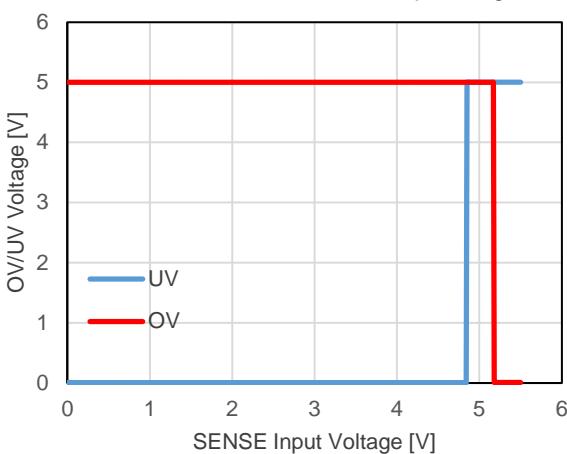


21) UV/OV Driver Output Current vs. Input Voltage
 $V_{UVSET} = 4.83\text{V}$, $V_{OVSET} = 5.17\text{V}$

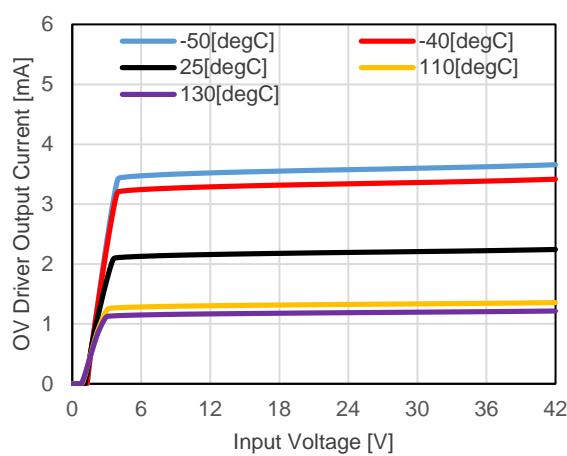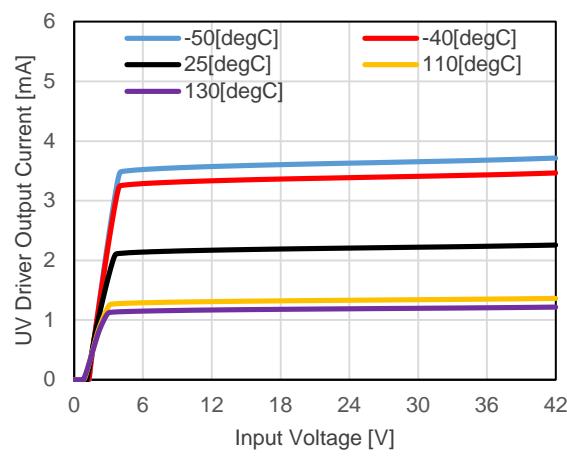


22) UV/OV Driver Output Current vs. V_{DS} ($T_a = 25^\circ C$)

$V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

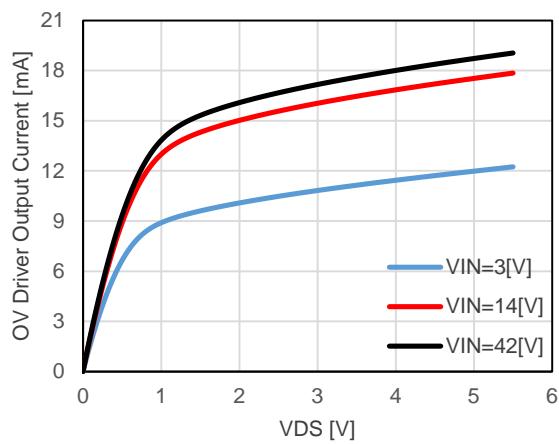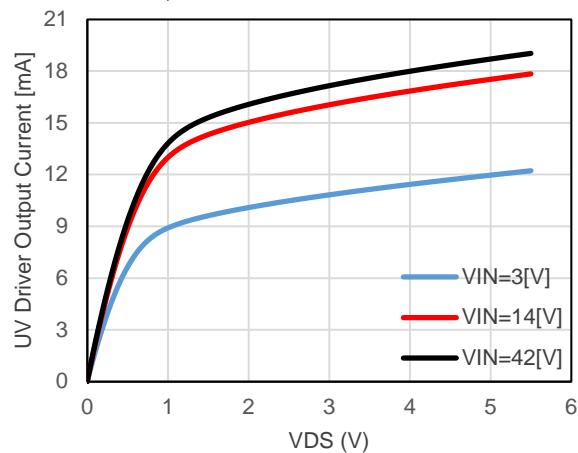


23) Release Delay Time vs. Temperature

$V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

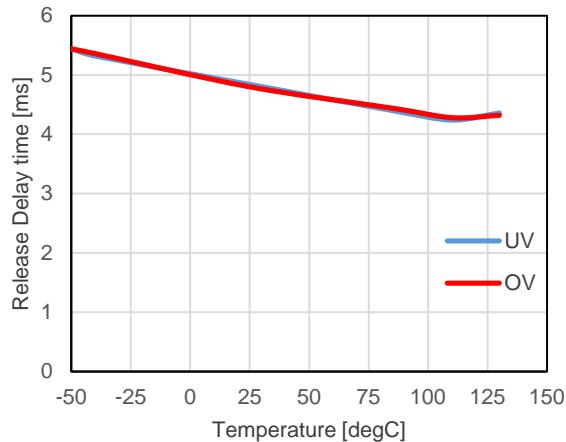



24) Detection Delay Time vs. Temperature


$V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

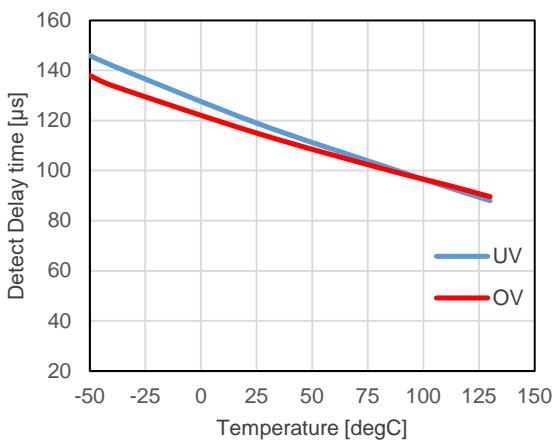


25) Release Delay Time vs. Input Voltage

$V_{UVSET} = 4.83V$, $V_{OVSET} = 5.17V$

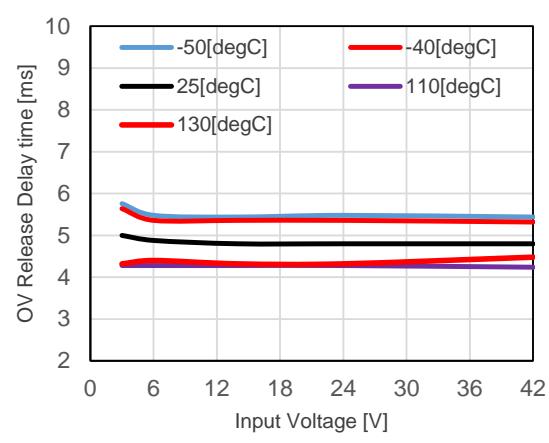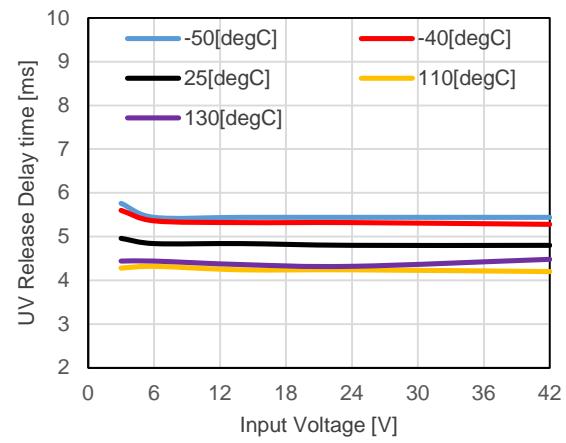

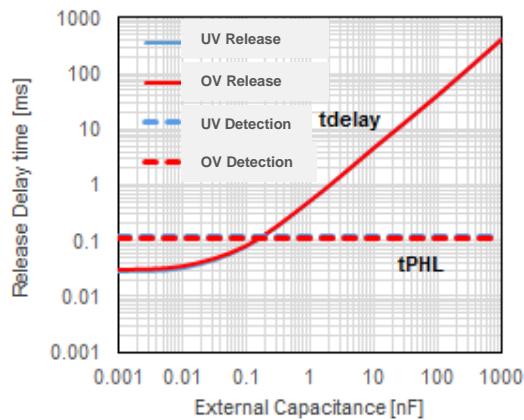26) Detection/Release Delay Time vs. External Capacitance for CD Pin (Ta =25 °C) $V_{UVSET} = 4.83V, V_{OVSET} = 5.17V$ **27) SENSE Pulse Width vs. SENSE Overdrive Voltage (Ta =25 °C)**

Limit Pulse of Release State

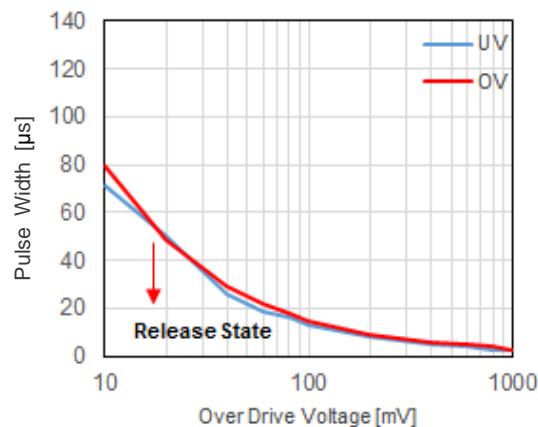 $V_{UVSET} = 4.83V, V_{OVSET} = 5.17V$ 

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51-7.

Measurement Conditions

Item	Measurement Conditions
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-Layer Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm
Copper Ratio	Outer Layer (First Layer): Less than 95% of 50 mm Square Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square
Through-holes	Ø 0.3 mm × 21 pcs


Measurement Result

(Ta = 25°C, Tjmax = 150°C)


Item	Measurement Result
Power Dissipation	3600 mW
Thermal Resistance (θ_{ja})	$\theta_{ja} = 34.5^\circ\text{C/W}$
Thermal Characterization Parameter (ψ_{jt})	$\psi_{jt} = 10^\circ\text{C/W}$

θ_{ja} : Junction-to-Ambient Thermal Resistance

ψ_{jt} : Junction-to-Top Thermal Characterization Parameter

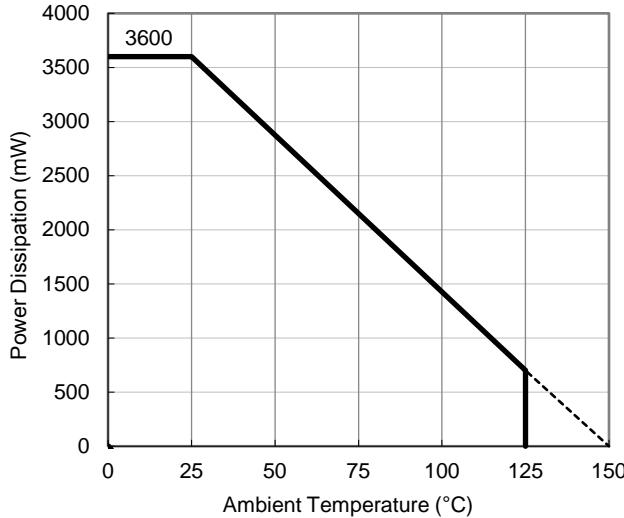


Power Dissipation vs. Ambient Temperature

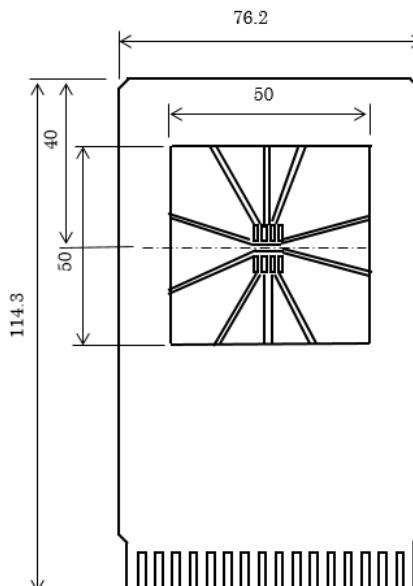

Measurement Board Pattern

PACKAGE DIMENSIONS

HSOP-8E

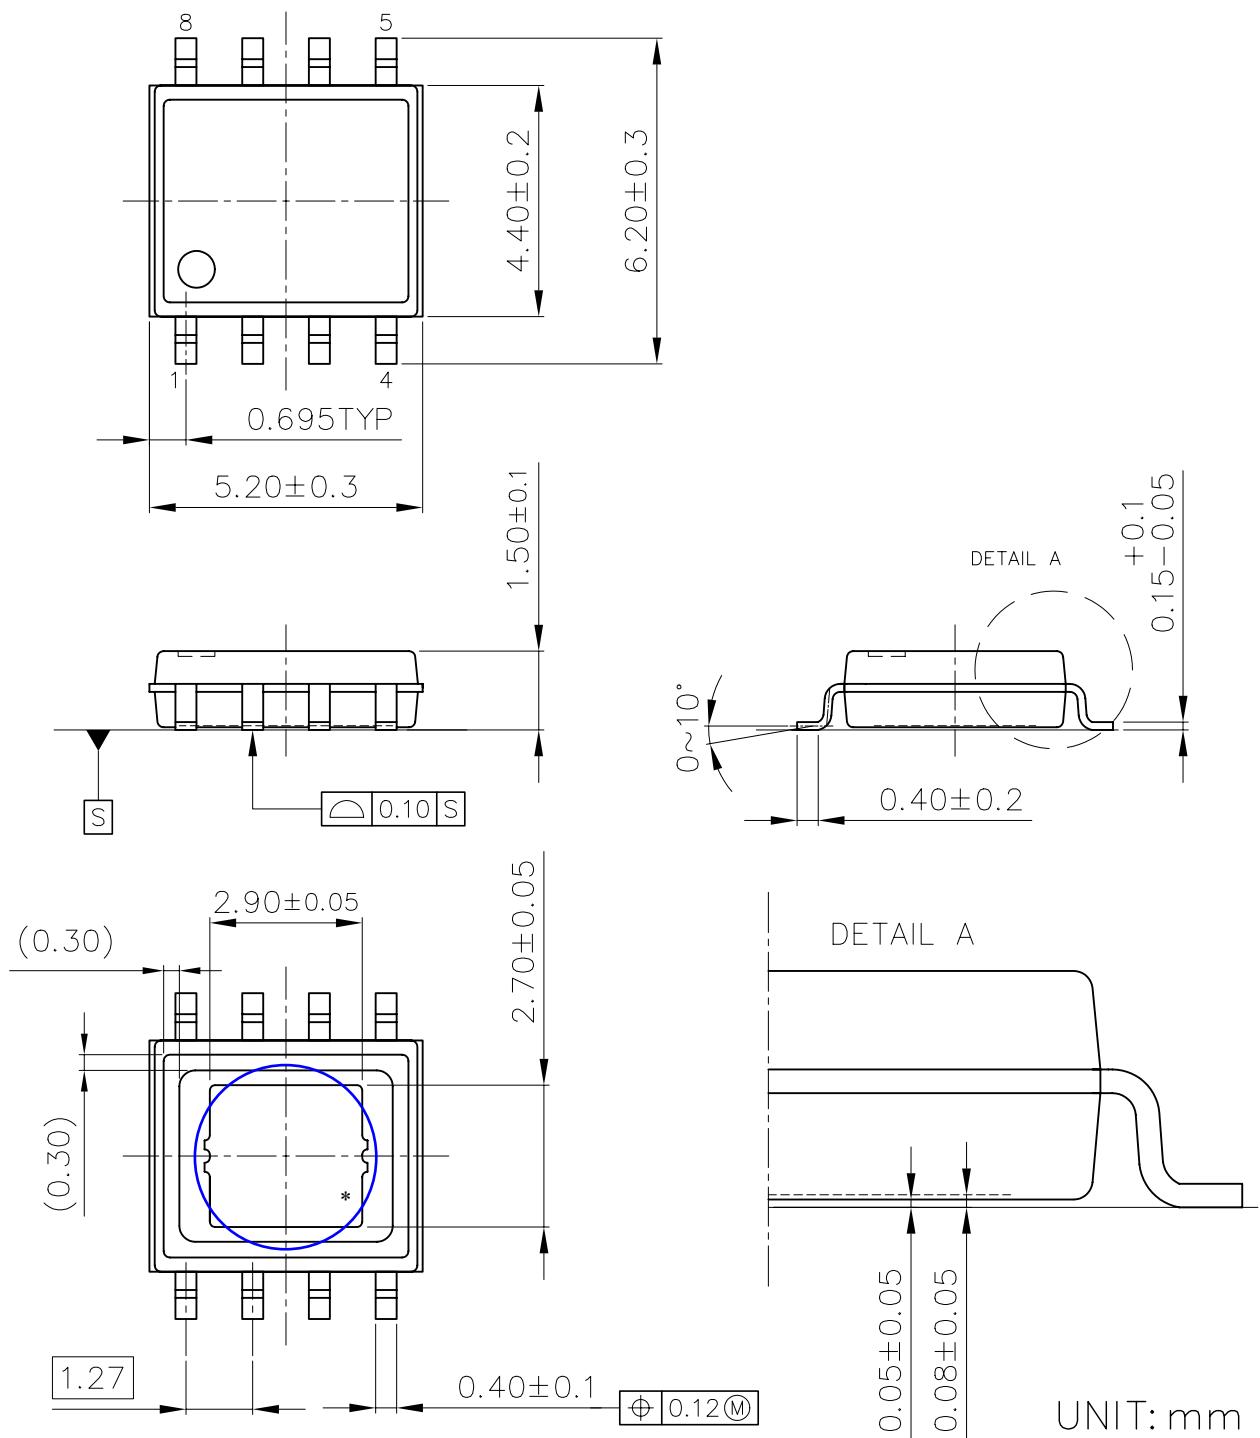

HSOP-8E Package Dimensions

* The tab on the bottom of the package shown by blue circle is substrate potential (GND). It is recommended that this tab be connected to the ground plane on the board but it is possible to leave the tab floating.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products in this document are designed for automotive applications. However, when using the products for automotive applications, please make sure to contact Ricoh sales representative in advance due to confirming the quality level.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used.
In the case of recognizing the marking characteristic with AOI, please contact Ricoh sales or our distributor before attempting to use AOI.
11. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

Official website

<https://www.n-redc.co.jp/en/>

Contact us

<https://www.n-redc.co.jp/en/buy/>