

KJD17 Series


High Amperage | Water Protection | 1 TON Heavy Duty | ON OFF Front Panel Mount | c UL us RoHS




Panel Cutout




Function Options




Remote Trip

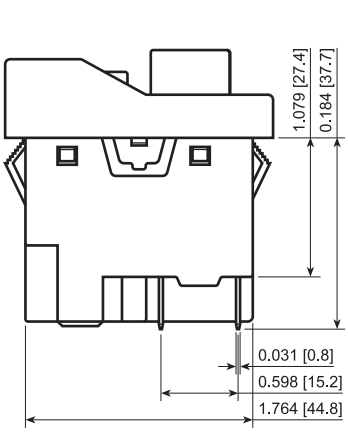


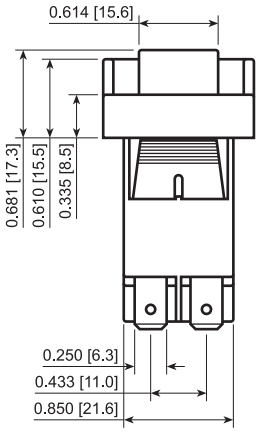

Water Protection Options



PVC Cap



PVC Cap & Gasket

FEATURES:

- Heavy Duty Industrial Design
- Electromagnet Provides Automatic Safety Protection Against Power Outages and Restarts
- PVC Cap for Dust and Water Protection

SPECIFICATIONS:

Rating: 16A 120VAC [cURus UL508]
16A 220/240VAC [cURus UL508]
1/2 HP 120VAC [cURus UL508]
2HP 220/240VAC [cURus UL508]

Temperature: -25°C to 55°C
Electrical Life: 10,000 Cycles
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100MΩ Min. at 500VDC
Dielectric Strength: 1,500VAC for 1 Minute
Ingress Protection: IP54 with PVC Cap

MATERIALS:

Body: Polyamide 6/6
Actuator: Polyamide 6/6
Contacts: Silver Alloy
Terminals: Silver Plated Brass



KJD17-22212-112

Series	Actuation Guard	Function	Voltage and Frequency	Marking Style	Water Protection	Bezel Color	Actuator Color	Marking Color
KJD17	**2** - Guarded	**1** - Off-On **2** - Off-On w/ Remote Trip **3** - NO+NC w/ Remote Trip	**1** - 120V~/50Hz **2** - 120V~/60Hz **3** - 230V~/50Hz **4** - 230V~/60Hz **5** - 240V~/50Hz **6** - 240V~/60Hz	**0** - None **1** - I/O Vert. **2** - I/O Horiz. **3** - O Only	**1** - None **2** - PVC Cover **3** - PVC Cover and Rubber Gasket	**1** - Black **6** - Yellow	**1** - Red/Green	**1** - Black **2** - White

EXAMPLE PART NUMBERS:

KJD17-21213-112 ***2P1T Off-On***
120V 60Hz., PVC Cap, I/O Vert.

KJD17-22213-112 ***2P1T Off-On***
120V 60Hz., Remote Trip, PVC Cap, I/O Vert.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE