



1. Dimensions:

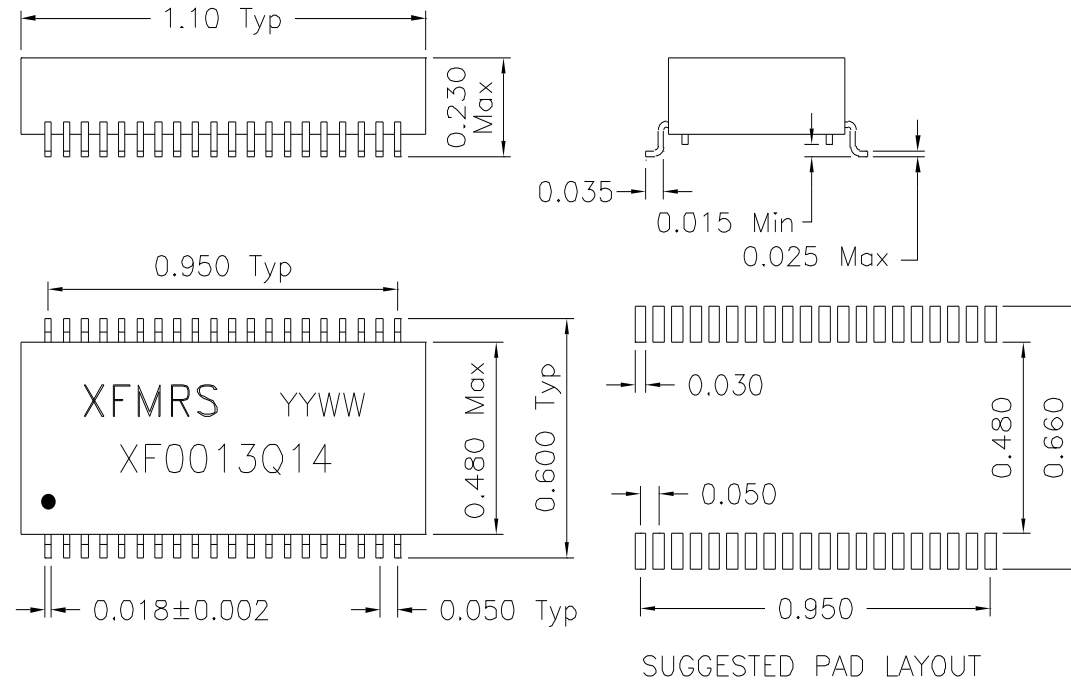

2. Schematic:

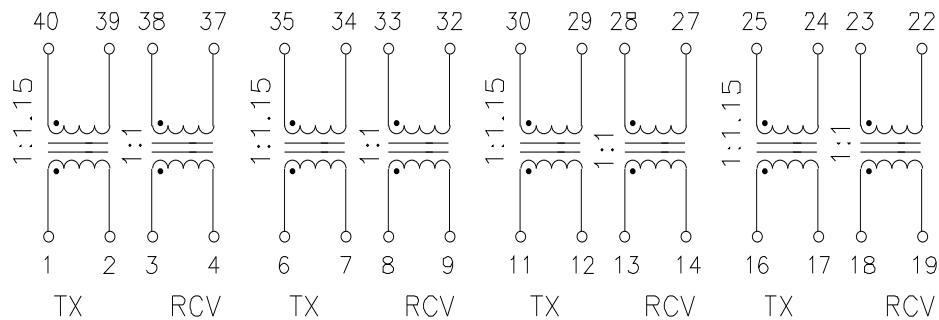

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms (PRI to SEC)

TX Turns Ratio: 1:1.15 (PRI:SEC)

RCV Turns Ratio: 1:1 (PRI:SEC)

PRI OCL: 1.50mH Typical @100KHz 50mV

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

PRI LL: 0.5uH Maximum @100KHz 50mV
(SEC Shorted)

Pri DCR: 0.80 Ohms Max

Crosstalk: -60dB Min (0.1 to 5MHz)

DOC. REV: A/1

XFMRS Inc		Title: T1/E1/CEPT QUAD PORT	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XFO013Q14		REV. A
	DWN.	李清儿	Feb-05-99
	CHK.	孙小松	Feb-05-99
	APP.	Joe Huff	Feb-05-99