

Optical Liquid Level Sensors D205 & D305 Series



- Features:
- * 1/2" BSPT Screw-in Body
 - * Low cost
 - * Compact size
 - * Wide range of commercial and industrial applications.





	Standard Temperature	High Temperature
Housing	1/2" BSPT Metal Body	
Output Function	Digital - High in Air	
Repeatability	± 1 mm	
Hysteresis	2mm (depending on liquid)	
Response Time: Rising Liquid	50 µS	
Response Time: Falling Liquid (Ethanol)	< 1 second	
Supply Voltage	+5V to 12VDC	
Supply Current	15 mA	
Temperature Range: Operating / (Storage)	-25°C to +80°C (-30°C to +85°)	-40°C to +125°C (-40°C to +125°C)
Housing Material	Stainless Steel or Nickel Plated Brass, Polysulphone dome	
Output Current (@25°C & 5VDC)	Sinks 10 mA	Sinks 40 mA
Lead wire Length	180mm PTFE	

Order Codes:

- D205000 Nickel Plated Brass Body, Standard Temperature Range ⁽¹⁾
- D205100 Nickel Plated Brass Body, Extended Temperature Range ⁽²⁾
- D305000 Stainless Steel Body, Standard Temperature Range ⁽¹⁾
- D305100 Stainless Steel Body, Extended Temperature Range ⁽²⁾

(1) Supplied with Nitrile washer and nut, unassembled. (2) Supplied with nut and VAMAC washer, unassembled. Contact factory for custom terminations and other lead lengths available to special order.

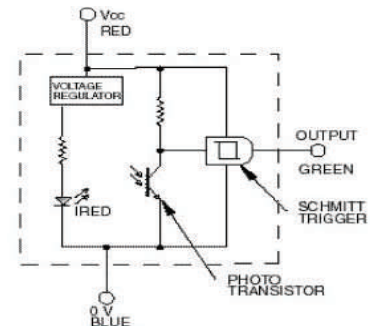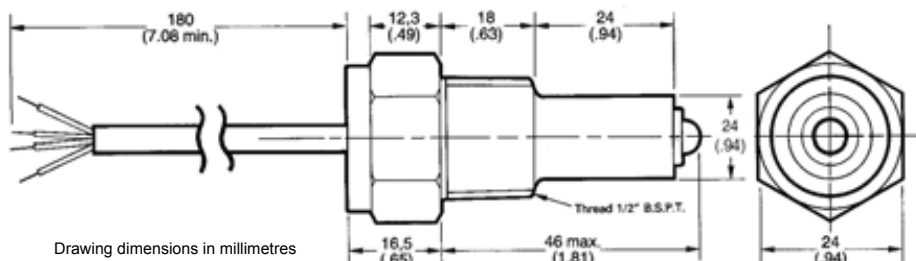

**American
Electronic
Components, Inc.**

© American Electronic Components Inc 2008

American Electronic Components Inc.,
1101 Lafayette Street, Elkhart, Indiana. USA
Tel: +1-574-295-6330 Fax: +1-574-293-8013
Email: sales@aecensors.com
<http://www.aecensors.com>