

Plug-in Signal Conditioners M-UNIT


PULSE DURATION TRANSMITTER

Functions & Features

- Converting a DC input into an output pulse
- The duration or "ON" time is linearly proportional to the input analog signal amplitude
- Frame duration adjustable
- High-density mounting

Typical Applications

- Transmission or telemetering
- Proportional ON-OFF control to operate solenoid valves or other similar final control elements



MODEL: MTD-[1]4-[2][3]

ORDERING INFORMATION

- Code number: MTD-[1]4-[2][3]
- Specify a code from below for each of [1] through [3]. (e.g. MTD-A4-K/Q)
- Special input range (For codes Z & 0)
- Specify the specification for option code /Q (e.g. /C01/S01)

[1] INPUT

Current

- A: 4 - 20 mA DC (Input resistance 250 Ω)
- A1: 4 - 20 mA DC (Input resistance 50 Ω)
- B: 2 - 10 mA DC (Input resistance 500 Ω)
- C: 1 - 5 mA DC (Input resistance 1000 Ω)
- D: 0 - 20 mA DC (Input resistance 50 Ω)
- E: 0 - 16 mA DC (Input resistance 62.5 Ω)
- F: 0 - 10 mA DC (Input resistance 100 Ω)
- G: 0 - 1 mA DC (Input resistance 1000 Ω)
- H: 10 - 50 mA DC (Input resistance 100 Ω)
- Z: Specify current (See INPUT SPECIFICATIONS)

Voltage

- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)

- 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
- 4W: -10 - +10 V DC (Input resistance 1 MΩ min.)
- 0: Specify voltage (See INPUT SPECIFICATIONS)

OUTPUT

- 4: 24 V voltage pulse

[2] POWER INPUT

AC Power

- K: 85 - 132 V AC (Operational voltage range 85 - 132 V, 47 - 66 Hz)
- L: 170 - 264 V AC (Operational voltage range 170 - 264 V, 47 - 66 Hz)

[3] OPTIONS

- blank: none
- /Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to M-System's web site.)

- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

TERMINAL SCREW MATERIAL

- /S01: Stainless steel

GENERAL SPECIFICATIONS

- Construction:** Plug-in
- Connection:** M3.5 screw terminals
- Screw terminal:** Chromated steel (standard) or stainless steel
- Housing material:** Flame-resistant resin (black)
- Frame duration:** 0.1 - 102.4 sec. adjustable
- Preselection:** Front-accessed rotary switch
- Fine adjustment:** Front-accessed potentiometer
- Isolation:** Input to output to power
- Zero adjustment:** 0 - 20 % (front)
- Span adjustment:** 80 to 100 % (front)

INPUT SPECIFICATIONS

- **DC Current:** Shunt resistor attached to the input terminals (0.5 W) Specify input resistance value for code Z.
- **DC Voltage:** -300 - +300 V DC
- Minimum span:** 10 mV
- Offset:** Max. 1.5 times span
- Input resistance**

Span 10 - 100 mV : $\geq 10 \text{ k}\Omega$

Span 0.1 - 1 V : $\geq 100 \text{ k}\Omega$

Span $\geq 1 \text{ V}$: $\geq 1 \text{ M}\Omega$

OUTPUT SPECIFICATIONS

■ Voltage Pulse

High pulse width: Duty cycle 0 - 100 %

High level: 24 V ± 2 V

Low level: 0 V ± 1 V

Maximum current: 50 mA at high level

Load resistance: 480 Ω min.

Output frames

PRESELECTION SWITCH POSITION (FR SEL)	ADJUSTABLE RANGE BY POTENTIOMETER (FRAME)
0	0.1 to 0.2 seconds
1	0.2 to 0.4 seconds
2	0.4 to 0.8 seconds
3	0.8 to 1.6 seconds
4	1.6 to 3.2 seconds
5	3.2 to 6.4 seconds
6	6.4 to 12.8 seconds
7	12.8 to 25.6 seconds
8	25.6 to 51.2 seconds
9	51.2 to 102.4 seconds

Ex-factory setting: Preselection Switch = 3, Frame = 1.0 sec., Zero/Span = Output 1 - 99% with the input 1 - 99%.

INSTALLATION

Power consumption

•AC: Approx. 2.5 VA

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

PERFORMANCE in percentage of span

Accuracy: ± 0.1 % or 1 msec., whichever is greater, with output duration 1 - 99 %

Temp. coefficient: ± 0.015 %/°C (± 0.008 %/°F)

Response time: ≤ 0.5 sec. (0 - 90 %)

Line voltage effect: ± 0.1 % over voltage range

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC


Dielectric strength: 1000 V AC @1 minute

(input to output to power)


2000 V AC @1 minute

(input or output or power to ground)

EXTERNAL VIEW

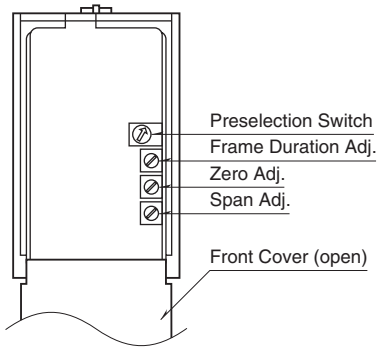


EXTERNAL DIMENSIONS unit: mm (inch)

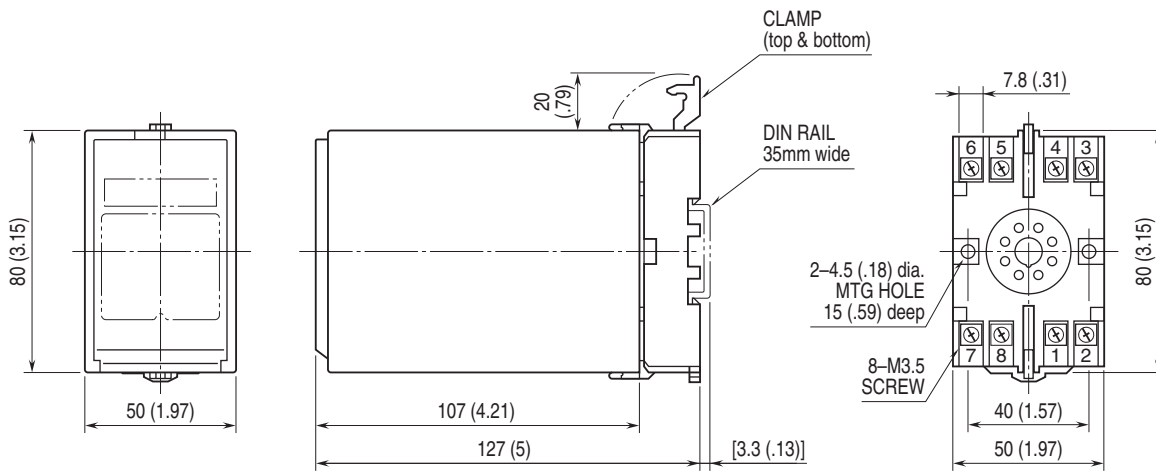


• When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS unit: mm (inch)

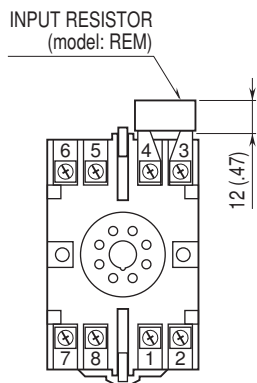

Input shunt resistor attached for current input.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

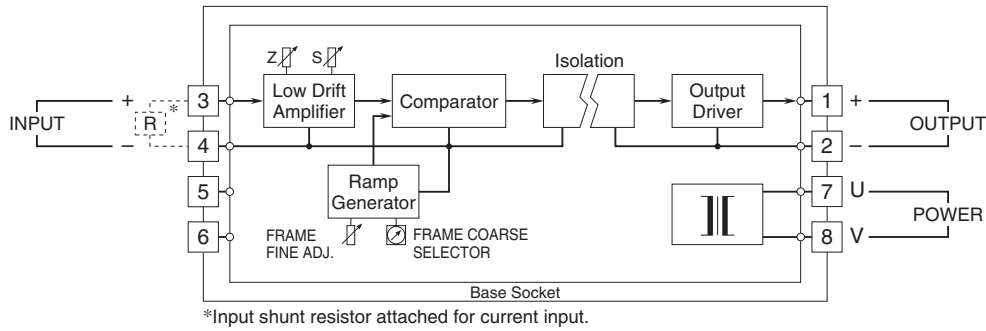

Specifications are subject to change without notice.