


HIGH CURRENT SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Output Current :-800mA.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRA221S	1	1
KRA222S	2.2	2.2
KRA223S	4.7	4.7
KRA224S	10	10
KRA225S	1	10
KRA226S	2.2	10

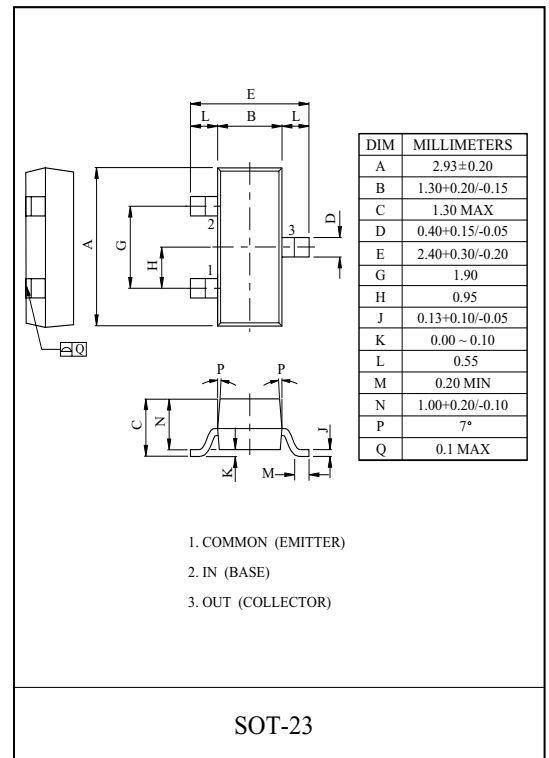


MAXIMUM RATING (Ta=25 $^{\circ}$ C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Output Voltage	V_O	-50	V
Input Voltage	V_I	-10, 10	V
		-12, 10	
		-20, 10	
		-30, 10	
		-10, 5	
		-12, 6	
Output Current	I_O	-800	mA
Power Dissipation	P_D	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	

MARK SPEC

TYPE	KRA221S	KRA222S	KRA223S	KRA224S	KRA225S	KRA226S
MARK	PQ	PR	PS	PT	PU	PV

Marking






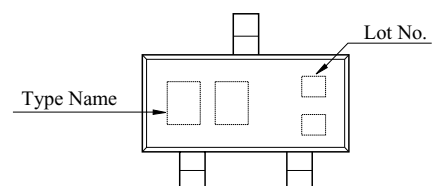


KRA221S~KRA226S







ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA221S 226S	$I_{O(OFF)}$	$V_O=-30V, V_I=0$	-	-	-10	μA
DC Current Gain	KRA221S	G_I	$V_O=-5V, I_O=-50mA$	33	-	-	
	KRA222S			39	-	-	
	KRA223S			47	-	-	
	KRA224S			56	-	-	
	KRA225S			56	-	-	
	KRA226S			56	-	-	
Output Voltage	KRA221S 226S	$V_{O(ON)}$	$I_O=-50mA, I_I=-2.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA221S	$V_{I(ON)}$	$V_O=-0.3V, I_O=-20mA$	-	-	-3.0	V
	KRA222S			-	-	-3.0	
	KRA223S			-	-	-3.0	
	KRA224S			-	-	-3.0	
	KRA225S			-	-	-3.0	
	KRA226S			-	-	-2.0	
Input Voltage (OFF)	KRA221S 224S	$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-0.5	-	-	V
	KRA225S 226S			-0.3	-	-	
Transition Frequency	KRA221S 226S	f_T^*	$V_O=-10V, I_O=-5mA, f=100MHz$	-	200	-	MHz
Input Current	KRA221S	I_I	$V_I=-5V$	-	-	-7.2	mA
	KRA222S			-	-	-3.8	
	KRA223S			-	-	-1.8	
	KRA224S			-	-	-0.88	
	KRA225S			-	-	-7.2	
	KRA226S			-	-	-3.6	
Input Resistor	KRA221S	R1	-	0.1	1	1.3	k
	KRA222S			1.54	2.2	2.86	
	KRA223S			3.29	4.7	6.11	
	KRA224S			7	10	13	
	KRA225S			0.7	1	1.3	
	KRA226S			1.54	2.2	2.86	
Resistor Ratio	KRA241S~244S	R2/R1	-	0.8	1.0	1.2	
	KRA245S			8	10	12	
	KRA246S			3.6	4.5	5.5	

KRA221S~KRA226S

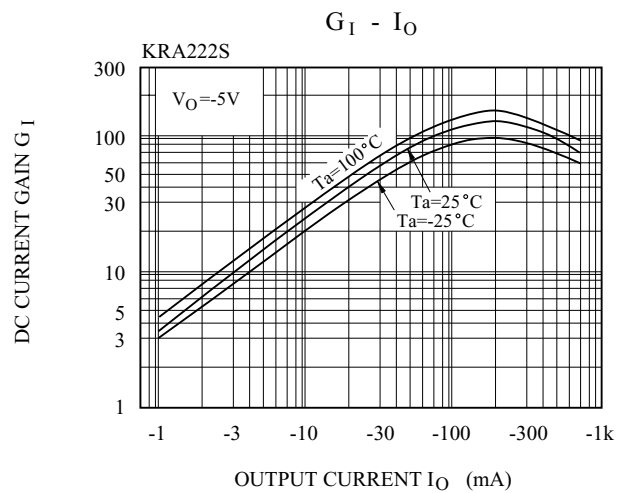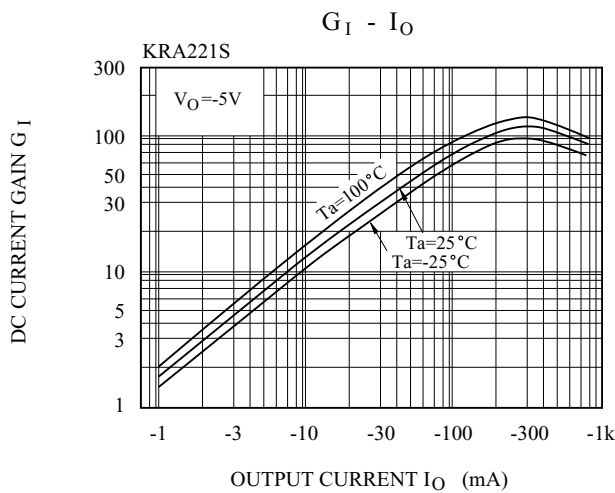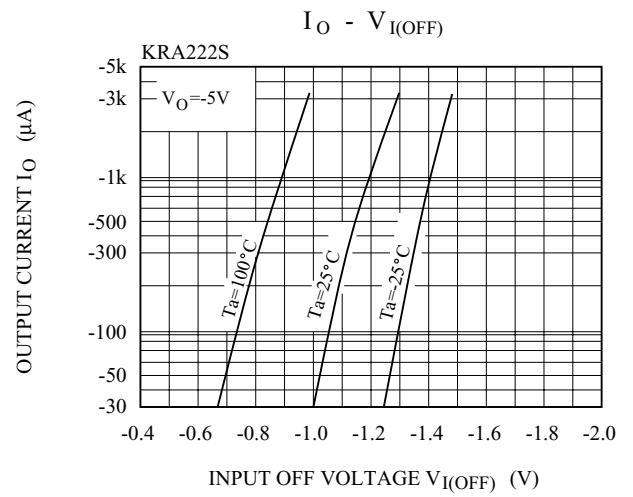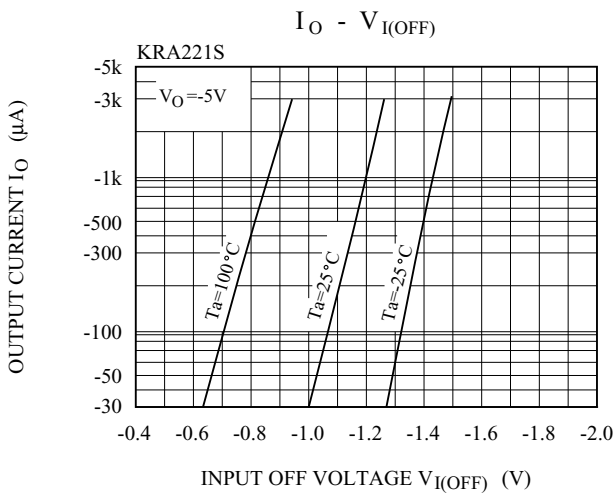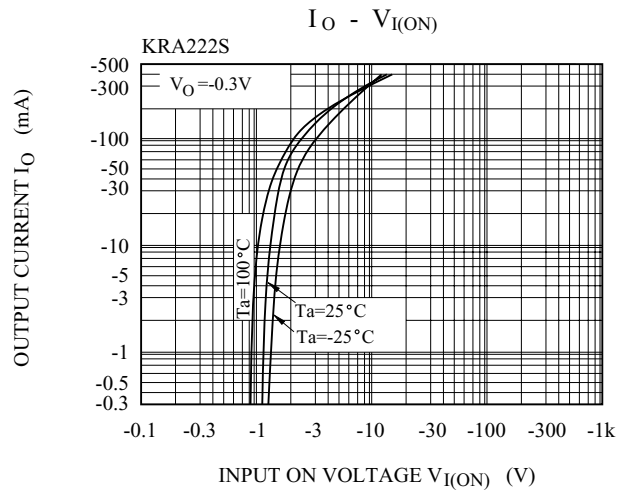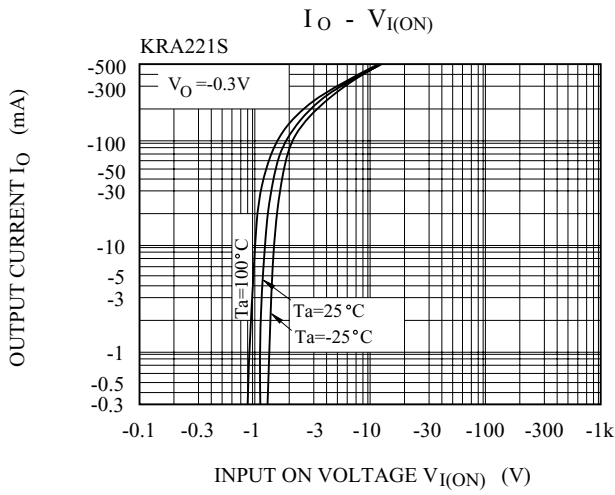

KRA221S~KRA226S

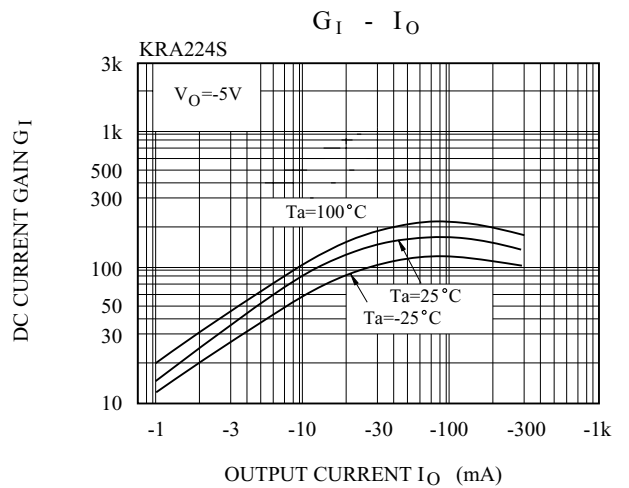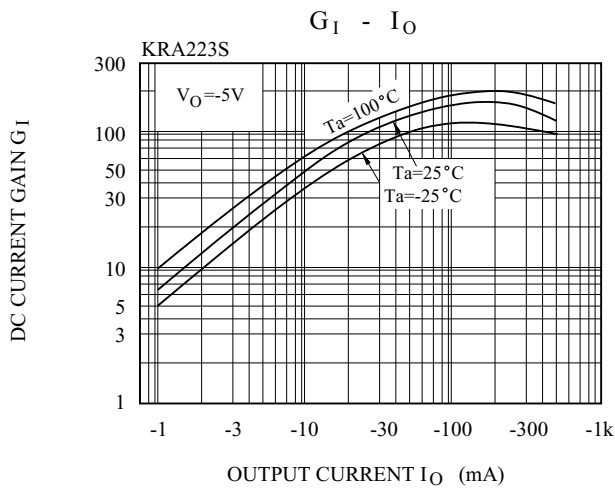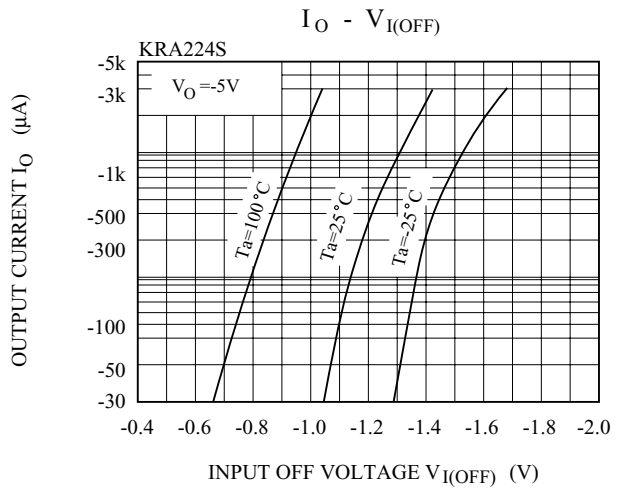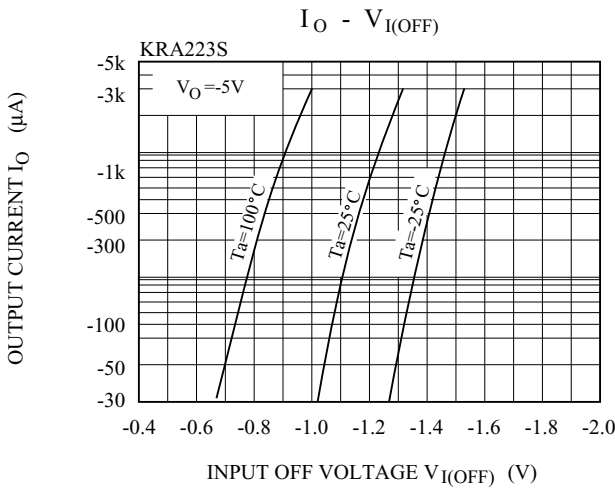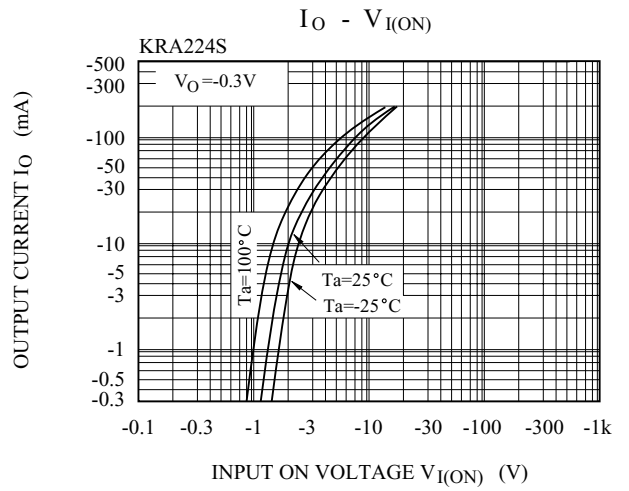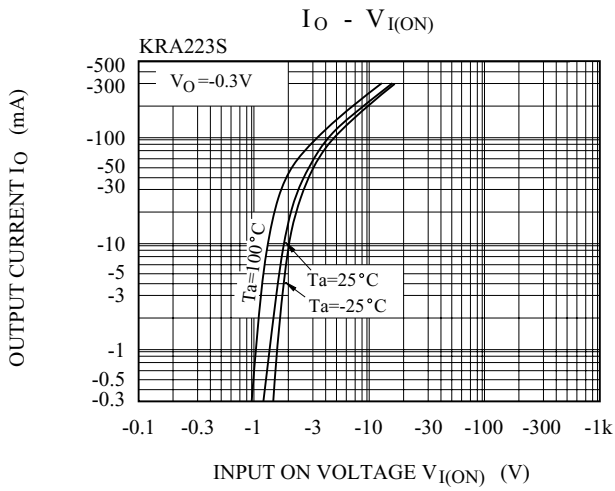

KRA221S~KRA226S

