

Powerex General Purpose Rectifier Diode Elements are for low forward voltage drop to minimize conduction losses. They are made with molybdenum anode and cathode contacts to minimize thermal stresses during operation. They can be mounted directly to an air or water cooled heat exchangers to achieve high current handling capability.

FEATURES:

- Low On-State Voltage
- Excellent Surge and I^2t Ratings

APPLICATIONS:

- DC Power Supplies
- Welding Supplies
- Plating Supplies

ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.
 Example: RAXSMD0480XX is a 400V 8,000A General Purpose diode element with a typical reverse recovery time of 25 μ s.

PART	Voltage Rating $V_{DRM} - V_{RRM}$	Voltage Code	Current Rating I_{avg}	Current Code	Reverse Recovery t_{RR}	Lead Code
RAXSMD	400V	04	8000A	80	XX	OO
					25 μ s typical	

Revised: 9/23/2009

Absolute Maximum Ratings

Characteristic	Symbol	Rating	Units
Repetitive Peak Reverse Voltage	V_{RRM}	400	Volts
Average On-State Current, $T_S=84^\circ\text{C}$	$I_{F(Avg.)}$	8000	A
RMS On-State Current, $T_S=84^\circ\text{C}$	$I_{F(RMS)}$	12566	A
Peak One Cycle Surge Current, 60Hz, $V_R=V_{RRM}$	I_{FSM}	55,000	A
Fuse Coordination I^2t , 60Hz	I^2t	1.26E+07	A ² s
Peak One Cycle Surge Current, 50Hz, $V_R=0V$	I_{FSM}	50,875	A
Fuse Coordination I^2t , 50Hz	I^2t	1.29E+07	A ² s
Operating Temperature	T_j	-40 to+175	$^\circ\text{C}$
Storage Temperature	$T_{Stg.}$	-50 to+200*	$^\circ\text{C}$
Approximate Weight		0.3 0.14	lb Kg
Mounting Force		9,000 - 11,000 40 - 48.9	lbs Knewtons

* Limit to 50 $^\circ\text{C}$ prior to assembly.**Mounting Recommendations**

Contact surfaces of this diode element are subject to oxidation at high temperatures. It is recommended that these elements be sealed in the assembly using an o-ring or similar sealing mechanism. Contacts can be further protected by coating with a thin layer of high temperature silicon based oil.

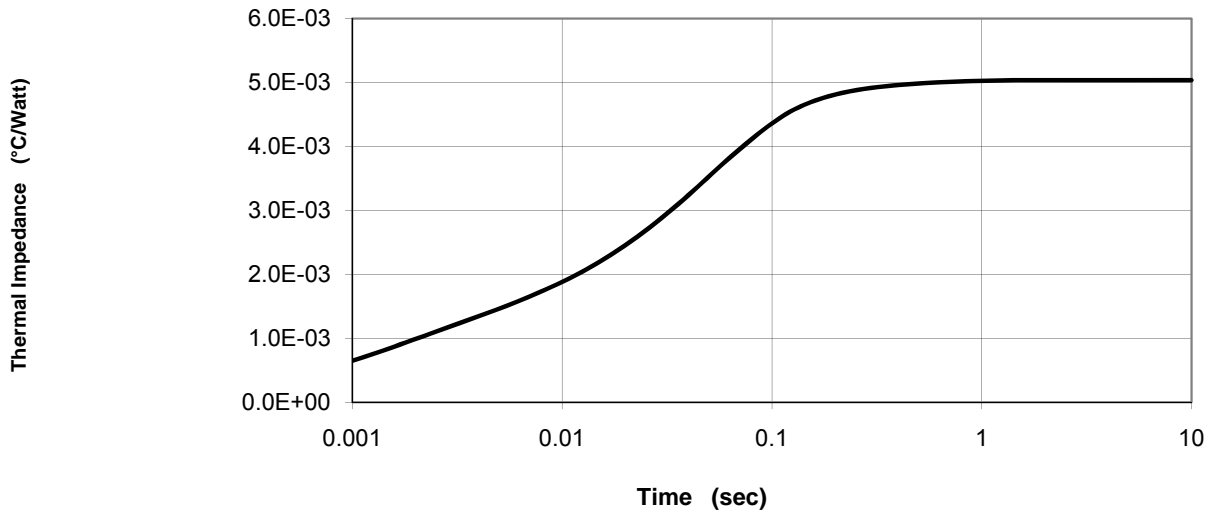
Information presented is based upon manufacturers testing and projected capabilities. This information is subject to change without notice. The manufacturer makes no claim as to suitability for use, reliability, capability or future availability of this product.

Electrical Characteristics, Tj=25°C unless otherwise specified

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Repetitive Peak Reverse Leakage Current	I_{RRM}	Tj=175°C, V_{RRM} =Rated		15	60	ma
Peak On-State Voltage	V_{FM}	Tj=25°C, I_{FM} =4000A			1.05	V
V_{FM} Model, Low Level	V_0	Tj=175°C			0.642	V
$V_{FM} = V_0 + r \cdot I_{FM}$	r	15% I_{FM} - $\pi \cdot I_{FM}$			2.28E-05	Ω
Reverse Recovery Time	t_{RR}	Tj=25°C, I_{FM} =400A $di_R/dt = 25 A/\mu s$		25		μs

Thermal Characteristics

Characteristic	Symbol	Test Conditions	Rating			Units	
			min	typ	max		
Thermal Resistance							
Junction to Case	$R\theta_{jc}$	Double side cooled			0.005	°C/Watt	
Case to Sink	$R\theta_{cs}$	Double side cooled			0.003	°C/Watt	
Thermal Impedance Model	$Z\theta_{jc}$	Double side cooled					
$Z\theta_{jc}(t) = \Sigma(A(N) \cdot (1 - \exp(-t/\text{Tau}(N))))$		where:	N =	1	2	3	4
			A(N) =	8.117E-04	4.774E-04	3.402E-03	3.423E-04
			Tau(N) =	1.112E-03	4.481E-03	4.894E-02	2.710E-01

MAXIMUM TRANSIENT THERMAL IMPEDANCE**Maximum On-State Voltage Drop**