



USB B Female

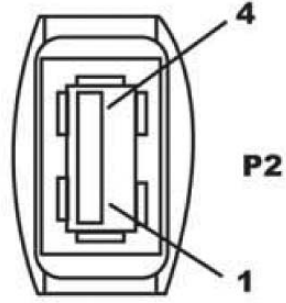

USB A Female

PIN Out

(P1)		(P2)
1	_____	1
2	_____	2
3	_____	3
4	_____	4
Shell	_____	Shell

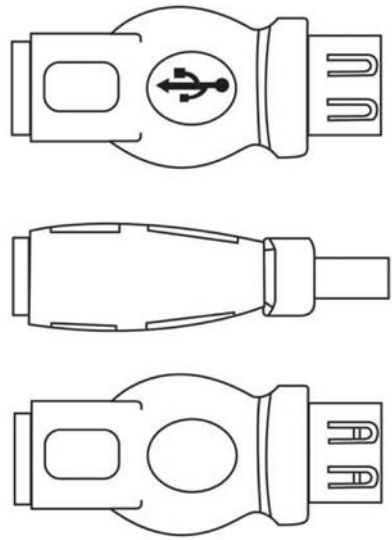

Material:

- Jump Wire: Non-UL 26AWG(7/0.16) Tinned Copper
- Connector:
 - P1: USB B Female Gold Flash Contact, Nickel Plated Shell
 - P2: USB A Female Gold Flash Contact, Nickel Plated Shell
 - Plastic: White
- Hood: Molded Type PVC 45 P
- Color: Beige

Electrical:

- 100% Open, short & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.

Scale	1:1						Name
TOLERANCE					Drawn	10.19.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						



Item No.	
A-USB-1-R	
Title	
USB B Female <=> USB A Female Adapter	
Drawing No.	
	rev00
Replace	Sheet