

CAPACITORS

- Very high CV value
- Standard snap-in pin style
- 2000 hour long-life grade

The CLP is a snap-in electrolytic capacitor featuring the very highest volumetric efficiency ever offered by Dubilier.

The product is suitable for all applications requiring high CV values, and the high-voltage parts are particularly suited to SMPS units.

ALUMINIUM ELECTROLYTIC STANDARD TEMP. SNAP-IN CLP



SECTION 1

SPECIFICATION

Item	Performance Characteristics							
Voltage Range	16~100V			160~450V				
Capacitance Range	470~68000μF			47~2700μF				
Temperature Range	-40~ +85°C			-25~ +85°C				
Capacitance Tolerance	-20~ +20°C (at 20°C, 120Hz)							
Leakage Current	1=0.02CV (μA) (After 5 minutes)							
Dissipation Factor (tan δ)	Rated Voltage(v)	16	25	35~50	63~100	160~200	250~450	
	D.F(%)	40	35	35	20	10*	15	
	Note * (15%) for case size D L (mm) = 35x20							
	The Value of D.F(%) is increased by 2% for every addition of 1000μF							
	Rated Voltage(v)	16	25	35	05-63	80-100	160-400	450
	Z(-25°C)/Z(20°C)	5	4	4	3	3	4	8
	Z(-40°C)/Z(20°C)	18	15	10	10	10	8	-
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2000 hours at 85°C.							
	Capacitance Change	Within ± 20% of initial value						
	D.F. tan δ	200% or less of initial specified value						
	Leakage Current	Initial specified value or less						
Shelf Life	At 85°C no voltage applied after 500 hours the capacitors shall meet the following limits							
	Capacitance Change	≤ ± 20% of initial value						
	Dissipation Factor	≤ 150% of initial specified value						
	Leakage Current	Not exceed initial specified value						

ORDERING INFORMATION

CLP	1000	CF	200
Range	Capacitance	Case code (see below)	Voltage
Two letter case code CF = 30mm dia. x 45mm height.			
Diameter	Height (length)		
A = 22.4mm	A = 20mm		
B = 25mm	B = 25mm		
C = 30mm	C = 30mm		
D = 35.5mm	D = 35mm		
	E = 40mm		
	F = 45mm		
	G = 50mm		

CAPACITORS

ALUMINIUM ELECTROLYTIC STANDARD TEMP. SNAP-IN CLP


AMBIENT TEMP./MULTIPLYING FACTOR

Temperature coefficient				
Temperature (°C)	45	60	70	85
Factor	1.48	1.42	1.30	1.00

FREQUENCY/MULTIPLYING FACTOR

Frequency coefficient					
Frequency (Hz)	50	60	120	1K	10K-00K
6.3-100V	0.88	0.90	1.00	1.15	1.16
160-250V	0.75	0.78	1.00	1.16	1.23
350-450V	0.74	0.76	1.00	1.10	1.15

OUTLINE DRAWING

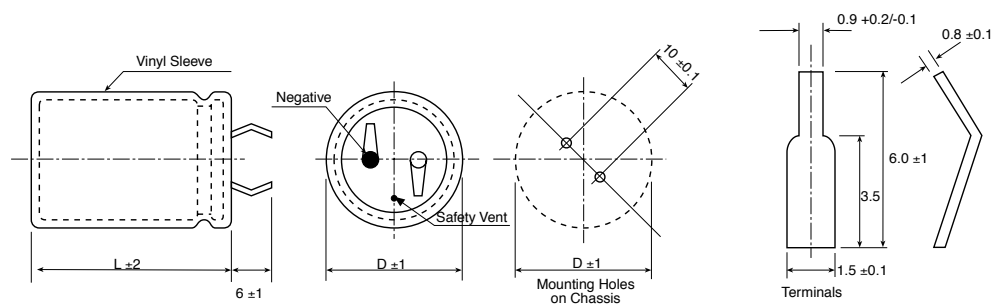

RANGE

W.V.	Cap [μF]	Case Size øDxL[mm]	Max Ripple Current [A] rms (120Hz/85°C)
16V	10000	22.4x30	2.60
		25x25	
	15000	22.4x35	3.30
		25x30	
	18000	22.4x40	3.70
		25x30	
	22000	25x40	4.20
		30x30	
	27000	25x45	4.65
		30x35	
	33000	30x40	5.60
		35.5x30	
	39000	30x45	6.00
		35.5x35	
	47000	30x50	6.80
		35.5x40	
25V	5600	22.4x25	2.00
	6800	22.4x30	2.30
		25x25	
	8200	25x25	2.70
		25x30	
	10000	30x25	2.80
		30x30	
	15000	22.4x50	3.70
		25x40	
	18000	25x45	4.20
		30x35	
	22000	30x40	4.80
	27000	30x45	4.98

W.V.	Cap [μF]	Case Size øDxL[mm]	Max Ripple Current [A] rms (120Hz/85°C)
25V	33000	30x50	6.50
		35.5x40	
	39000	35.5x45	7.50
35V	3300	22.4x25	1.80
	3900	22.4x30	2.10
		22.4x30	
	4700	22.4x30	2.20
		25x25	
	6800	25x30	2.60
	10000	25x40	3.10
		30x30	
	15000	25x50	4.10
		30x40	
	18000	30x45	4.60
		35.5x40	
	22000	30x50	5.30
		35.5x40	
	27000	35.5x50	6.9
50V	2200	22.4x25	1.70
		22.4x30	
	2700	22.4x30	1.93
		22.4x40	
	4700	22.4x40	2.40
		25x35	
	6800	30x30	3.80
		30x45	
	10000	35.5x35	4.80

W.V.	Cap [μF]	Case Size øDxL[mm]	Max Ripple Current [A] rms (120Hz/85°C)
50V	15000	35x45	3.80
		35.5x40	
	22000	35.5x50	6.70
		35.5x40	
63V	1500	22.4x25	1.60
	2200	22.4x30	2.0
		25x25	
	2700	22.4x35	2.30
		25x30	
	3300	22.4x40	2.30
		25x30	
		30x25	
	3900	22.4x45	2.50
		25x35	
		30x30	
	4700	22.4x50	3.30
		25x40	
		35.5x25	
	6800	30x40	3.60
		35.5x30	
	8200	30x45	4.80
		35.5x35	
	10000	35.5x40	4.80
80V	1500	22.4x30	1.70
		22.4x35	
	1800	22.4x35	1.90
		25x30	
	2200	22.4x40	2.1
		25x30	
		30x25	
	2700	22.4x45	2.50
		25x35	
		30x30	
	3300	22.4x50	2.80
		25x40	
		30x30	
	3900	25x45	3.10
		30x35	

Other values/ sizes by request

CAPACITORS

ALUMINIUM ELECTROLYTIC STANDARD TEMP. SNAP-IN CLP

SECTION 1

W.V.	Cap [μF]	Case Size øDxL[mm]	Max Ripple Current [A] rms (120Hz/85°C)
80V	4700	25x50	3.60
		30x40	
	6800	30x50	4.10
		35.5x40	
100V	1000	22.4x30	1.40
		25x25	
	1500	22.4x40	1.70
		25x30	
		30x25	
		30x25	
	1800	22.4x45	2.10
		25x35	
		30x30	
	2200	22.4x50	2.20
		25x40	
		30x30	
	2700	25x45	2.64
		30x35	
	3300	25x50	3.0
		30x40	
	3900	30x45	3.40
		35.5x35	
	4700	30x50	4.01
160V	470	22.4x30	1.70
		25x25	
	680	22.4x40	2.10
		30x25	
	1000	25x45	2.70
		30x35	
		35.5x30	
	1500	30x45	3.50
		35.5x35	
	1800	30x50	3.90
		35.5x40	
200V	470	22.4x35	1.80
		25x30	
		30x25	
	1000	25x50	2.80
		30x40	
		35.5x30	
	1500	30x50	3.80
		35.5x40	
	1800	35.5x45	3.79
		35.5x45	
250V	220	22.4x30	1.15
		25x25	
	330	22.4x35	1.40
		25x30	
		30x25	

W.V.	Cap [μF]	Case Size øDxL[mm]	Max Ripple Current [A] rms (120Hz/85°C)
250V	470	22.4x45	1.80
		25x40	
		30x30	
	1000	30x50	3.00
		35.5x40	
400V	47	22.4x25	0.45
		22.4x25	
	68	22.4x25	0.55
		22.4x25	
	100	22.4x30	0.70
		25x25	
	220	22.4x50	1.10
		25x40	
		30x30	
	330	30x40	1.60
450V	470	35.5x45	2.10
	47	22.4x25	0.50
		22.4x35	
		25x30	
	220	25x50	1.20