



SS22M - SS23M 2.0AMPS. Surface Mount Schottky Barrier Rectifiers Micro SMA

Features

- Very low profile - typical height of 0.68mm
- Ideal for automated placement
- Low forward voltage drop. Low power loss.
- High efficiency
- Meet MSL level 1, per J-STD-020D, lead free maximum peak of 260°C
- Solder dip 265°C max. 10 s, per JESD 22-A111
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition
- Green compound

Typical Application

- For use in low voltage high frequency inverter, freewheeling, DC to DC converter, and polarity protection applications.

Mechanical Data

- Case: Micro SMA
- Molding Compound meet UL 94V-0 rate flame flammability rating.
- Terminals: Matte tin plated leads, solderable per J-STD-002B, and JESD22-B102D
- Polarity: Indicated by Cathode Band
- Packaging: 8 mm tape per EIA Std RS-481
- Weight: 0.006 grams

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.



Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SS22M	SS23M	Units
Device Marking Code		D	E	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	V
Maximum Average Forward Rectified Current	I _{F(AV)}	2		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I _{FSM}	25		A
Maximum Instantaneous Forward Voltage (Note 1) @ 1.0A / TA=25℃ @ 2.0A / TA=25℃ @ 1.0A / TA=125℃ @ 2.0A / TA=125℃	V _F	TYP.	MAX.	V
		0.45	-	
		0.53	0.60	
		0.37	-	
		0.50	0.55	
Maximum Reverse Current @ TA=25 ℃ @ TA=125 ℃	I _R	TYP.	MAX.	uA mA
		6	150	
		4	15	
Typical Junction Capacitance (Note 2)	C _j	35		pF
Typical Thermal Resistance	R _{θJA}	105		°C/W
	R _{θJL}	15		
	R _{θJC}	20		
Operating Temperature Range	T _J	-55 to + 150		°C
Storage Temperature Range	T _{STG}	-55 to + 150		°C

Note1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note2: Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

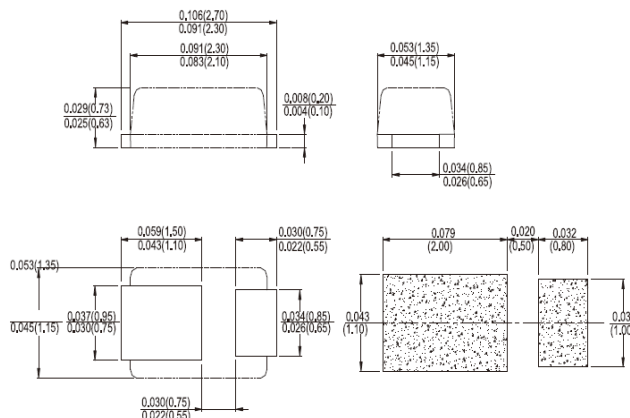

Dimensions in inches and (millimeters)

Marking Diagram



- X = Device Marking Code
- Y = Year
- M = Work Month

RATINGS AND CHARACTERISTIC CURVES (SS22M THRU SS23M)

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

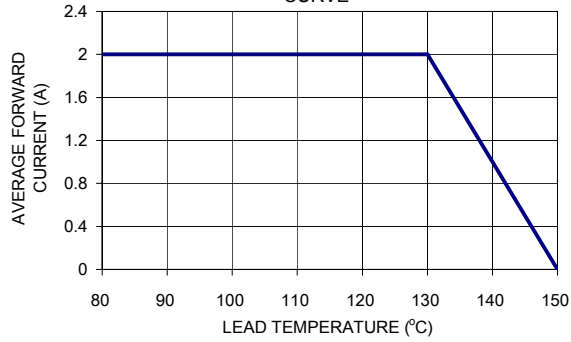


FIG. 2 MAXIMUM FORWARD SURGE CURRENT

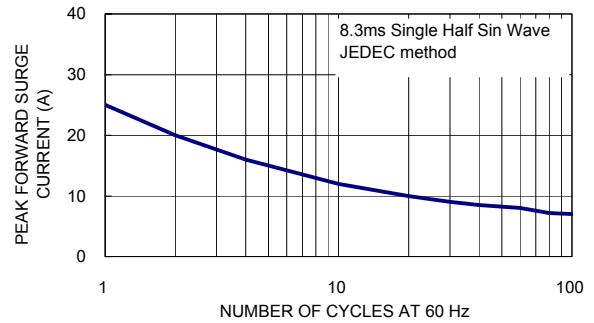


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

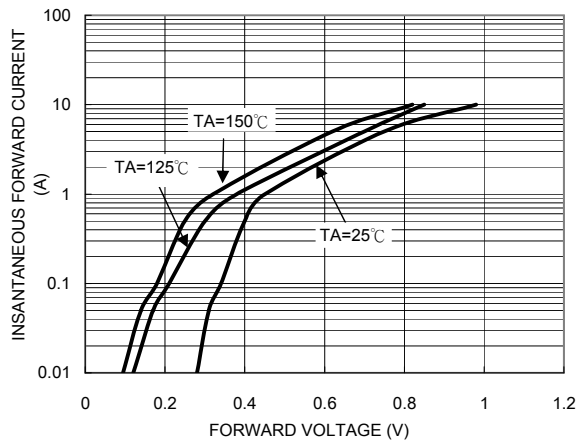


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

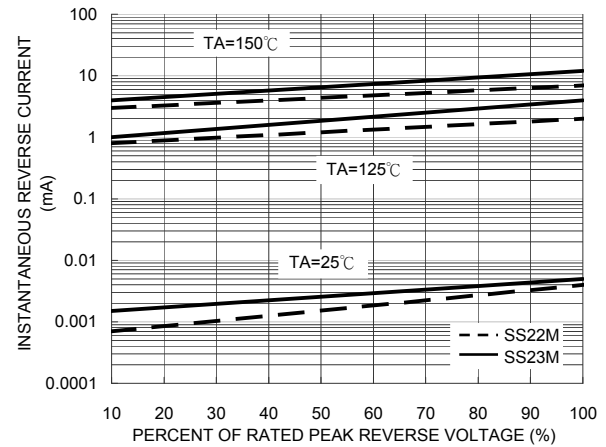


FIG. 5 TYPICAL JUNCTION CAPACITANCE

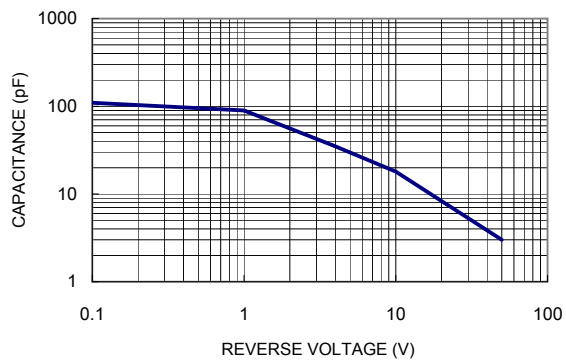


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE

