

KR Electronics

General Description


KR 2792-2-BNC is a 2 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 1.1 MHz and is designed for a source and load impedance of 50 Ω . Other passband frequencies are available. Please consult the factory.

Features


- 2 MHz Center Frequency
- 50 Ω Source and Load
- BNC Connectors

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 100 nsec/div)

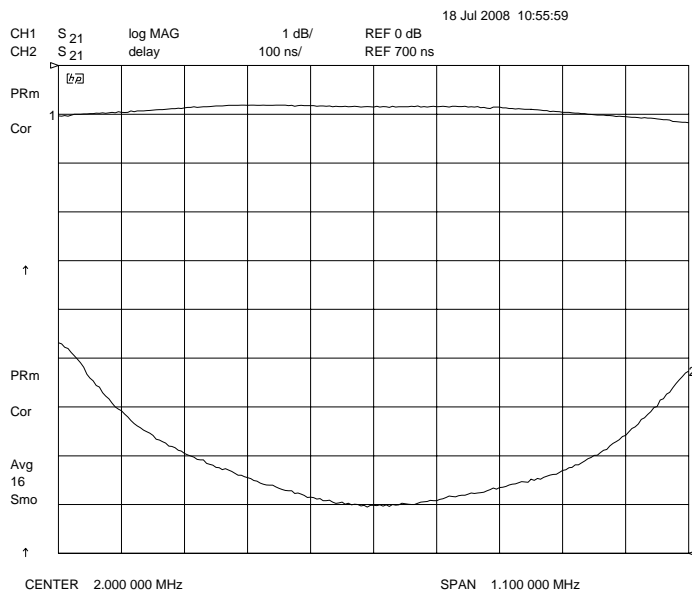

Overall Response
(10 dB/div)

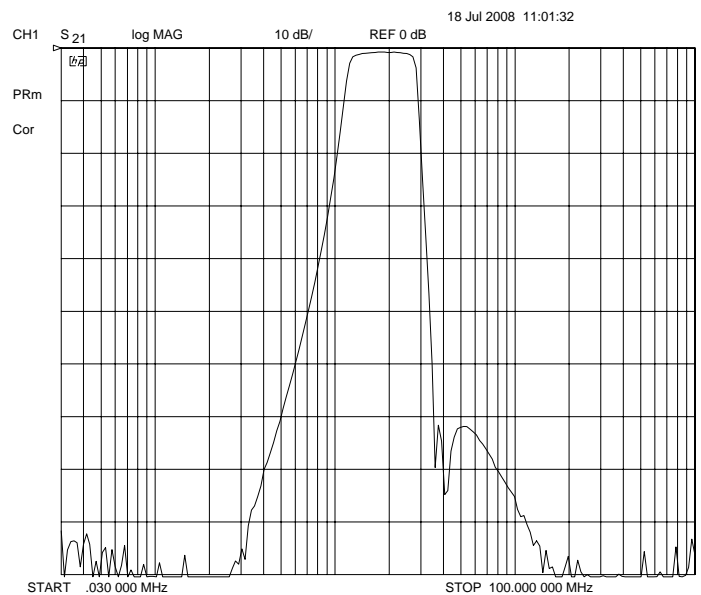

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2792-2-BNC

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	2 MHz
Insertion Loss	< 2.5 dB (1 dB typical)
3 dB Bandwidth	1.1 MHz minimum (1.6 MHz typical)
Attenuation at 0.35 MHz	> 60 dB
Attenuation at 3.65 MHz	> 60 dB
Source and Load	50 Ω

Physical Dimensions

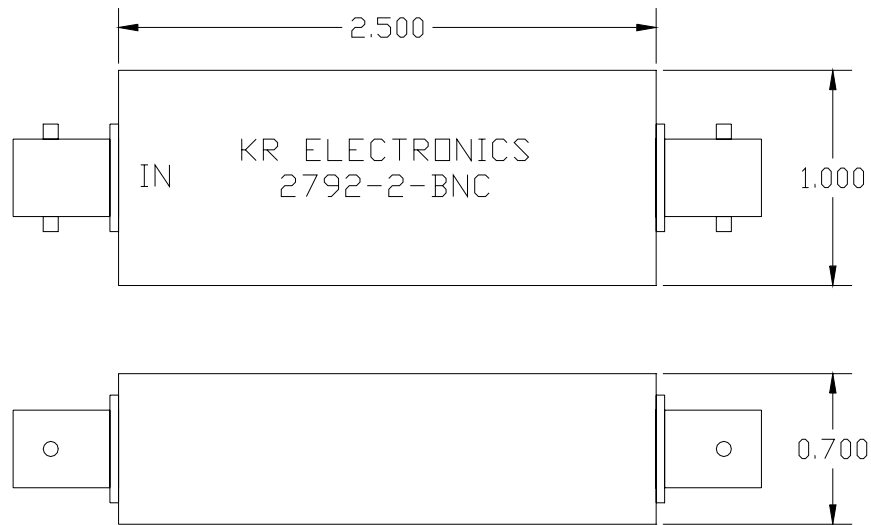

Dimensions in inches