


SPECIFICATIONS

FREQUENCY RANGE: DC TO 18 GHz
 IMPEDANCE: 50 OHMS
 INSERTION LOSS: 7.5 dB
 INPUT POWER: 1 WATT AVERAGE
 AMPLITUDE TRACKING: .5 dB
 TEMPERATURE RANGE: -65°C TO +125°C
 PHASE TRACKING: $\pm 3^\circ$
 MAXIMUM VSWR: 1.30:1
 OUTPUT PORT ARE SYMMETRICAL TO MALE INPUT

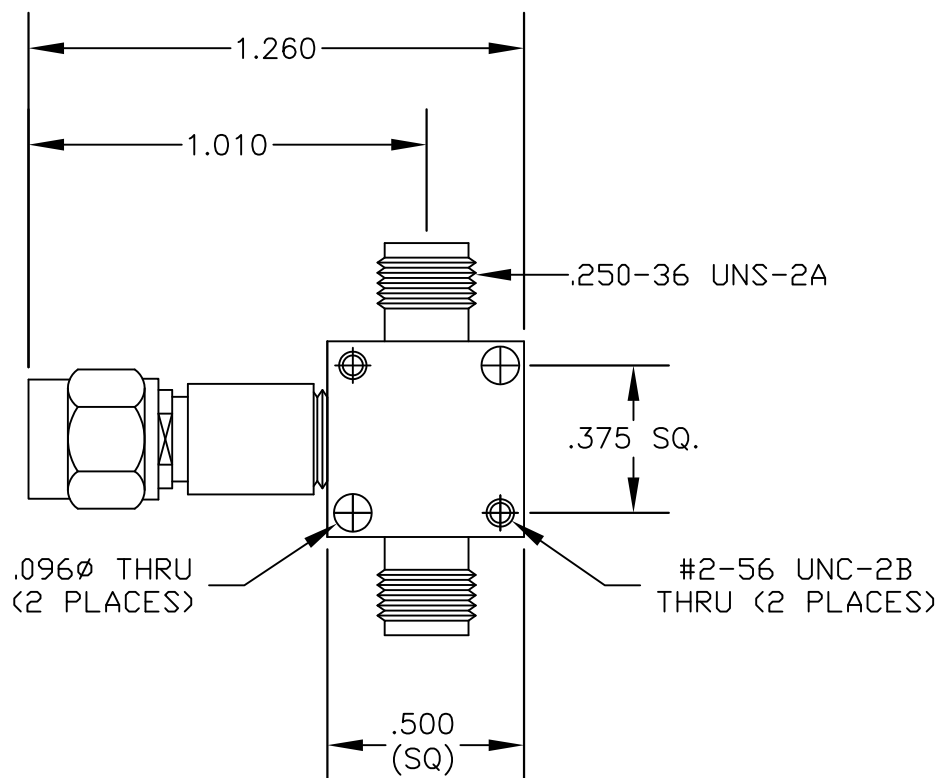

PASTERNACK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE2068

DES.

SMA FEMALE-MALE-FEMALE, RESISTIVE
 POWER DIVIDER, FREQUENCY RANGE: DC
 TO 18 GHz

SIZE A

FSCM NO. 53919

CAD FILE

070302

SCALE N/A

127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.