
Silicon Power Rectifier
S/R34 Series

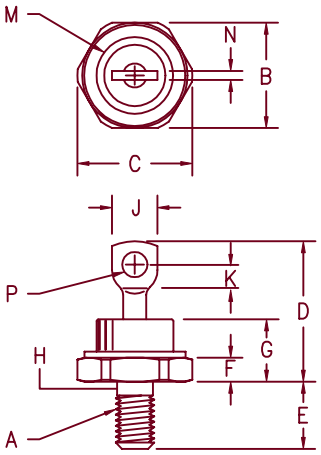

Notes:
1. Full threads within 2 1/2 threads
2. Standard Polarity: Stud is Cathode
   Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	---	---	---	---	1/4-28
B	.677	.687	17.19	17.44	
C	---	.793	---	20.14	
D	---	1.00	---	25.40	
E	.427	.447	10.84	11.35	
F	.115	.200	2.92	5.08	
G	---	.450	---	11.43	
H	.220	.249	5.59	6.32	1
J	---	.375	---	9.52	
K	.156	---	3.97	---	
M	---	.667	---	16.94	Dia
N	---	.080	---	2.03	
P	.140	.175	3.56	4.44	Dia

DO203AB (D05)

Microsemi Catalog Number	Peak Reverse Voltage
Standard	
*S3410	100V
*S3420	200V
*S3440	400V
*S3460	600V
*S3480	800V
*S34100	1000V
*S34120	1200V
*S34140	1400V
*S34160	1600V

*Change S to R in part number for Reverse Polarity

- Glass Passivated Die
- 800A surge rating
- Glass to metal seal construction
- V_{RRM} to 1600V

Electrical Characteristics

Average forward current	$I_{F(AV)}$ 45 Amps	T_C = 123°C, half sine wave, $R_{\theta JC}$ = 1.75°C/W
Maximum surge current	I_{FSM} 800 Amps	8.3ms, half sine, T_J = 200°C
Max I^2t for fusing	I^2t 2600 A^2s	
Max peak forward voltage	V_{FM} 1.15 Volts	I_{FM} = 90A; T_J = 25°C *
Max peak reverse current	I_{RM} 10 µA	V_{RRM}, T_J = 25°C
Max peak reverse current	I_{RM} 2.0 mA	V_{RRM}, T_J = 150°C
Max Recommended Operating Frequency	10kHz	

*Pulse test: Pulse width 300 µsec. Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T_{STG}	-65°C to 200°C
Operating junction temp range	T_J	-65°C to 200°C
Maximum thermal resistance	$R_{\theta JC}$	1.75°C/W Junction to Case
Mounting torque		25-30 inch pounds
Weight		.5 ounces (14 grams) typical

12-5-00 Rev. 1

COLORADO Microsemi
800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469-2161
FAX: (303) 466-3775
www.microsemi.com

S/R34

Figure 1
Typical Forward Characteristics

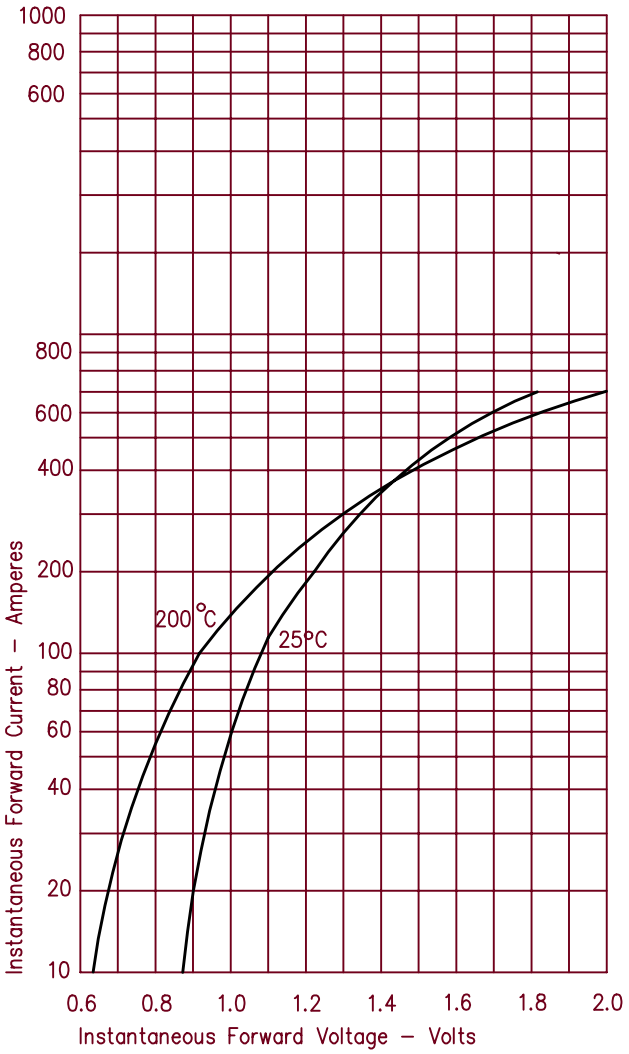


Figure 2
Typical Reverse Characteristics

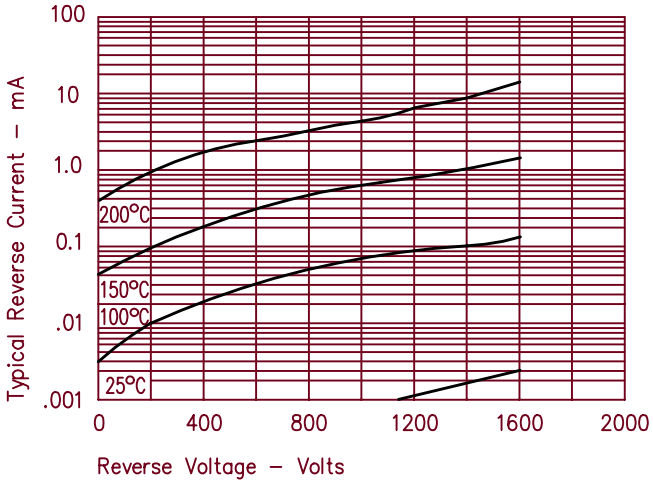


Figure 3
Forward Current Derating

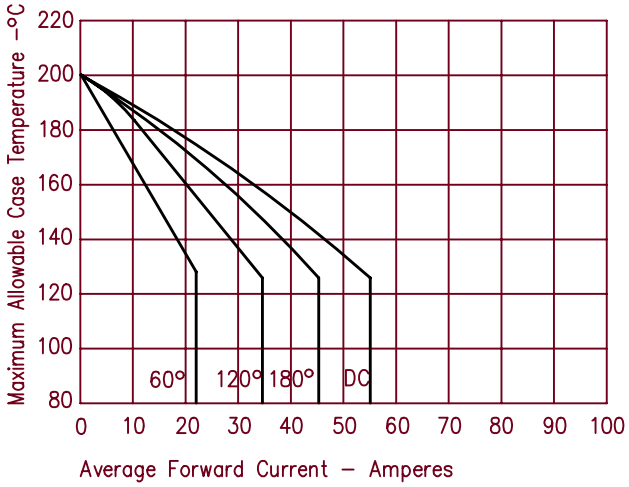


Figure 4
Maximum Forward Power Dissipation


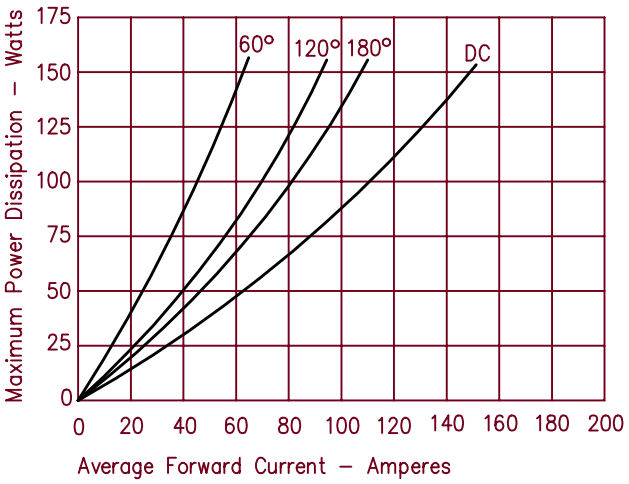


Figure 5
Transient Thermal Impedance

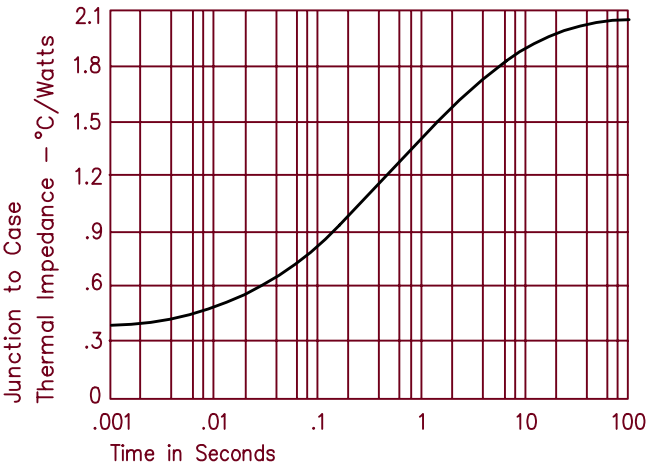

12–5–00 Rev. 1