Printed-circuit board connector - PCC 4/10-ST-7,62 - 1840117

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Plug component, Nominal current: 20 A, Rated voltage (III/2): 1000 V, Number of positions: 10, Pitch: 7.62 mm, Connection method: Crimp connection, Color: green, Corresponding female crimp contacts with current [A] and conductor cross section range [mm²] data: 13,5A/STG-MTN 0,5-1,0 (3190438); 13,5A/STG-MTN 0,5-1,0 BA (3190629); 20A/STG-MTN 1,5-2,5 (3190506); 20A/STG-MTN 1,5-2,5 BA (3190632). BA = Taped contacts

Product Features

- Crimp contacts available loose and on tape
- Compatible with PC 4 headers for the PCB and DIN-rail mountable PCVK 4 and UPCV3K headers
- Plug-in direction parallel to the conductor axis
- Low design height of the PCC 4 series
- Snap-lock option for pull-out aid

Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	10.4 GRM
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Pitch	7.62 mm
Dimension a	68.58 mm

General

Range of articles	PCC 4/..-ST
Insulating material group	I
Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/3)	400 V

Printed-circuit board connector - PCC 4/10-ST-7,62 - 1840117

Technical data

General

Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	20 A
Nominal cross section	4 mm²
Maximum load current	20 A
Insulating material	PA
Inflammability class according to UL 94	V0
Number of positions	10

Connection data

Conductor cross section stranded min.	0.5 mm²
Conductor cross section stranded max.	2.5 mm²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	14
Minimum AWG according to UL/CUL	20
Maximum AWG according to UL/CUL	14

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440309

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002638
ETIM 5.0	EC002638

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409

Printed-circuit board connector - PCC 4/10-ST-7,62 - 1840117

Classifications

UNSPSC

UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

CSA

	B	C
mm²/AWG/kcmil	20-14	20-14
Nominal current IN	10 A	10 A
Nominal voltage UN	300 V	300 V

UL Recognized

	B	C
mm²/AWG/kcmil	20-14	20-14
Nominal current IN	10 A	10 A
Nominal voltage UN	600 V	600 V

Printed-circuit board connector - PCC 4/10-ST-7,62 - 1840117

Approvals

cUL Recognized

	B	C
mm²/AWG/kcmil	20-14	20-14
Nominal current IN	10 A	10 A
Nominal voltage UN	600 V	600 V


GOST

GOST

cULus Recognized

Drawings

Dimensioned drawing

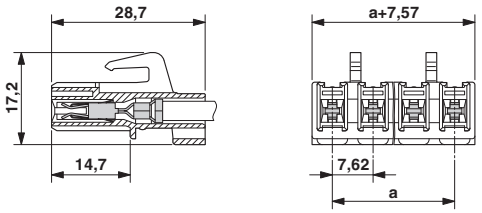

Phoenix Contact 2014 © - all rights reserved
http://www.phoenixcontact.com