
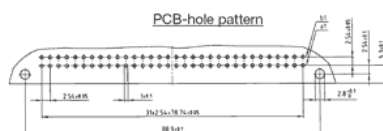



Male connector
Contact spacing
.100" and .200"

[illegible]

Premating contacts available in row "a" and "b", please consult factory.

Solder pin

angled with clip



No. of Pos.	• = contact + = no contact	angled	Solder pin	angled with clip
32	Pos. 1 2 3 4 5 ... row b + + + + + row a • • • • •	121 A 10019 X	121 A 10049 X	121 A 20819 X
32	Pos. 1 2 3 4 5 ... row b + • + • + • row a + • + • + •	121 A 10029 X	121 A 10059 X	121 A 20829 X
64	Pos. 1 2 3 4 5 ... row b • • • • • row a • • • • •	121 A 10039 X	121 A 10069 X	121 A 20839 X

1 von 1