



| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | N/A    | OFF    |
| 1-2               | N/A    | NONE   |







CIRCUIT: SPST  
ON - OFF

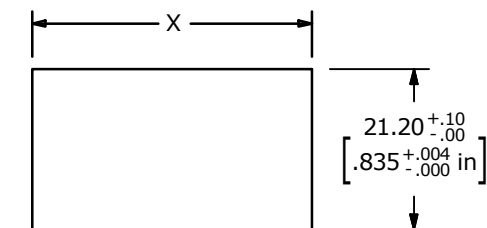

RECOMMENDED PANEL CUT-OUT

| PANEL THICKNESS | X                     |
|-----------------|-----------------------|
| 1.0 - 1.5       | 37.3 $^{+0.0}_{-0.1}$ |
| 2.5 - 3.0       | 37.5 $^{+0.0}_{-0.1}$ |
| 3.5 - 4.5       | 37.7 $^{+0.0}_{-0.1}$ |

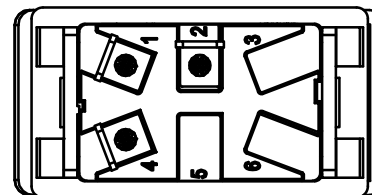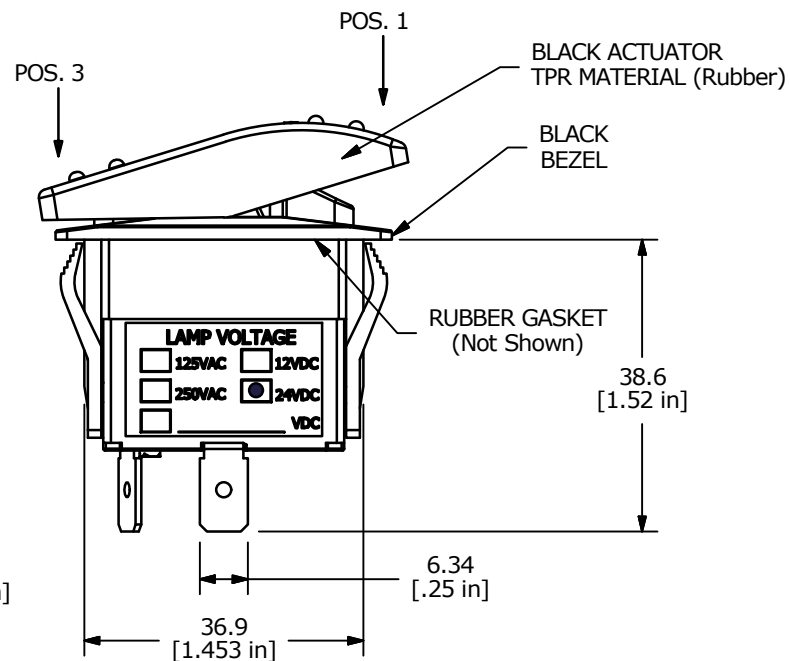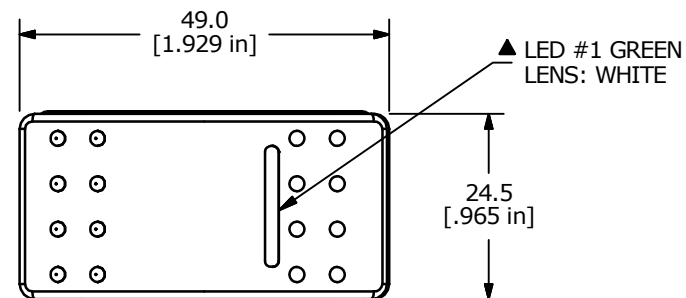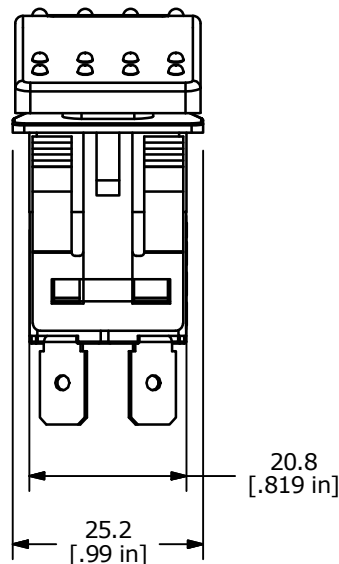

## NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- TERM. NOS. FOR REF. ONLY
- RATING: 16A @ 30VDC, 50/60 Hz,  $\mu$ T55  
UL LISTED
- ELECTRICAL LIFE: 10,000 CYCLES
- MECHANICAL LIFE: 30,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- INSULATION RESISTANCE: >100 MOHMS @ 500VDC
- OPERATING TEMP: 0°C to 55°C
- LED: GREEN, 24VDC
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT



E-SWITCH®

TITLE R711FB2-SXXX3BDGNW

|     |        |             |         |    |
|-----|--------|-------------|---------|----|
| A   | 21853  | New Release | 5/26/15 | MW |
| REV | PCR NO | DESCRIPTION | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|              |                   |          |                |          |
|--------------|-------------------|----------|----------------|----------|
| SCALE<br>1:1 | DATE<br>5/26/2015 | DR<br>MW | DWG<br>C700023 | REV<br>A |
|--------------|-------------------|----------|----------------|----------|