### Measurement condition

| | | |
|---|---|---|
| Ambient temperature: | 23 | °C |
| Input power level: | 0 | dBm |
| Terminating impedance: | | |
| Input: | 50 | Ω |
| Output: | 50 | Ω |

### Characteristics

Remark:
The maximum attenuation in the pass band is defined as the insertion loss $a_e$. The nominal frequency $f_N$ is fixed at 942,5 MHz without any tolerance or limit. The values of absolute attenuation $a_{abs}$ are guaranteed for the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

| **D a t a** | | **typ. value** | | **tolerance / limit** | | |
|---|---|---|---|---|---|---|
| **Insertion loss** | $a_e$ | 1,8 | dB | max. | 4,5 | dB |
| **Nominal frequency** | $f_N$ | - | | | 942,5 | MHz |
| **Passband** | | - | | $f_N$ ± | 17,5 | MHz |
| **Absolute attenuation** | $a_{abs}$ | | | | | |
| 0,1 MHz ... 905 MHz | | 26 | dB | min. | 20 | dB |
| 905 MHz ... 915 MHz | | 13 | dB | min. | 8 | dB |
| 980 MHz ... 2200 MHz | | 30 | dB | min. | 20 | dB |
| 2200 MHz … 3120 MHz | | 10 | dB | min. | 7 | dB |
| **Return loss within PB** | | 8,5 | dB | min. | 6 | dB |
| **Input power level** | | - | | max. | 16 | dBm |
| **Operating temperature range** | OTR | - | | - 40 °C ... | + 85 °C | |
| **Storage temperature range** | | - | | - 40 °C ... | + 85 °C | |
| **Temperature coefficient of frequency** | $TC_f$ * | - 43 | ppm/K | | - | |

*) $\Delta f_C(Hz) = Tc_f(ppm/K) \times (T - T_o) \times f_{CAT}$ (MHz).


**Generated:**


**Checked / Approved:**

**Vectron International GmbH & Co. KG**
**Potsdamer Straße 18**
**D 14 513 TELTOW / Germany**
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**
**E-Mail:** tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.


## Filter characteristic

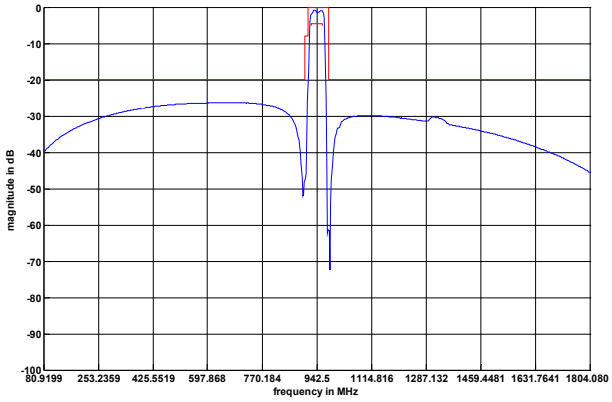

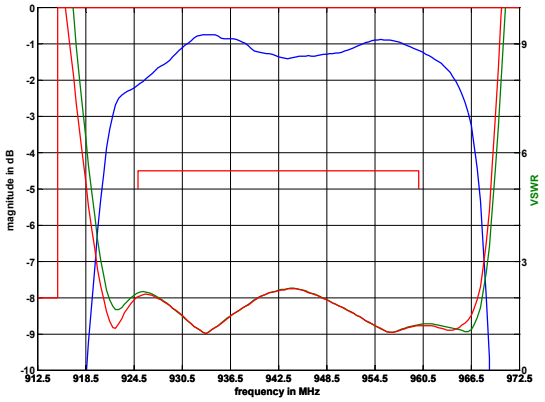
## Construction and pin connection


(All dimensions in mm)

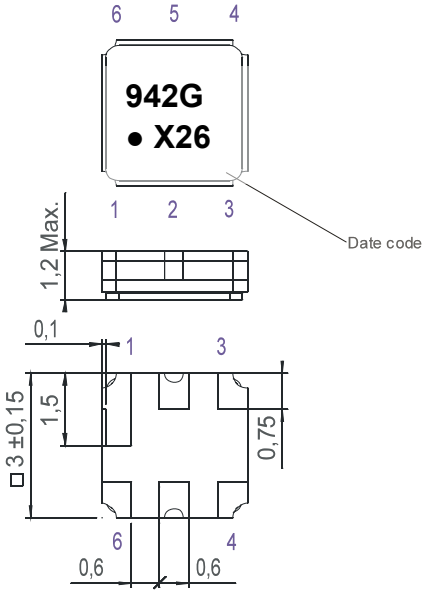


| | |
|---|---|
| 1 | Ground |
| 2 | Input |
| 3 | Ground |
| 4 | Ground |
| 5 | Output |
| 6 | Ground |

| Date code: | Year + week |
|---|---|
| X | 2009 |
| A | 2010 |
| B | 2011 |
| ... | |

## 50 Ω Test circuit

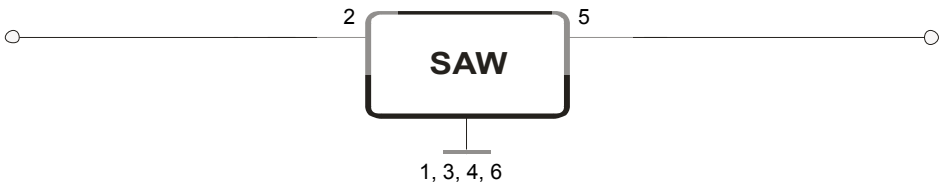


**Vectron International GmbH & Co. KG**
**Potsdamer Straße 18**
**D 14 513 TELTOW / Germany**
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**
**E-Mail:** tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

### Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

| | |
|---|---|
| 1. Shock: | 500g, 1 ms, half sine wave, 3 shocks each plane;<br>DIN IEC 68 T2 - 27 |
| 2. Vibration: | 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;<br>DIN IEC 68 T2 - 6 |
| 3. Change of temperature: | -55 °C to 125°C / 30 min. each / 10 cycles<br>DIN IEC 68 part 2 – 14 Test N |
| 4. Resistance to solder heat (reflow): | reflow possible: three times max.;<br>for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4; |
| 5. ESD | MIL-STD-883E using coupling network of ISO 10605 and EN 6100-4-2<br>HBM:250V; CDM:V; |

This filter is RoHS compliant (2002/95/EG, 2005/618/EG)


### Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

| | |
|---|---|
| max. pieces of filters per reel: | 9000 |
| reel of empty components at start: | min. 300 mm |
| reel of empty components at start including leader: | min. 500 mm |
| trailer: | min. 300 mm |


**Tape (all dimensions in mm)**

| | | |
|---|---|---|
| W | : | 8,00 ± 0,3 |
| Po | : | 4,00 ± 0,1 |
| Do | : | 1,50 +0,1/-0 |
| E | : | 1,75 ± 0,1 |
| F | : | 3,50 ± 0,05 |
| G(min) | : | 0,75 |
| P2 | : | 2,00 ± 0,05 |
| P1 | : | 4,00 ± 0,1 |
| D1(min) | : | 1,50 |
| Ao | : | 3,25 ± 0,1 |
| Bo | : | 3,25 ± 0,1 |
| Ct | : | 5,5 ± 0,1 |

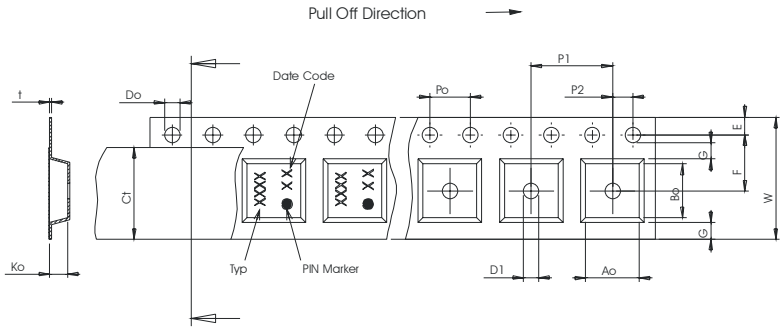


**Reel (all dimensions in mm)**

| | | |
|---|---|---|
| A | : | 330 |
| W1 | : | 8,4 +1,5/-0 |
| W2(max) | : | 14,4 |
| N(min) | : | 50 |
| C | : | 13,0 +0,5/-0,2 |

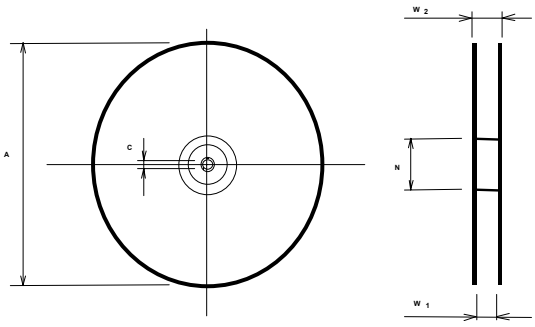


The minimum bending radius is 45 mm.


**Vectron International GmbH & Co. KG**
**Potsdamer Straße 18**
**D 14 513 TELTOW / Germany**
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**
**E-Mail:** tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**Air reflow temperature conditions**

| **Conditions** | **Exposure** |
|---|---|
| Average ramp-up rate (30°C to 217°C) | less than 3°C/second |
| > 100°C | between 300 and 600 seconds |
| > 150°C | between 240 and 500 seconds |
| > 217°C | between 30 and 150 seconds |
| Peak temperature | max. 260°C |
| Time within 5°C of actual peak temperature | between 10 and 30 seconds |
| Cool-down rate (Peak to 50°C) | less than 6°C/second |
| Time from 30°C to Peak temperature | no greater than 300 seconds |

**Chip-mount air reflow profile**

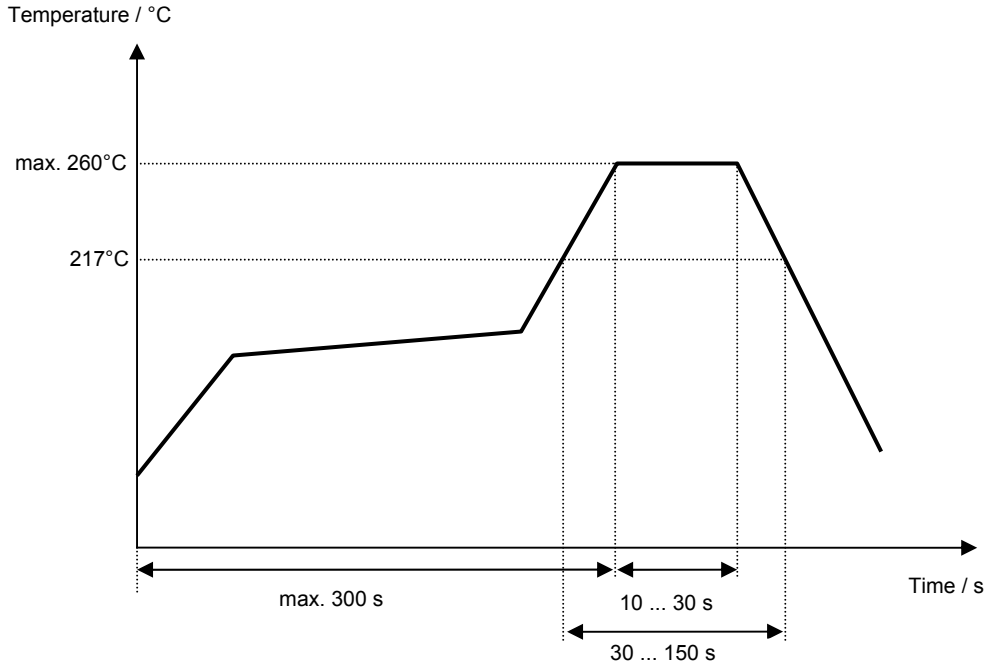


**Vectron International GmbH & Co. KG**
**Potsdamer Straße 18**
**D 14 513 TELTOW / Germany**
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**
**E-Mail:** tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

## History

| Version | Reason of Changes | Name | Date |
|---|---|---|---|
| 1.0 | - Generation of development specification | S.Springfeldt | 09.04.2009 |
| 1.1 | - Add typical values, add filter characteristic<br>- Generation of filter specification | S. Channaa | 26.06.2009 |

**Vectron International GmbH & Co. KG**
**Potsdamer Straße 18**
**D 14 513 TELTOW / Germany**
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**
**E-Mail:** tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.