AOZ8302ACI

Two-line High Current Surge TVS Diodes

General Description

The AOZ8302ACI is a high current surge transient voltages suppressor diode designed to protect voltage sensitive electronics from high current surge and ESD.

This device incorporates two high current surge TVS diodes in a small SOT23-3L package. It may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 (±15kV air, ±8kV contact discharge).

The AOZ8302ACI comes in an RoHS compliant SOT23-3L package and is rated over a -40°C to +125°C ambient temperature range.

The small SOT23-3L package makes it ideal for applications where PCB space is a premium. The small size and high ESD protection makes it ideal for protecting voltage sensitive electronics from high transient conditions and ESD.

Features

- ESD and high current surge protection:
  AOZ8302ACI-05 (5V version):
  - Exceeds: IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
  - Human Body Model (HBM) ±30kV
  - IEC 61000-4-5 (Lightning) 32A (8/20μs)


  AOZ8302ACI-12 (12V version):
  - Exceeds: IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
  - Human Body Model (HBM) ±30kV
  - IEC 61000-4-5 (Lightning) 24A (8/20μs)
- Low clamping voltage
- Low operating voltages: 5V, 12V

Applications

- Ethernet
- Datacom Interfaces
- Telecom Interfaces


Green Product

Typical Application

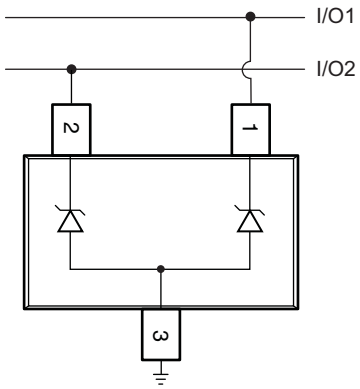

Protection of Two Lines

Pin Configuration



SOT-23
(Top View)

Ordering Information

Part Number	Ambient Temperature Range	Package	Environmental
AOZ8302ACI-05	-40°C to +85°C	SOT23-3L	Green Product
AOZ8302ACI-12			

AOS Green Products use reduced levels of Halogens, and are also RoHS compliant.
Please visit www.aosmd.com/media/AOSGreenPolicy.pdf for additional information.

Absolute Maximum Ratings

Exceeding the Absolute Maximum ratings may damage the device.

Parameter	Rating	
	5V	12V
VP – VN	5V	12V
Peak Pulse Current (I_{PP}), t_P = 8/20µs	32A	24A
Storage Temperature (T_S)	-65°C to +150°C	-65°C to +150°C
ESD Rating per IEC61000-4-2, Contact(1)	±30kV	±30kV
ESD Rating per IEC61000-4-2, Air(1)	±30kV	±30kV
ESD Rating per Human Body Model(2)	±30kV	±30kV


Notes:

1. IEC 61000-4-2 discharge with $C_{Discharge}$ = 150pF, $R_{Discharge}$ = 330Ω.
2. Human Body Discharge per MIL-STD-883, Method 3015 $C_{Discharge}$ = 100pF, $R_{Discharge}$ = 1.5kΩ.

Maximum Operating Ratings

Parameter	Rating
Junction Temperature (T_J)	-40°C to +85°C

Electrical Characteristics

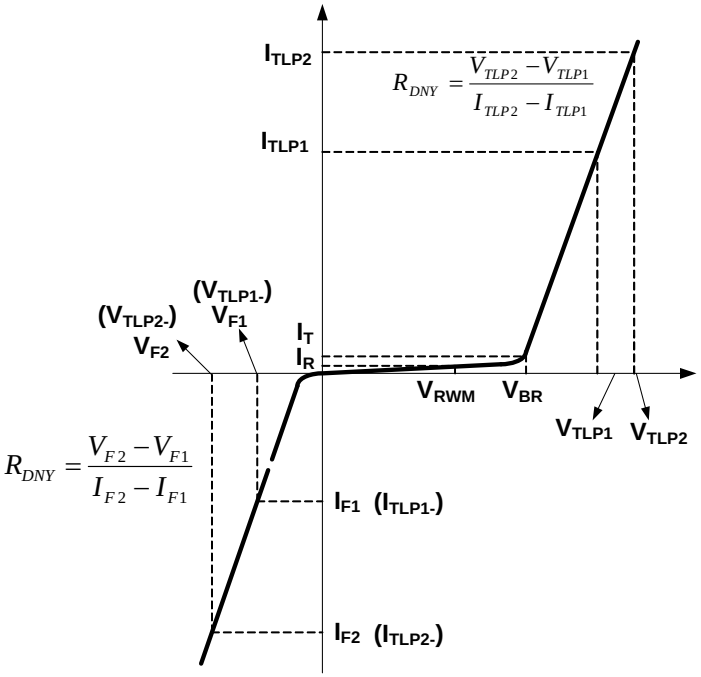

T_A = 25°C unless otherwise noted.

AOZ8302ACI-05						
Symbol	**Parameter**	**Condition**	**Min.**	**Typ.**	**Max.**	**Units**
V_{RWM}	Reverse Working Voltage	I/O Pin to ground			5	V
V_{BR}	Reverse Breakdown Voltage	I_T=1mA, I/O Pin to ground	6			V
I_R	Reverse Leakage Current	V_{RWM}=5V, I/O Pin to ground			1	µA
V_F	Forward Voltage	I_F=15mA		0.85		V
V_{CL}	Clamping Voltage(3, 4) (100ns Transmission Line Pulse, I/O Pin to ground)	I_{TLP}=1A I_{TLP}=-1A		11 -1	14 -2.5	V
		I_{TLP}=30A I_{TLP}=-30A		14 -5	17 -7	V
	Clamping Voltage(3) (IEC61000-4-5, 8/20µs, I/O Pin to ground)	I_{PP}=2A I_{PP}=-2A		11 -1.8	14.5 -3.5	V
		I_{PP}=32A I_{PP}=-32A		20 -7	24 -9	V
R_{DNY}	Dynamic Resistance(3, 4)	I_{TLP}= 1A to 30A I_{TLP}= -1A to -30A		0.1 0.1		Ω
C_J	Junction Capacitance	V_{Pin1}=0V, f=1MHz, Pin1 to ground		20		pF

Electrical Characteristics (continued)

AOZ8302ACI-12						
Symbol	**Parameter**	**Condition**	**Min.**	**Typ.**	**Max.**	**Units**
V_{RWM}	Reverse Working Voltage	I/O Pin to ground			12	V
V_{BR}	Reverse Breakdown Voltage	I_T=1mA, I/O Pin to ground	13			V
I_R	Reverse Leakage Current	V_{RWM}=12V, I/O Pin to ground			1	µA
V_F	Forward Voltage	I_F=15mA		0.85		V
V_{CL}	Clamping Voltage(3, 4) (100ns Transmission Line Pulse, I/O Pin to ground)	I_{TLP}=1A I_{TLP}=-1A		16 -1	19 -2.5	V
		I_{TLP}=30A I_{TLP}=-30A		19 -4.5	22 -6.5	V
	Clamping Voltage(3) (IEC61000-4-5, 8/20µs, I/O Pin to ground)	I_{PP}=1A I_{PP}=-1A		12 -12	14 -14	V
		I_{PP}=24A I_{PP}=-24A		23 -5	27 -7	V
R_{DNY}	Dynamic Resistance(3, 4)	I_{TLP}= 1A to 30A I_{TLP}= -1A to -30A		0.1 0.1		Ω
C_J	Junction Capacitance	V_{Pin1}=0V, f=1MHz, Pin1 to ground		20		pF


Notes:

3. These specifications are guaranteed by design and characterization.


4. Measurements performed using a 100ns Transmission Line Pulse (TLP) system.

Typical Performance Characteristics


Positive TLP Clamping
(t_{period} = 100ns, t_{rise} = 1ns)

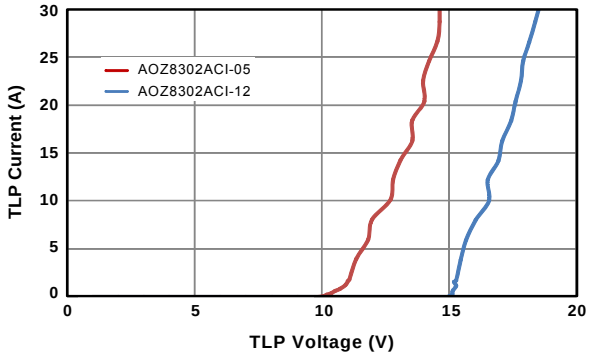


Negative TLP Clamping
(t_{period} = 100ns, t_{rise} = 1ns)

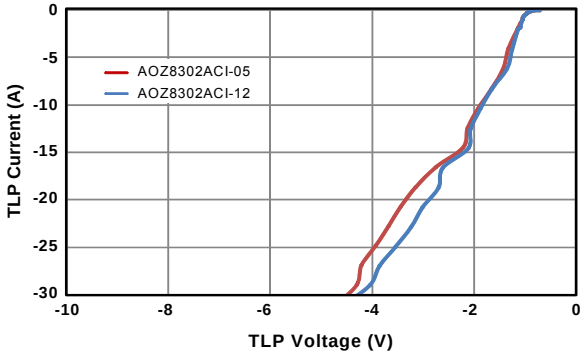


IEC61000-4-5 Surge 8/20µs (Positive)

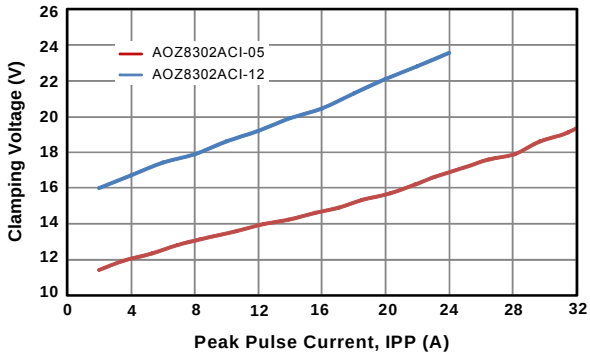


IEC61000-4-5 Surge 8/20µs (Negative)

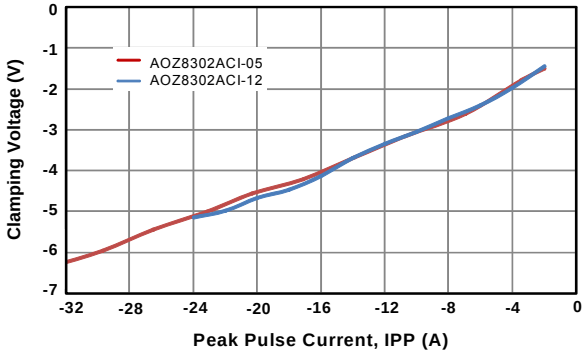


Typical Variation of C_J vs. V_R

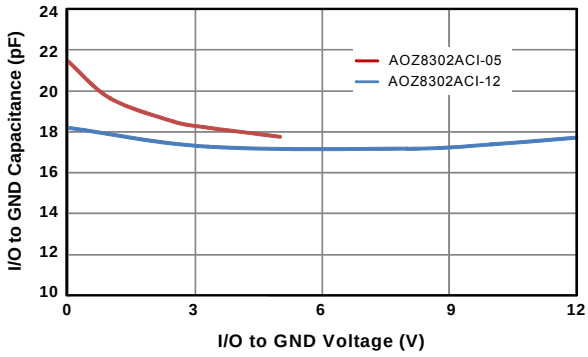

Package Dimensions, SOT23-3L

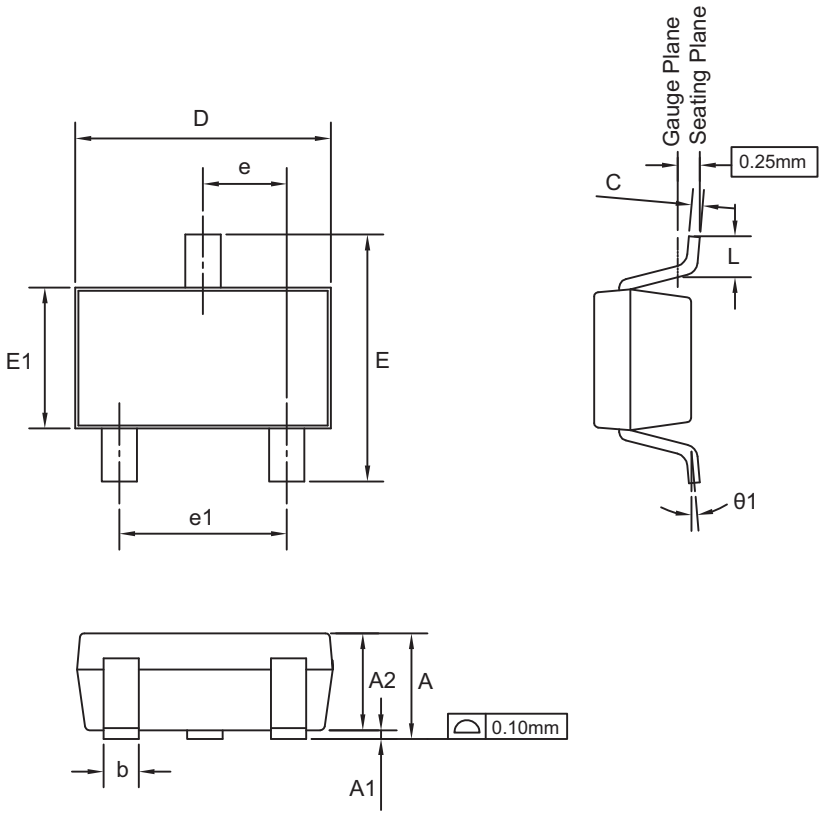

RECOMMENDED LAND PATTERN

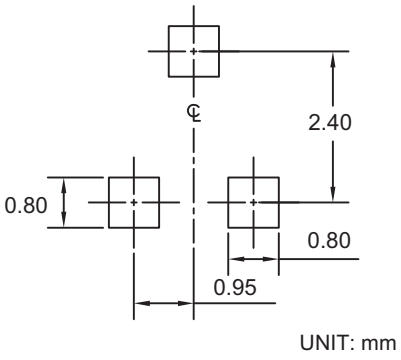

Dimensions in millimeters

Symbols	Min.	Nom.	Max.
A	0.85	—	1.25
A1	0.00	—	0.13
A2	0.70	1.00	1.15
b	0.30	0.40	0.50
c	0.08	0.13	0.20
D	2.80	2.90	3.10
E	2.60	2.80	3.00
E1	1.40	1.60	1.80
e	0.95 BSC		
e1	1.90 BSC		
L	0.30	—	0.60
θ1	0°	5°	8°

Dimensions in inches


Symbols	Min.	Nom.	Max.
A	0.033	—	0.049
A1	0.000	—	0.005
A2	0.028	0.039	0.045
b	0.012	0.016	0.020
c	0.003	0.005	0.008
D	0.110	0.114	0.122
E	0.102	0.110	0.118
E1	0.055	0.063	0.071
e	0.037 BSC		
e1	0.075 BSC		
L	0.012	—	0.024
θ1	0°	5°	8°

Notes:

1. Package body sizes exclude mold flash or gate burrs. Mold flash at the non-lead sides should be less than 5mils each.
2. Tolerance ±0.100mm (4mils) unless otherwise specified.
3. Dimension L is measured in gauge plane.
4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.
5. All dimensions are in millimeters.

Tape and Reel Dimensions, SOT23-3L


Tape

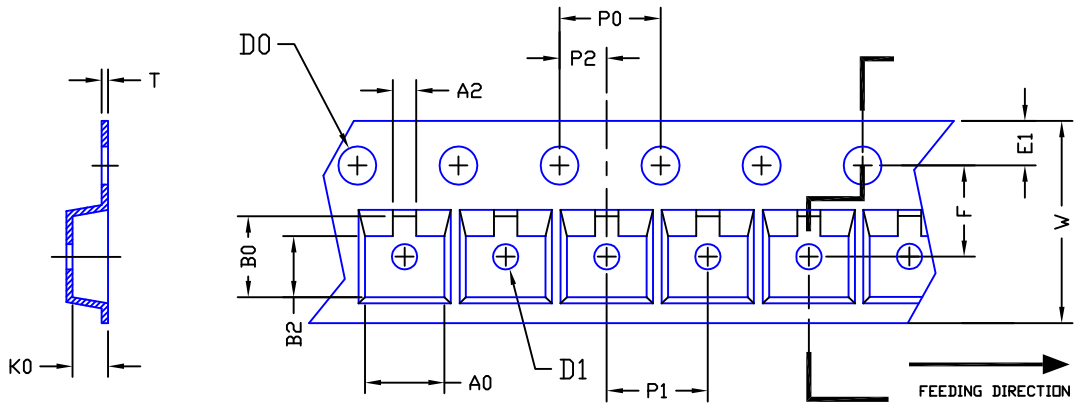

UNIT: MM

PACKAGE	A0	B0	K0	D0	D1	W	E1	F	P0	P1	P2	T	A2	B2
SOT23-3L (8 mm)	3.05-3.40	3.00-3.38	1.20- 1.47	1.55 ±0.05	1.00 ±0.25	8.00 ±0.30	1.75 ±0.10	3.50 ±0.05	4.00 ±0.10	4.00 ±0.10	2.00 ±0.05	0.18 -0.25	0.84-1.24	2.29-2.69

Reel

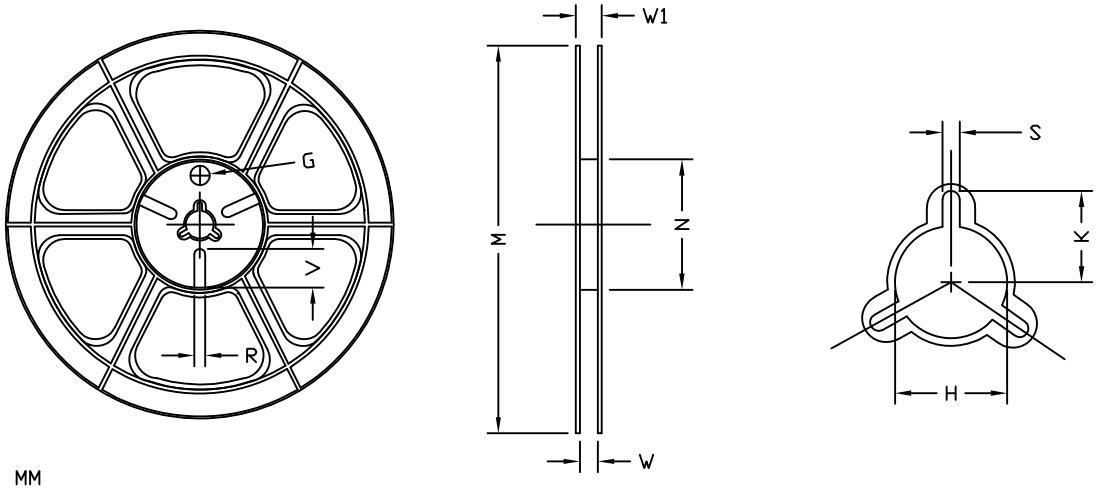


UNIT: MM

TAPE SIZE	REEL SIZE	M	N	W	W1	H	K	S	G	R	V
8 mm	ø178	ø178.00 ±1.00	ø54.00 ±0.50	9.00 ±0.30	11.40 ±1.00	ø13.00 +0.50 -0.20	10.60	2.00 ±0.50	ø9.00	5.00	18.00


Leader/Trailer and Orientation

Unit Per Reel:
3000pcs

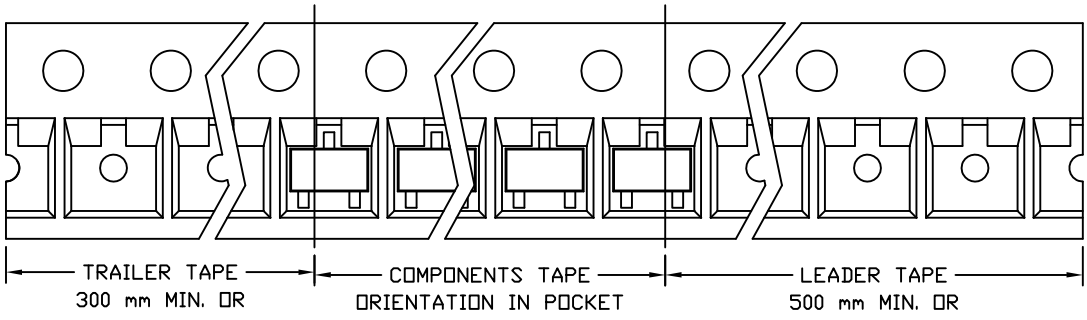


Part Marking

AOZ8302ACI-05

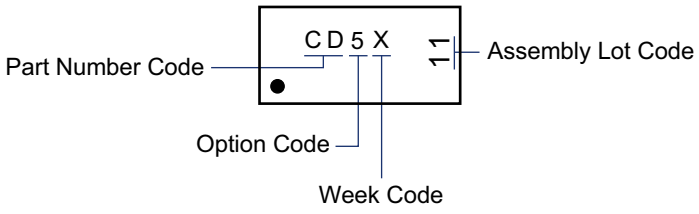

AOZ8302ACI-12

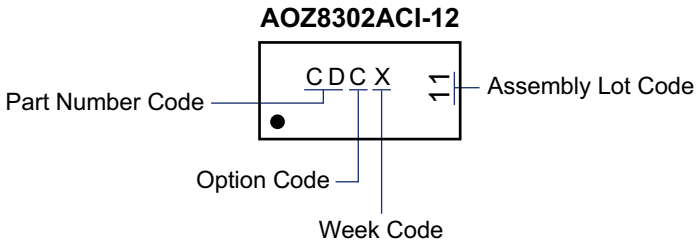

LEGAL DISCLAIMER

Alpha and Omega Semiconductor makes no representations or warranties with respect to the accuracy or completeness of the information provided herein and takes no liabilities for the consequences of use of such information or any product described herein. Alpha and Omega Semiconductor reserves the right to make changes to such information at any time without further notice. This document does not constitute the grant of any intellectual property rights or representation of non-infringement of any third party's intellectual property rights.

LIFE SUPPORT POLICY

ALPHA AND OMEGA SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.

2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.