

## FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

## MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- pprox. Weight: 27mg 0.00086oz

## PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

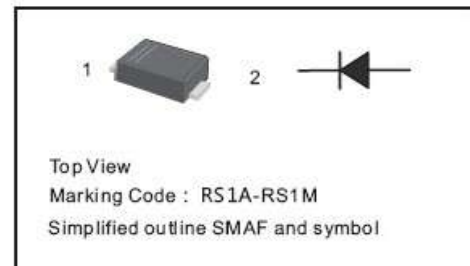

## Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

| Parameter                                                                                         | Symbols                           | RS1AF      | RS1BF | RS1DF | RS1GF | RS1JF | RS1KF | RS1MF | Units |
|---------------------------------------------------------------------------------------------------|-----------------------------------|------------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Repetitive Peak Reverse Voltage                                                           | V <sub>RRM</sub>                  | 50         | 100   | 200   | 400   | 600   | 800   | 1000  | V     |
| Maximum RMS voltage                                                                               | V <sub>RMS</sub>                  | 35         | 70    | 140   | 280   | 420   | 560   | 700   | V     |
| Maximum DC Blocking Voltage                                                                       | V <sub>DC</sub>                   | 50         | 100   | 200   | 400   | 600   | 800   | 1000  | V     |
| Maximum Average Forward Rectified Current at Ta = 65 °C                                           | I <sub>F(AV)</sub>                | 1          |       |       |       |       |       |       | A     |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) | I <sub>FSM</sub>                  | 25         |       |       |       |       |       |       | A     |
| Maximum Instantaneous Forward Voltage at 1 A                                                      | V <sub>F</sub>                    | 1.3        |       |       |       |       |       |       | V     |
| Maximum DC Reverse Current Ta = 25 °C<br>at Rated DC Blocking Voltage Ta =125 °C                  | I <sub>R</sub>                    | 5<br>100   |       |       |       |       |       |       | μA    |
| Maximum Reverse Recovery Time 1)                                                                  | t <sub>rr</sub>                   | 150        |       |       |       | 250   | 500   |       | ns    |
| Typical Junction Capacitance 2)                                                                   | C <sub>j</sub>                    | 15         |       |       |       |       |       |       | pF    |
| Operating and Storage Temperature Range                                                           | T <sub>J</sub> , T <sub>stg</sub> | -55 ~ +150 |       |       |       |       |       |       | °C    |

1) Measured with  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $t_{rr} = 0.25\text{ A}$

2) Measured at 1MHz and applied reverse voltage of 4V D.C

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

REV.07



www.shike.tw

Fig.1 Forward Current Derating Curve

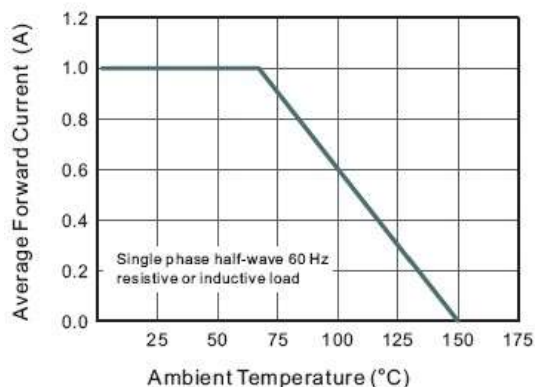


Fig.2 Typical Reverse Characteristics

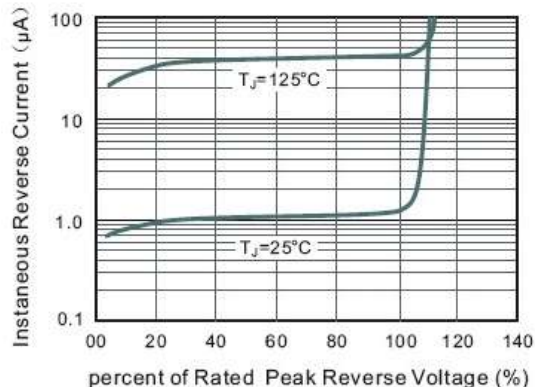


Fig.3 Typical Instantaneous Forward Characteristics

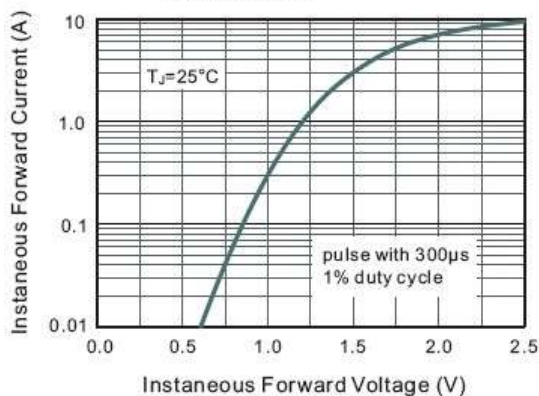


Fig.4 Typical Junction Capacitance


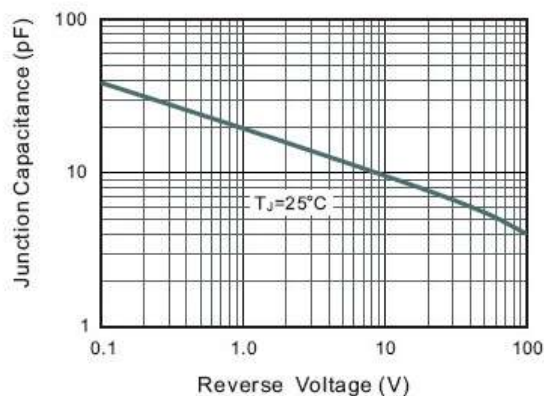



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

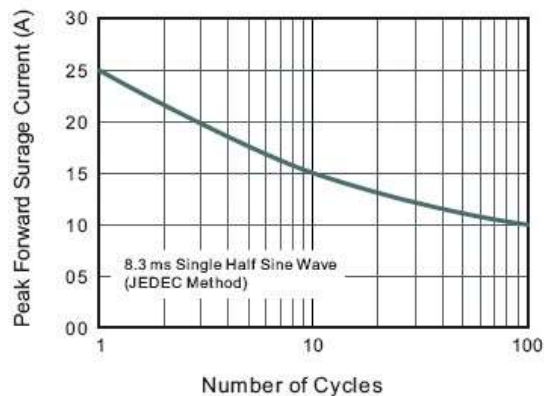

## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SMAF

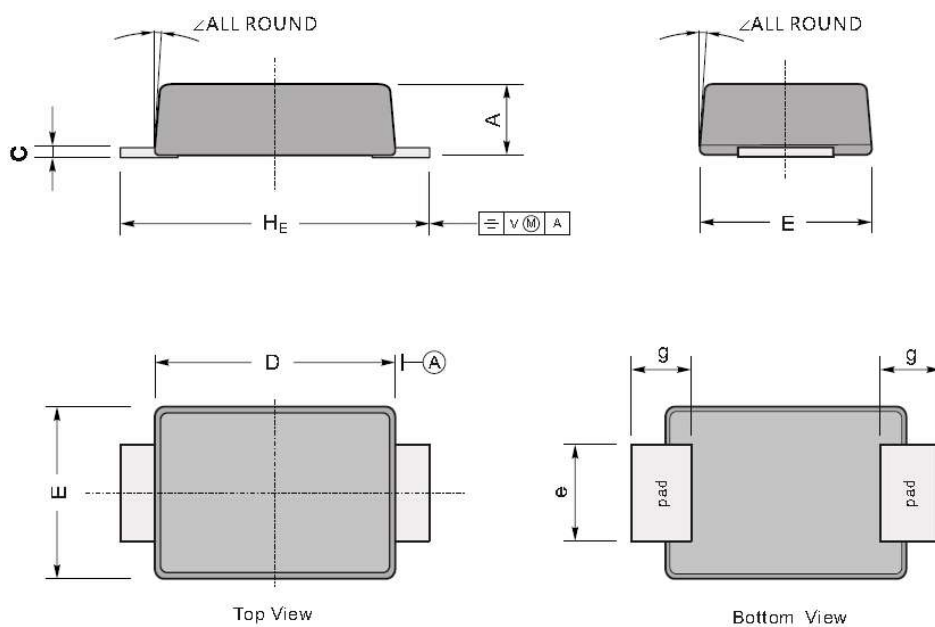

| UNIT |     | A   | C    | D   | E   | e   | g   | H <sub>E</sub> | ∠  |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm   | max | 1.1 | 0.20 | 3.7 | 2.7 | 1.6 | 1.2 | 4.9            | 7° |
|      | min | 0.9 | 0.12 | 3.3 | 2.4 | 1.3 | 0.8 | 4.4            |    |
| mil  | max | 43  | 7.9  | 146 | 106 | 63  | 47  | 193            |    |
|      | min | 35  | 4.7  | 130 | 94  | 51  | 31  | 173            |    |

### The recommended mounting pad size

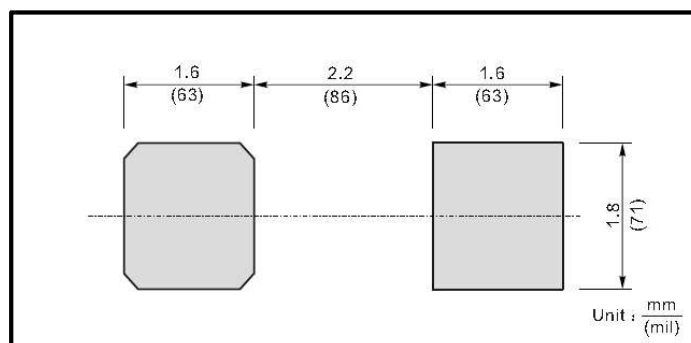

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

REV.07

