- 15, 26, 44, 62 or 78 way
- Stamped & Formed Contacts
- Gold Plated Contacts
- Tin Plated Metal Housing
- Low cost



SPECIFICATION


Mechanical:

Insulator:	PBT +30% Glass Fibre UL94V-0
Pin contacts:	Phosphor Bronze Gold Plated
Shell:	Steel, SPCC Nickel and Tin Plated


Electrical Data:

Rated Voltage:	350V AC
Rated Current:	5A
With stand Voltage:	500V AC(rms)
Insulation Resistance:	Over 1000 MΩ
Contact Resistance:	5 MΩ at 1A
Temperature:	-20˚C to 100˚C

OUTLINE DRAWING

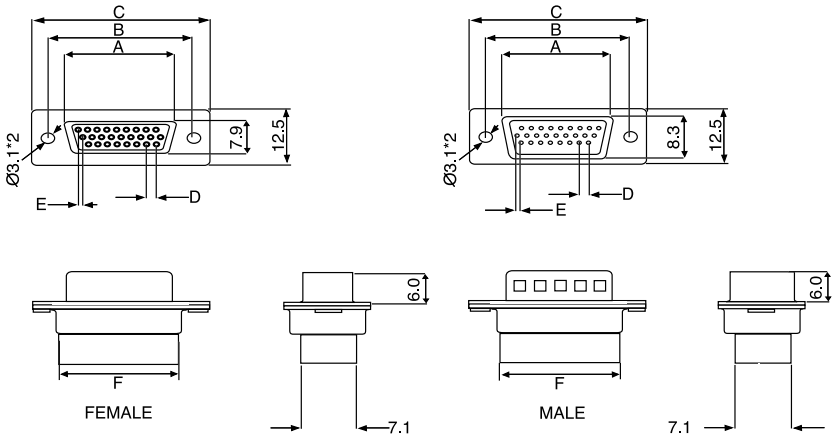

POSITION	A	B	C	D	E	F
15 F	16.30	25.00	30.8	2.29	1.14	19.2
26 F	24.60	33.30	39.2	2.29	1.14	27.7
44 F	38.30	47.10	53.1	2.29	1.14	41.1
62 F	54.80	63.50	69.4	2.41	1.20	57.3
78F	52.20	61.00	67.0	2.41	-	55.1

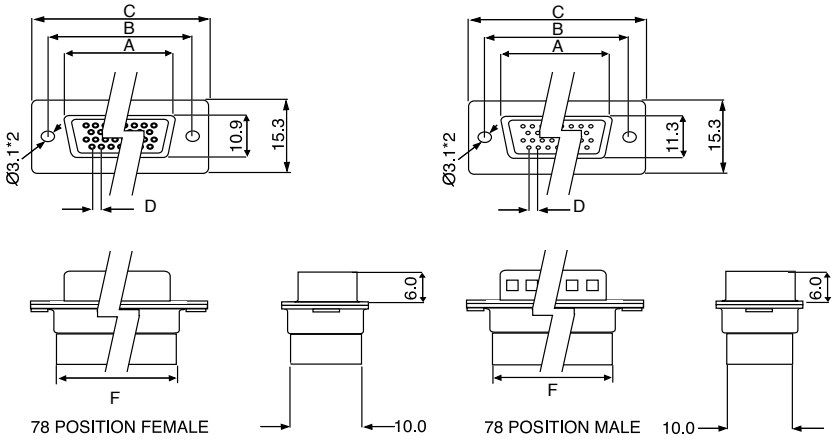

POSITION	A	B	C	D	E	F
15 M	16.92	25.00	30.8	2.29	1.14	19.2
26 M	25.25	33.30	39.2	2.29	1.14	27.7
44 M	38.96	47.10	53.1	2.29	1.14	41.1
62 M	55.42	63.50	69.4	2.41	1.20	57.3
78M	52.81	61.00	67.0	2.41	-	55.1

ORDERING INFORMATION

Housing

DBC	HD	F	CD	26
Dubilier Connectors	Series HD= High Density	Connector Type M = Male F = Female	Contact Style CD= Crimp Contact Housing	Nº of Ways 15 = 15ways 26 = 26ways 44 = 44ways 62 = 62ways 78 = 78ways

Contacts

DBC	HDCD	F	PIN
Dubilier Connectors	Series HDCD= Crimp Contact	Contact Type M = Male F = Female	Pin

SECTION 11